






NINE

Modules of Automation

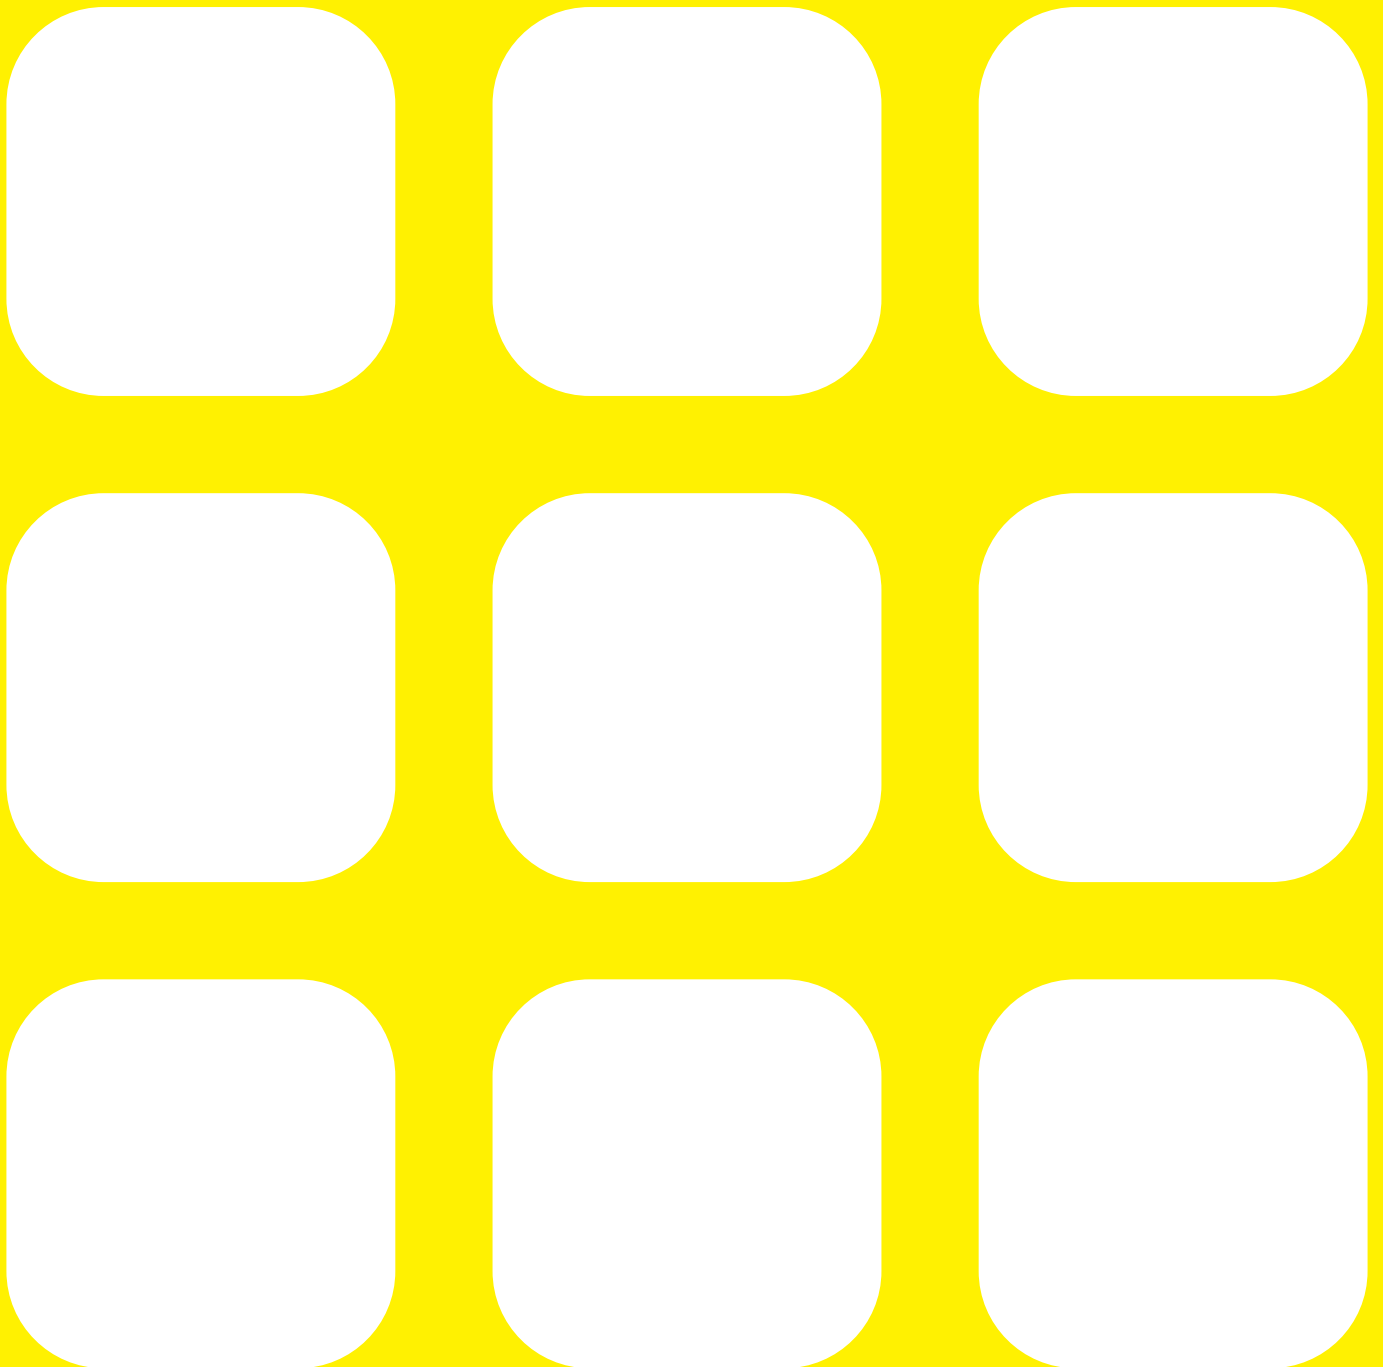

NINE

Modules of Automation

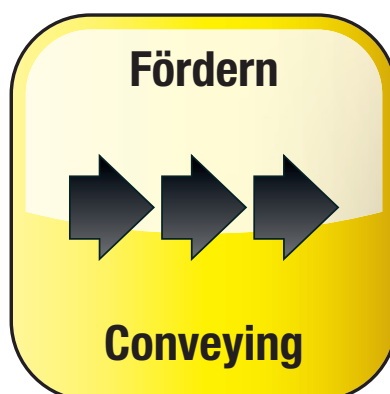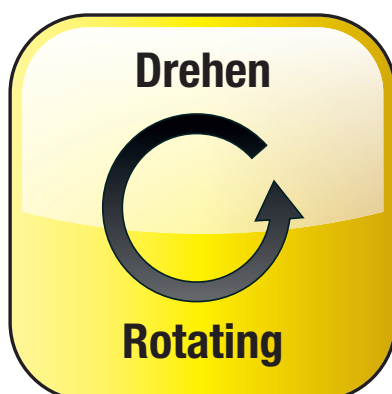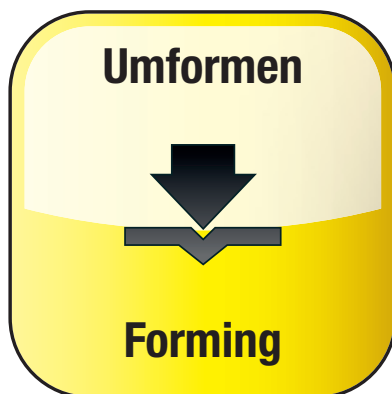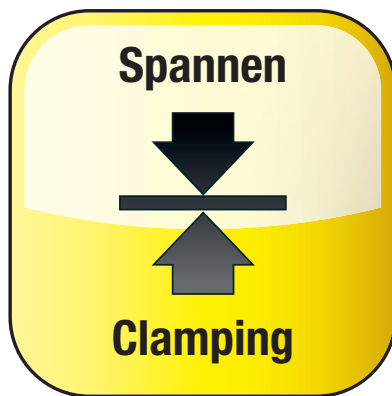

Nine Modules of Automation

When you mention the name TÜNKERS in our industry, the products that immediately come to mind are TÜNKERS clamps. During the 1970s, the patented toggle-locked clamp was a tool that pointed the way to the current fully-automated systems. Today, due to a wide variety of developments – some of them patented – TÜNKERS is well-known in the field of positioning and traversing, in forming technology and for modular gripper systems.

TÜNKERS has expanded into other fields as well. EXPERT and SOPAP, with rotary indexing tables, now form part of the TÜNKERS product range, just as well as the APM conveyor systems. In January 2016, TÜNKERS-NICKEL GmbH was added to the range with dosing units, with the emphasis on bonding technology.


Clamping, positioning, gripping, forming, welding, dosing, rotating, conveying and transporting – today these 'Nine Modules of Automation' in the field of industrial robots represent the range of products offered by the TÜNKERS Group.

For the first time, we have incorporated this TÜNKERS range into a catalogue. By doing so, we have drawn a line under the separate catalogues, which have been overtaken by the Internet and rapid access to the World-wide Web. Nonetheless, we are firmly convinced that paper – and in the case the overview catalogue – still has its place, with particular regard to rapidly identifying technical solutions at a glance.

The 'Nine Modules of Automation' catalogue is not intended to be a comprehensive representation of our product range. Everywhere you will find references and links to our Internet pages which, in the event of any doubt, display the latest information.

At this juncture, we would like to refer you to our TÜNKERS App which, in the new version available for Android and iPhones, not only contains technical information but can also assist you in selecting the most suitable product.

However, even in the era of the Internet, personal contact is still very important to us. Do not hesitate to contact us directly at 02102/4517-0.

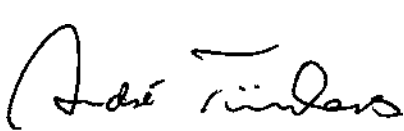

André Tüнкers



Josef-Gerhard Tüнкers




Olaf Tüнкers



Content

CLAMPING



1-1

Mini Clamps



1-7

Pneumatic Grippers



1-21

Parallel Grippers



1-33

Standard Clamps



1-37

Electric Clamps



1-49

Pin Clamps



1-53

Swivel Units



1-63

Manual Clamps



1-71

Locating Pin Unit



1-86

POSITIONING



2-1

Swivel Units



2-5

Linear Units



2-17

Linear Cylinders



2-27

Rotary Units



2-43

Lifters



2-49

GRIPPING



3-1

TÜNKERS Round Tube System (TRR)



3-7

TÜNKERS Carbon Fibre Tube System (TCR)



3-11

TÜNKERS One Screw System (TOS)



3-17

Euro-Gripper-Tooling System (EGT)



3-23

TÜNKERS Machine Tools for Gripping, Clamping and Positioning



3-28

Special Products



3-29

Services



3-30

FORMING



4-1

Punching



4-7

Stamping



4-13

Joining



4-21

Specialities



4-29

Power Press Technology



4-33

Fixtures



4-69

WELDING



5-1

Weld Clamps



5-6

Robot Weld Guns



5-10

Manual Weld Guns



5-14

Special Weld Guns



5-16

Weld Machines



5-17

Press-Welder Fixtures



5-18

DOSING



6-1

Doser



6-4

Controller



6-5

Pump Stands



6-7

Applicator Heads



6-8

All-electric Dosing Installation



6-9

TÜNKERS Condition Monitoring



6-10

ApplicationMaster Modular Concept



6-11

ROTATING



7-1

Rotary Index Tables



7-5

Simplex Rotary Tables



7-13

Compact Rotary Tables



7-19

Parallel Shaft Index Drive



7-27


Manual Rotary Tables



7-31

Content

CONVEYING



8-1

Accumulating Conveyors



8-5

Indexing Conveyors



8-21

Transfer System



8-29

Belt Conveyors



8-33

Gravity Conveyors



8-39

Heavy-Duty Roller Conveyors



8-41

Container Systems



8-43

Conveying Systems



8-49

TRANSPORTING



9-1

Lift Powered Rollerbed



9-4

Lift and Shift System



9-7

Dual Box Lifter



9-8

Mono- / Duorail Shuttle



9-9

Lift and Rotate Unit



9-10

Skid Conveyor



9-11

Level Lifter



9-12

7th Axis





9-13

Tool Changing System



9-14

CLAMPING

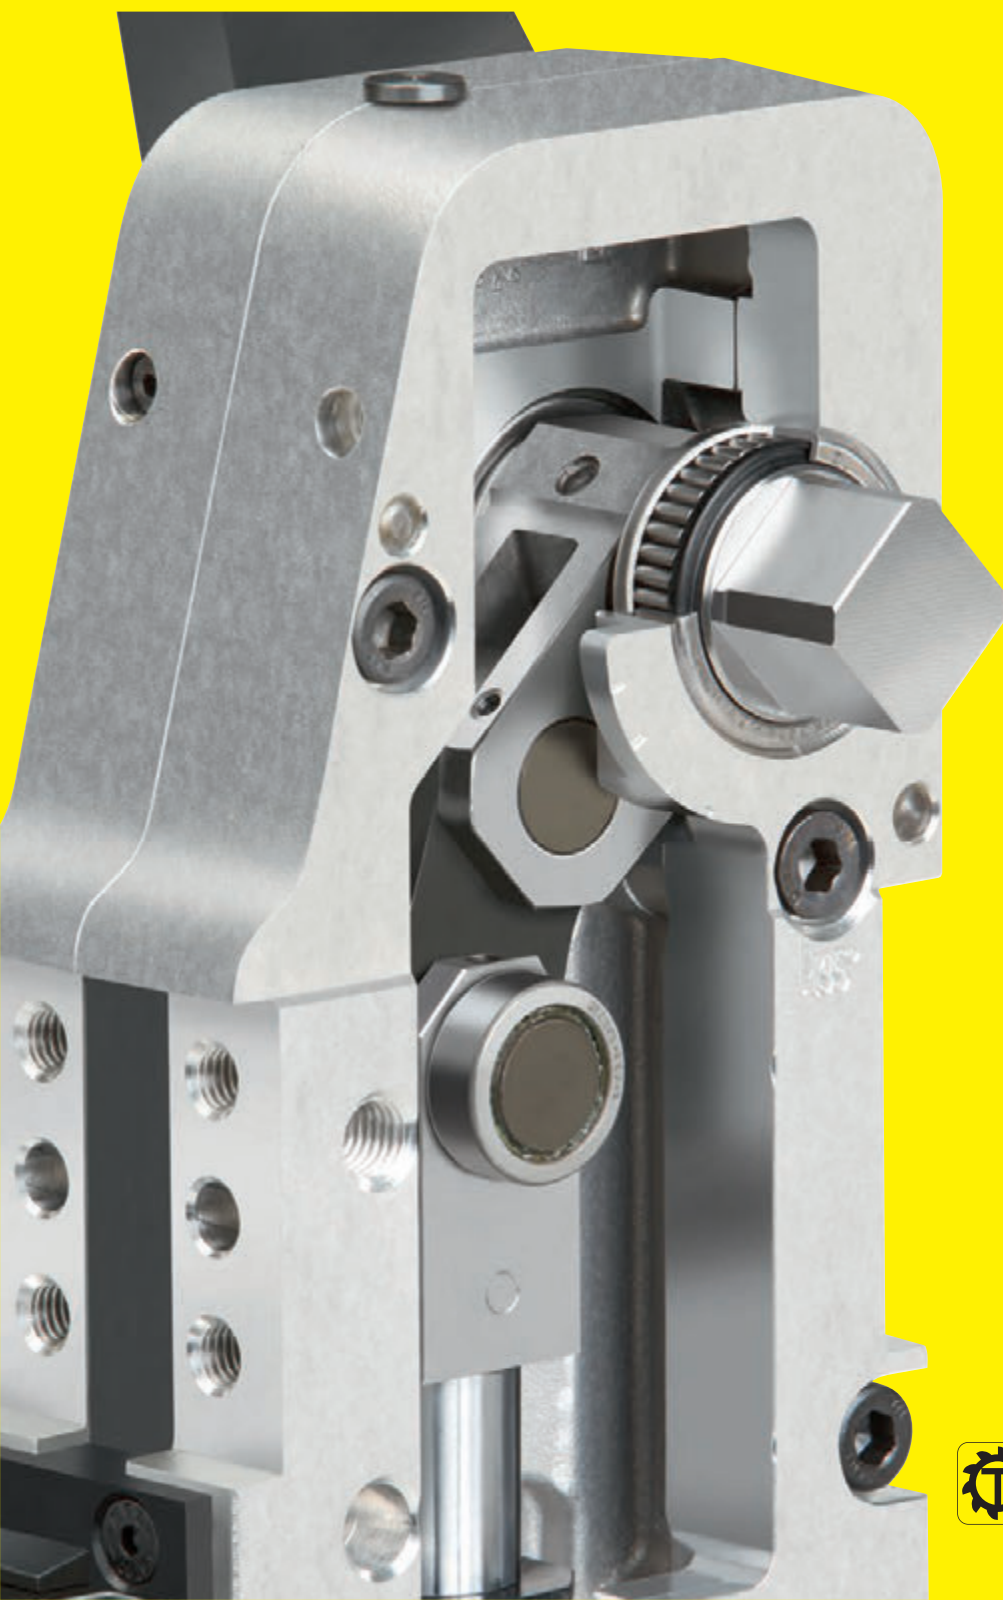

TÜNKERS®
Ingenuity in series.



For more than 40 years, clamping technology has formed the basis of the TÜNKERS Automation Programme, which now encompasses 9 modules. Indeed, professional clamping and positioning of the workpiece is still one of the first stages in the automation of a production system.

For decades, TÜNKERS has followed the standards for clamping solutions in car body assembly. From the introduction of the slim clamp, the position sensing cassette and the Alpha curve-driven clamp to the present day, with the introduction of the multi-purpose clamp and an integrated electrical application, TÜNKERS is setting the standards for clamping solutions in body frame automation.

With our company slogan '**Every day a new idea – every week a new product**', we regard ourselves as your innovative companion for all your clamping requirements.

This catalogue will provide you with an overview of our current product range.

Mini Clamps _____		1-7
Pneumatic Grippers _____		1-21
Parallel Grippers _____		1-33
Standard Clamps _____		1-37
Electric Clamps _____		1-49
Pin Clamps _____		1-53
Swivel Units _____		1-63
Manual Clamps _____		1-71
Locating Pin Unit _____		1-86





What you should know about clamping

The purpose of clamping tools is to securely hold the workpiece in position without obstructing the production process. High clamping forces combined with compact dimensions are therefore the most important requirements for a clamping tool. For this reason, clamps are also equipped with mechanical transmission gear units.

Transmission principle (force intensifier)



Knee-lever principle

The pneumatic cylinder powers the clamp arm by means of a knee-lever mechanism. Depending on the configuration of the mechanism, this is locked in the end position.

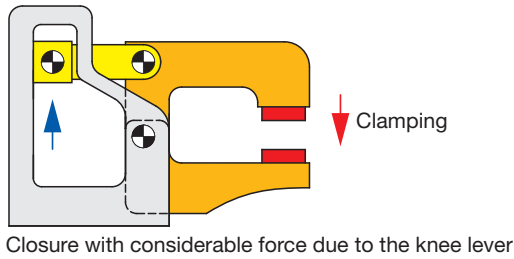

Curved wedge principle


The pneumatic cylinder activates the gripper arm via a gate-shaped curve which, in the end position, is so slim that an intensified force of approx. 1:8 is achieved.

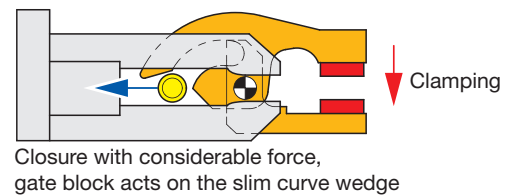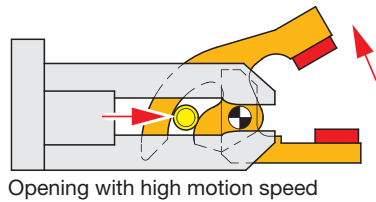

Clamping force is not the same as holding force

Clamping force signifies the force applied to the workpiece by the drive mechanism via the clamp arm during gripping or clamping operations.



Holding force, on the other hand, denotes the maximum force, after locking the knee-lever (over-centre position), that can be applied by the workpiece on the gripper/clamp arm without destroying the mechanism. Therefore, particular attention must be paid to the maximum holding force when, for example during the production process (welding, bonding), there is a possibility of distortion of the component or if the clamp arm is used as a fixed stop. If the holding force specified in the technical details is exceeded, this will inevitably result in destruction of the mechanism, the clamp arm or the bearing position.

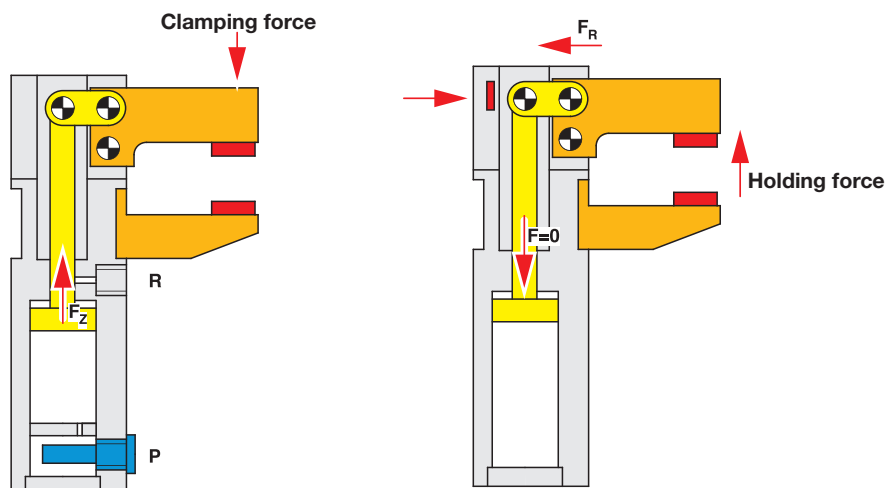

Safety function

As standard, every TÜNKERS knee-lever system is equipped with an **over-centre function**, which retains the gripper or clamp in the closed position, even in the event of a loss of pressure. For all other products, as an option we can supply a **non-return valve** that, in the event of a loss of pressure, uses the air trapped in the cylinder to safeguard the end position.

If the production line is shut down or in the event of a sudden loss of pressure, this ensures that the workpiece remains in the working position.

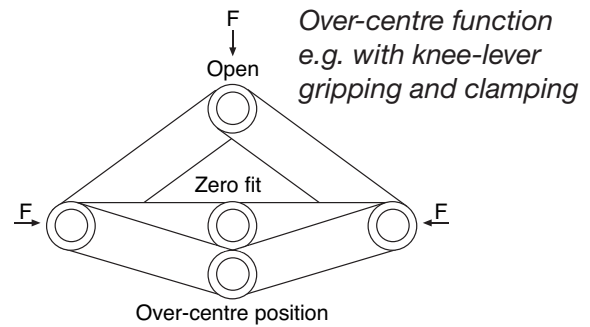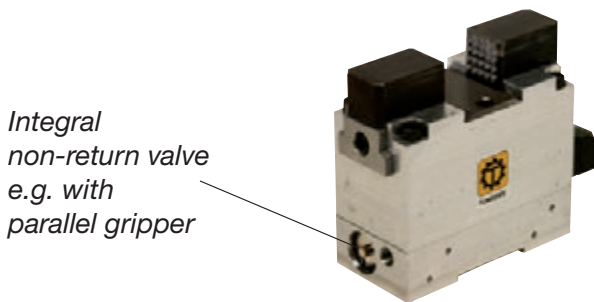


Position sensing technology

The end position sensing feature, supplied as an option for all TÜNKERS products, indicates the position (closed or open) to the central control unit/PLC. With the integral LED for clamping and position control, maintenance personnel are also able to directly view the operating status of the gripper, enabling them to react swiftly to any malfunctions.




Position sensing cassette fitted to a knee-lever clamp

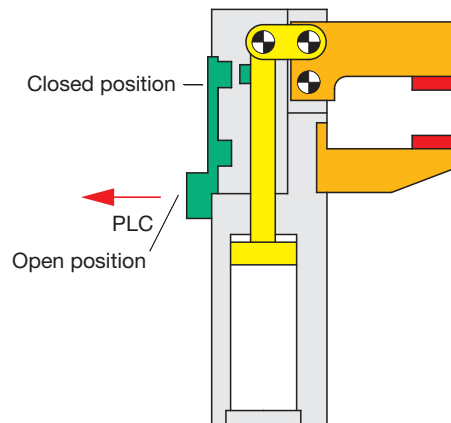

Valves and pneumatic control system


Every TÜNKERS pneumatic tool is designed to function at an operating pressure of between 5 and 6 bar and up to a maximum of 8 bar. This is controlled by five conventional 2-way valves.

During clamping with manual feed, we recommend the use of 5/3-way valves, as the gripper or clamp can only be operated manually in the closed position with the valve in the central, vented position.



CLAMPING

Mini Clamps






Mini Clamps

The smallest examples of our tool technology using the knee-lever principle are the mini clamps, which are specially designed for the clamping and gripping requirements of smaller to medium-sized components. They are mainly characterised by their compact size and low weight, distinctive features of these professional tools. This has been made possible by the design of the housing in monoblock construction. With this exceptionally compact form of construction, all the mechanical and pneumatic components, including the drive cylinder, the knee-lever mechanism and the clamp arm bearings, are housed in a high-strength aluminum housing. As an option, the miniature series of clamps can be supplied with magnetically-operated limit switches. The mini clamps feature cylinder sizes of 16 to 40 mm for clamping force levels up to approx. 800 N.




Typical applications

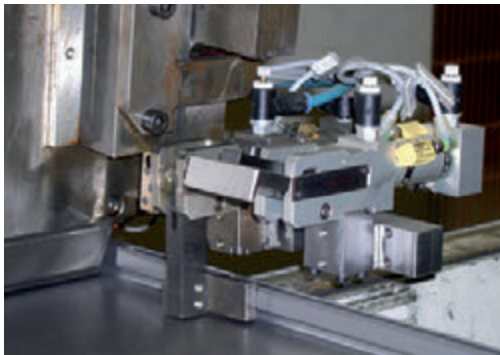

PKS 25 pneumatic clamp used as a component end stop in a welding fixture – domestic appliance manufacture




PKSG 20 in threaded form for clamping an aluminum component during the chip removal process

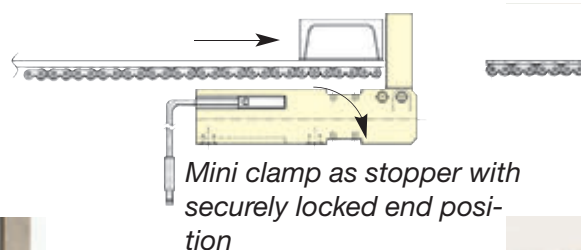


Mini clamp as stopper with securely locked end position



Securing printed circuit boards

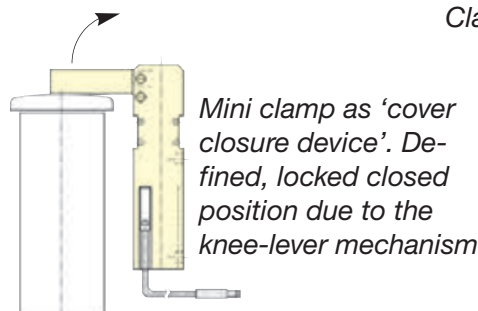

Mini clamp as 'cover closure device'. Defined, locked closed position due to the knee-lever mechanism

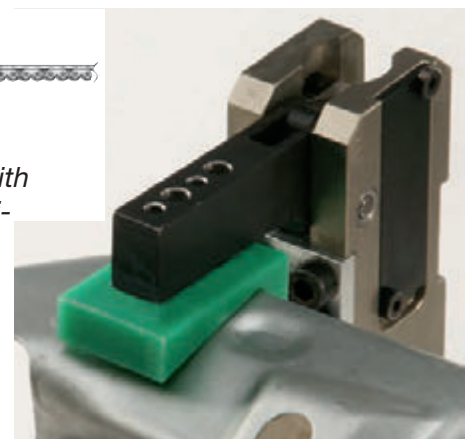


Clamping sheet metal components

Order Code

	PKS	20.1	N	D	ZL	A17	T03	90°
Model: _____								
– PKS Standard (pneumatic knee-lever clamp)								
– K-enclosed Model								
Frame size/cylinder diameter: _____								
16, 20, 25 mm								
Type of locking mechanism: _____								
– Standard with locking mechanism								
N – Without locking mechanism / with adjustment function								
Safety function: _____								
– Standard, without safety function								
D – Dual force/safety function, size: 25mm dia.								
Hand feed: _____								
– None								
ZL – Lever left								
ZR – Lever right								
Armvariants: _____								
A00 – Without drillings, standard								
A17 – With elongated hole, e.g. for set-screws								
A18 – With normal drilling pattern, e.g. for contour blocks								
A19 – With drilling and keyway, e.g. for clamping jaws								
Position sensing: _____								
T03 – Prepared for magnetic switches								
T12 – With inductive position sensing cassette, size 25 mm dia.								
T23 – With magnetic switch								
Opening angles: _____								
45°, 60°, 75°, 90°, 96°, 105°								



Mini Clamp PKS 16-25.1

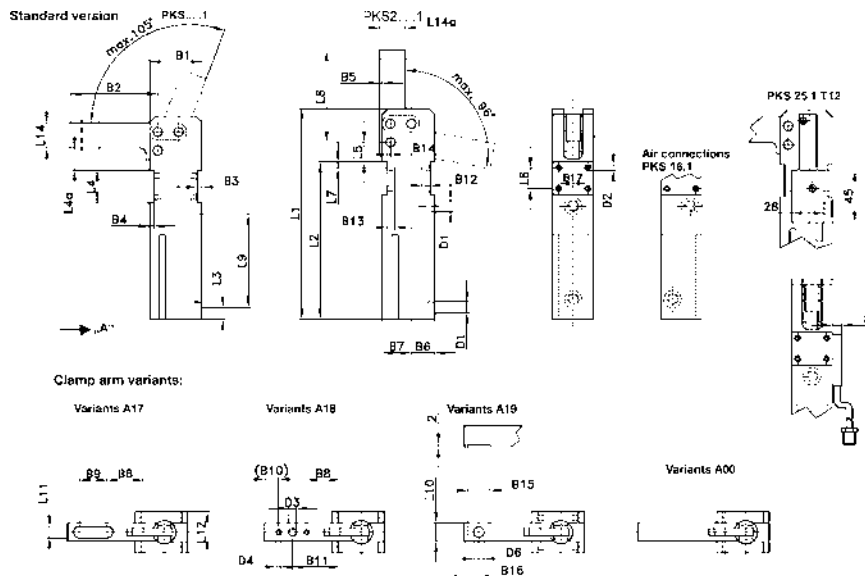

- Compact clamp with knee-lever mechanism
- Over-centre locking
- Monoblock housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 16 to 25 mm
- Clamp arm with mounting for gripper jaws, contour blocks or clamping screws
- Mounting hole patterns front and rear
- Versions: Standard, circular shaped, threaded stem, cartridge variants
- Prepared with magnetic pistons for position sensing system

Optional:

- Position sensing for closed and open positions

Ordering example:

PKS 20.1 A17 T03 90°
 ↳ Opening angle
 ↳ Position sensing system
 ↳ Clamp arm variants
 ↳ Piston Ø
 ↳ Type

Order code, TÜNKERS position sensing system:

- ...T03 Magnet sensor (standard), prepared for Position sensing system
- ...T12 Inductive sensing (PKS 25-1 only)
- ...T23 Magnetic sensing, incl. 2 magnetic switches mounted on the clamp

Opening angle, available in variants 45°, 60°, 75°, 90°, 96° und 105°.

Type	Clamping torque at 5 bar (Nm)	Max. holding torque (Nm)	Operating pressure with oil-free air (bar)	Maximum pressure with oil-free air (bar)	Mounting (G)	Opening and closing time (approx. sec.)	Weight (kg)
PKS 16.1	8	25	5	6	M5	1	0,3
PKS 20.1	15	54	5	6	G1/8	1	0,5
PKS 25.1	25	75	5	6	G1/8	1	0,8

Type	L1	L2	L3	L4	L4a	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	B1	B2	B3	B4
PKS 16.1	123	96	12	20	7,5	7,5	10	5	50	57	10	5,5	26	16	15	61	39	5,5	16,5	32	50	2,5	2,5
PKS 20.1	158	120	15	25	15	14	15	5	60	69	12	6,5	30	20	18	83	50	11	22	39	60	3	3
PKS 25.1	182	136	17,5	28	19	17	18	5	75	80	16	8,5	35	25	22	95	61	12	22	45	75	4	4

Type	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14	B15	B16	B17	D1	D2	D3	D4	D5	D5a	D6
PKS 16.1	2	14	18	28	16	6	36	5	7	3,5	12	9	16	M5	M5	5,5	4	25	M25x1,5	6,5
PKS 20.1	3	17	22	32	20	8	42	6	8	4	12	9	20	G1/8	M5	6,5	5	30	M30x1,5	6,5
PKS 25.1	4	20	25	40	25	10	52,5	6	8	3	12	9	25	G1/8	M5	8,5	6	34	M35x1,5	6,5



Subject to technical modifications.



- Compact clamp, special design with manual feed
- Manual closing and locking
- Pneumatic opening and closing

Please Note:

A 5/3-way valve, central position, vented, is required.

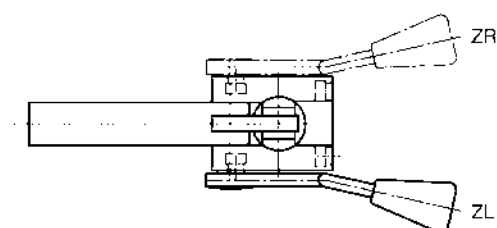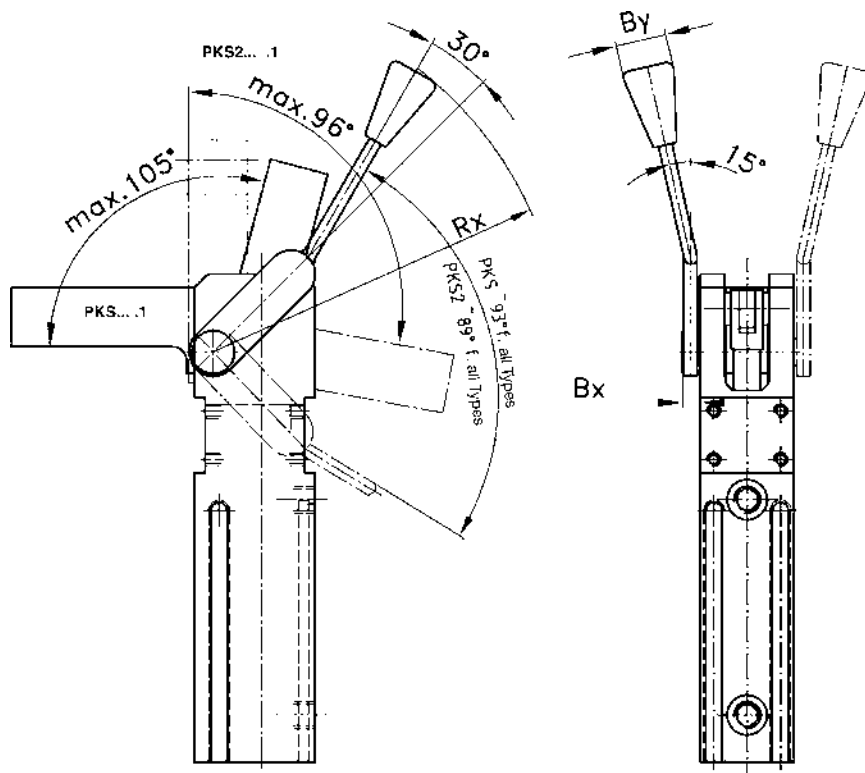

All other dimensions identical to the PKS Standard Series.

Type	Bx	By	Rx	Weight (kg)
PKS 16.1 Z	9	20	135	0,32
PKS 20.1 Z	9	20	135	0,70
PKS 25.1 Z	9	20	135	0,928

Subject to technical modifications.




Mini Clamp PKG 16-25

- Compact clamp with knee-lever mechanism for horizontal assembly
- Assembly compatible with conventional manual clamps, e.g. T Series
- Over-centre locking
- Monoblock housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 16 to 25 mm
- Clamp arm with mounting for gripper jaws, contour blocks or clamping screws
- Mounting hole patterns front and rear

Optional:

- Position sensing for closed and open positions

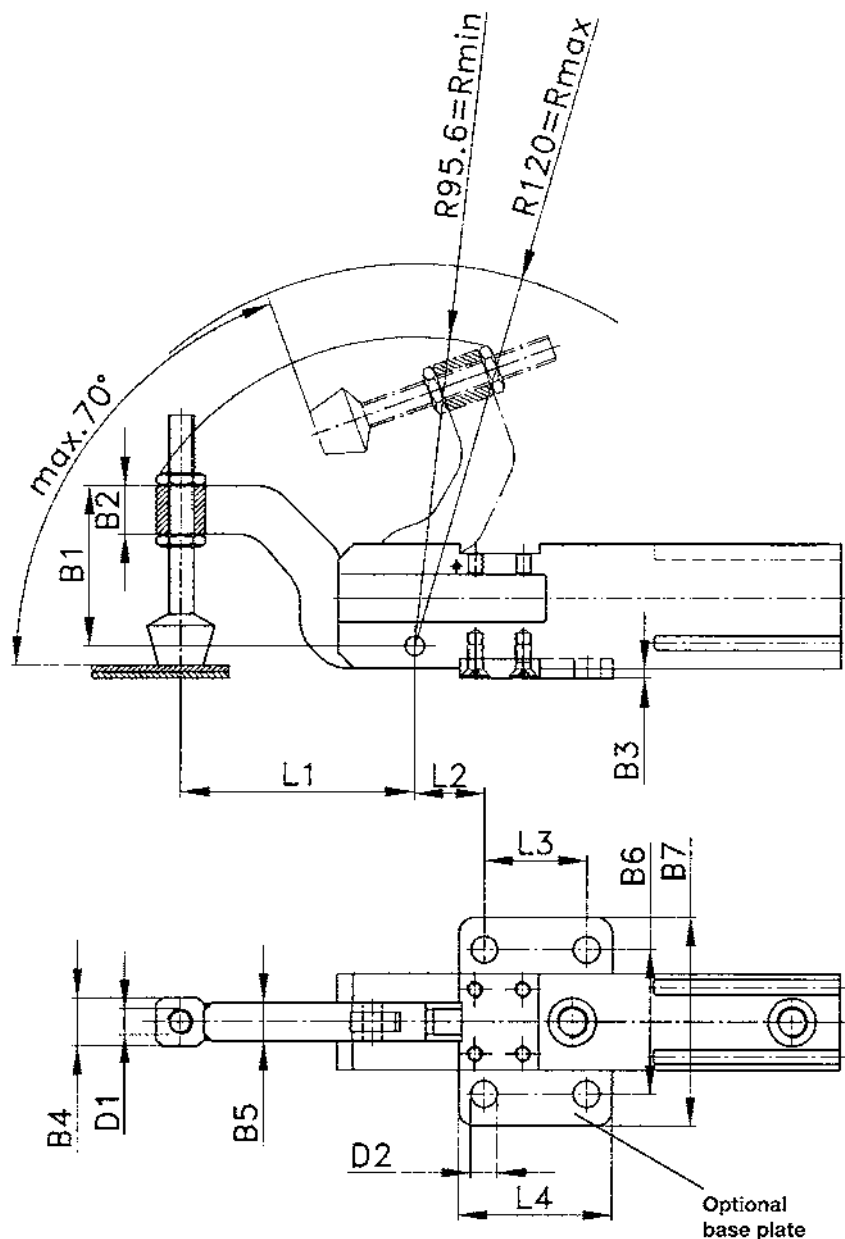

Ordering example:

PKG 20 A17 GP T03 45°
 ↳ Type ↳ Piston Ø ↳ Clamp arm variants ↳ Option: Base plate ↳ Position sensing system ↳ Opening angle

Order code, TÜNKERS position sensing system:

...T03 magnet sensing, prepared for position sensing system
 ...T23 magnet sensing, incl. 2 magnetic switches


Optional: Magnetic switch Type 'AFS T03' (2-off) must be ordered separately and do not form part of the scope of delivery!

Opening angle:
 Available in variants 45°, 60°, 70°.

Type	Clamping torque at 5 bar (Nm)	Max. holding torque (Nm)	Operating pressure with oil-free air (bar)	Maximum pressure with oil-free air (bar)	Mounting (G)	Opening and closing time (approx. sec.)	Weight (kg)
PKG 16.1	8	25	5	6	M5	1	0,3
PKG 20.1	15	54	5	6	G1/8	1	0,5
PKG 25.1	25	75	5	6	G1/8	1	0,8

Type	L1	L2	L3	L4 +0,1	B1	B2	B3	B4	B5	B6	B7	D1	D2 dia.
PKG 16.1	50	16	32	48	33	12	3	12	10	45	65	M6	5
PKG 20.1	73	22	32	48	50	15	3	15	12	45	65	M8	8,3
PKG 25.1	80	26,5	45	64	52	12	4	16	16	50	70	M8	8,5

Subject to technical modifications.

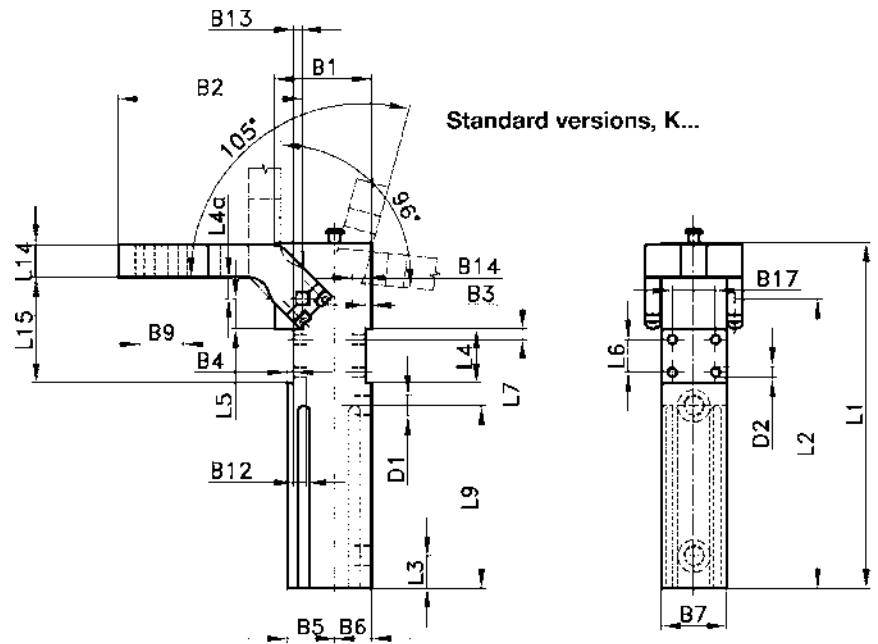

Standard versions, K...

- Compact clamp with knee-lever mechanism
- Over-centre locking
- Fully enclosed mechanism
- Monoblock housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 16 to 25 mm
- Fork-type clamp arm with mounting for gripper jaws, contour blocks or clamping screws
- Mounting hole patterns front and rear
- Version: Standard

Optional:

- Position sensing for closed and open positions

Ordering example:

K 20.1 A17 T03 105°
 ↓
 Type
 ↓
 Piston Ø
 ↓
 Clamp arm variants
 ↓
 Position sensing system
 ↓
 Opening angle

Order code, TUNKERS position sensing system:

...T03 Magnet sensor (standard), prepared for Position sensing system
 ...T23 magnet sensing, incl. 2 magnetic switches

Optional: Type 'AFS T03' – must be ordered separately (2-off).

Opening angle, available in variants 45°, 60°, 75°, 90°, 96° und 105°.

Type	Clamping torque at 5 bar (Nm)	Max. holding torque (Nm)	Operating pressure with oil-free air (bar)	Maximum pressure with oil-free air (bar)	Mounting (G)	Opening and closing time (approx. sec.)	Weight (kg)
K 16.1	8	25	5	6	M5	1	0,40
K 20.1	15	54	5	6	G1/8	1	0,60
K 25.1	25	75	5	6	G1/8	1	0,90

Type	L1	L2	L3	L4	L4a	L5	L6	L7	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	L19	B1	B2	B3	B4
K 16.1	126	103,5	12	20	10	7,5	10	5	69	10	5,5	40	26	15	37,5	61	5,5	16,5	39	38	62	2,5	2,5
K 20.1	159,5	133,5	15	25	10	14	15	5	84	12	6,5	45	30	18	49	83	11	22	50	45,5	76	3	3
K 25.1	185	152,5	17,5	28	10	17	18	5	80	16	8,5	52	35	20	55	95	12	22	61	52	93	4	4



Type	B5	B5	B7	B8	B9	B10	B11	B12	B13	B14	B15	B16	B17	D1	D2	D3	D3a	D4	D5	D6
K 16.1	18	14	26	40	16	6	48	7	3,5	5	12	9	16	M5	M5	25	M25x1,5	4	5,5	6,5
K 20.1	22	17	30	50	20	6	60	8	4	6	12	9	20	G1/8	M5	30	M30x1,5	5	6,5	6,5
K 25.1	25	20	35	60	25	8	72,5	6	3	8	12	9	25	G1/8	M5	34	M35x1,5	6	8,5	6,5

Subject to technical modifications.



Mini Clamp K 16-25.1 Z


CLAMPING

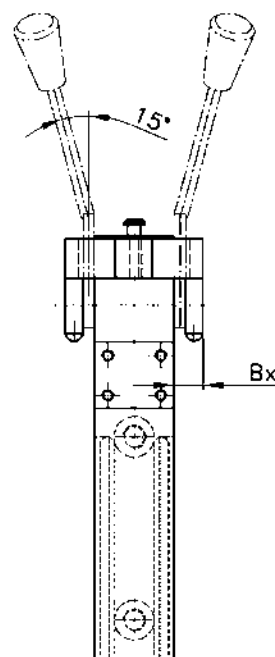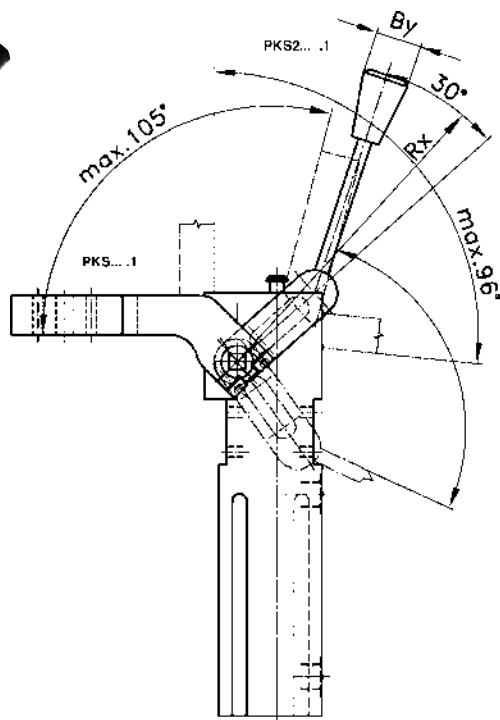

- Compact clamp in special configuration, with manual feed
- Manual closing and locking
- Pneumatic opening and closing

Please Note:

A 5/3-way valve, central position, vented, is required.

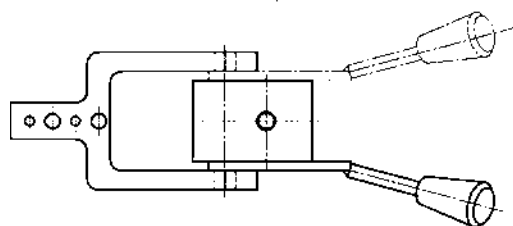

All other dimensions identical to the K Standard Series.

Type	Bx	By	Rx	Weight (kg)
K 16.1 Z	12,5	20	135	0,45
K 20.1 Z	12,5	20	135	0,80
K 25.1 Z	12,5	20	135	1,02

Subject to technical modifications.



- | 1 - 15**



Pneumatic Clamp K 40.1 BR2


CLAMPING



- Compact clamp with knee-lever mechanism
- Over-centre locking
- Monoblock housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 40 mm
- Clamp arm with mounting for gripper jaws, contour blocks or clamping screws
- Mounting hole patterns front and rear
- Version: Standard

Optional:

- Position sensing for closed and open positions

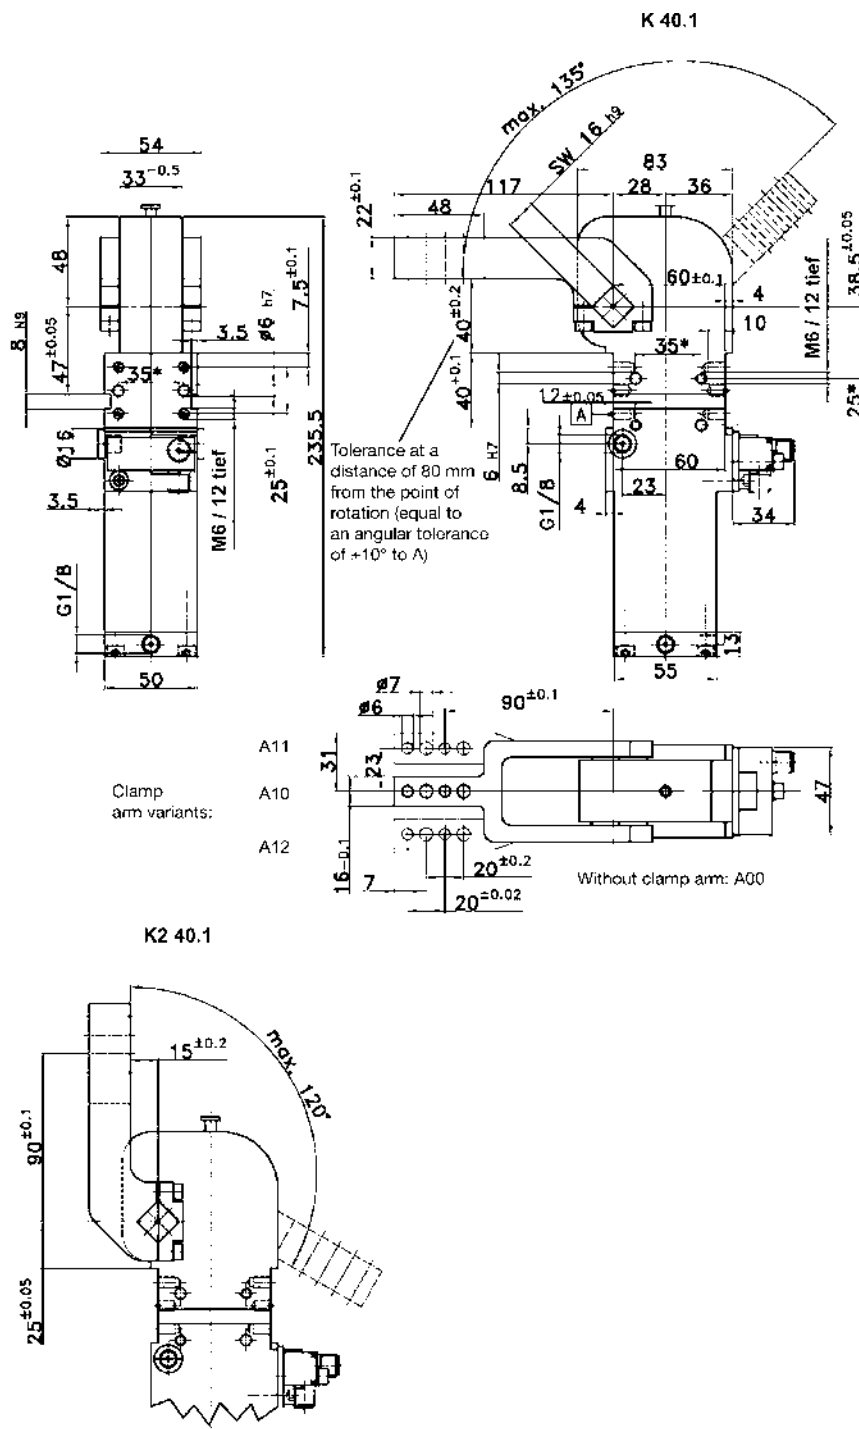

Ordering example:

K 40.1 BR2 A10 T12 135°
 ↳ Type ↳ Piston Ø ↳ Clamp arm variants ↳ Position sensing system ↳ Opening angle

Order code, TÜNKERS position sensing system:

...T00 without position sensing system
 ...T12 24 V inductive position sensing,
 1 output with integral LEDs 4-pole

Standard opening angle: K-135°, K2-120°
 Special opening angle: available between 45° and 105° in 15° increments.

Type	Clamping torque at 5 bar (Nm)	Max. holding torque (Nm)	Ø Piston	Weight ~ (kg)
K 40.1 BR2	120	360	40	2


Subject to technical modifications.




- Compact clamp with knee-lever mechanism
- Over-centre locking
- Monoblock housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 40 mm
- Clamp arm with mounting for gripper jaws, contour blocks or clamping screws
- Mounting hole patterns front and rear
- Version: Standard
- Manual feed

Optional:

- Position sensing for closed and open positions

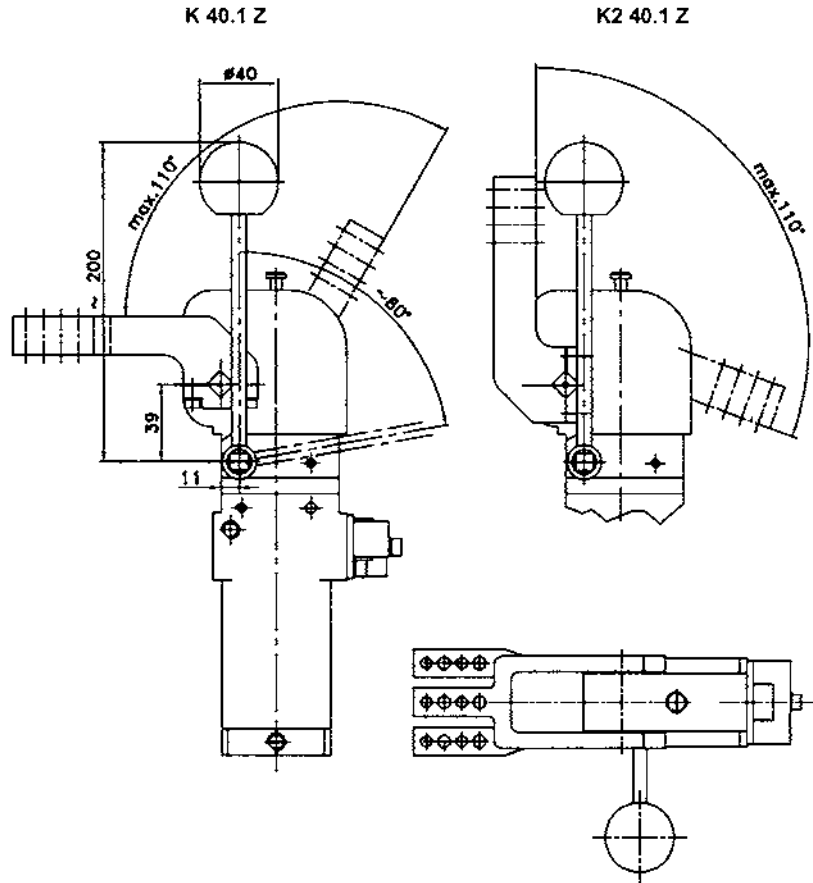

Hand lever supplied unattached

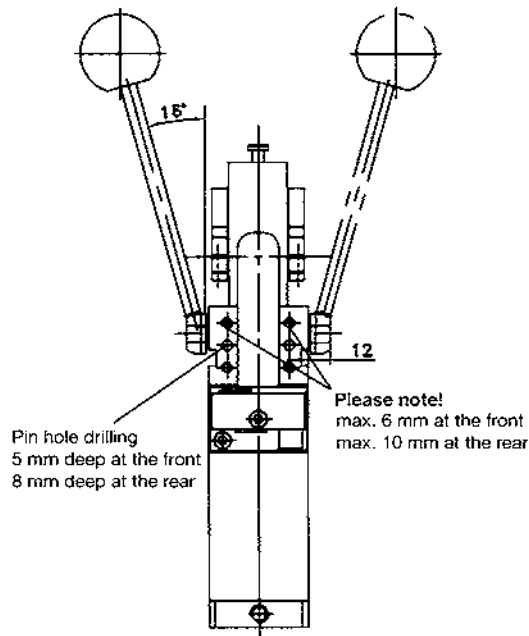

Position sensing systems

...T00 without position sensing system

...T12 Inductive sensing 24V, 1 output with integral LED's

Ordering example:

K 40.1 BR2 Z A10 T12 135°
 ↓ Opening angle
 ↓ Position sensing system
 ↓ Clamp arm variants
 ↓ Manual feed
 ↓ Piston Ø
 ↓ Type

Subject to technical modifications.



Pneumatic Clamp V/V2 40 BR2


CLAMPING



- Compact clamp with knee-lever mechanism
- Over-centre locking
- Monoblock housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 40 mm
- Clamp arm with mounting for gripper jaws, contour blocks or clamping screws
- Mounting hole patterns front and rear
- Version: Standard
- Infinitely adjustable opening angle

Optional:

- Position sensing for closed and open positions

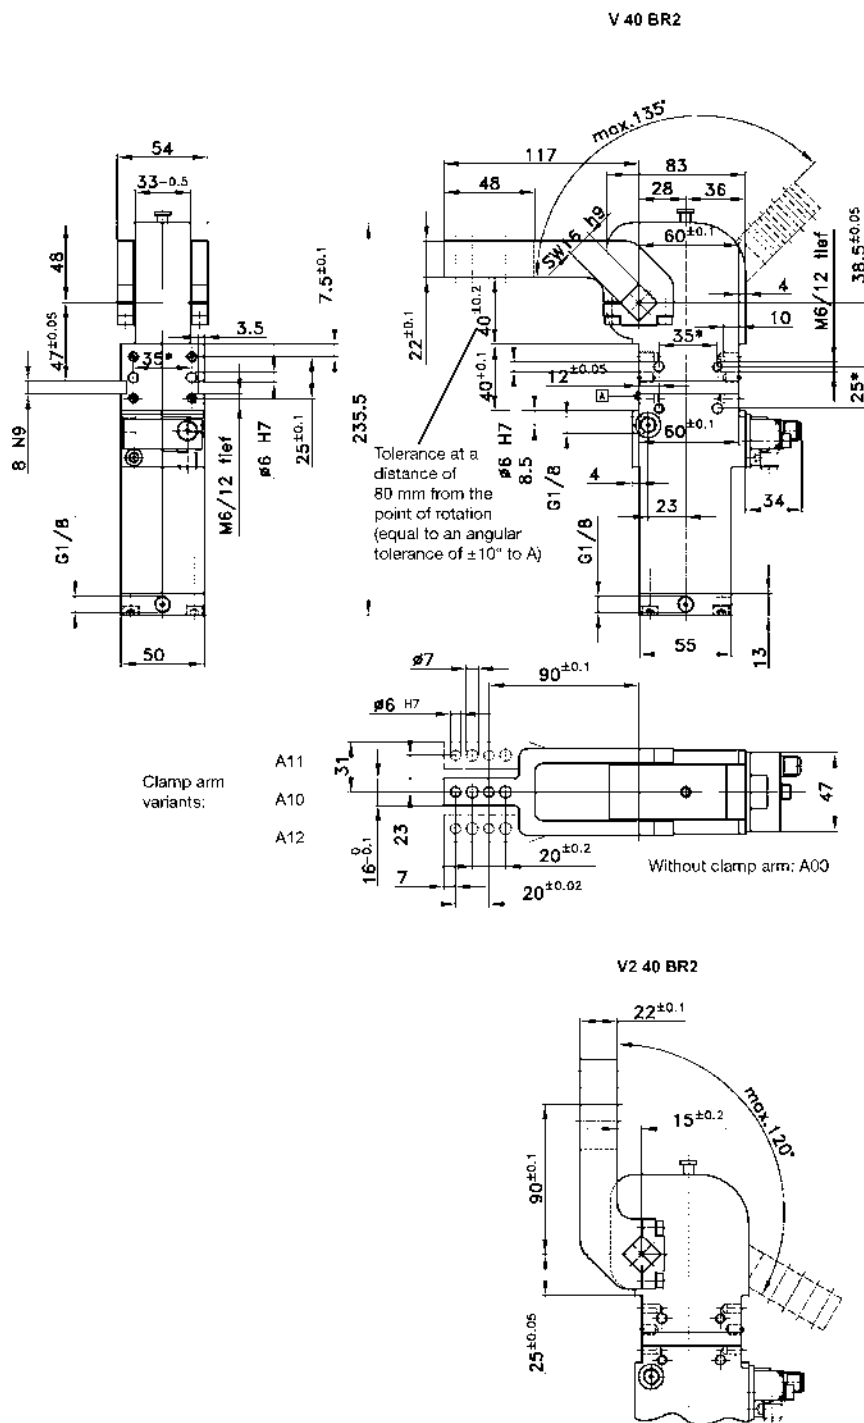

Ordering example:

V 40 BR2 A10 T12 135°
 ↓ Opening angle
 ↓ Position sensing system
 ↓ Clamp arm variants
 ↓ Piston Ø
 ↓ Type

Type	Clamping torque at 5 bar (Nm)	Max. holding torque (Nm)	Ø Piston	Weight ~ (kg)
V/V2 40 BR2	120	380	40	2,2


Subject to technical modifications.



- Compact clamp with knee-lever mechanism
- Over-centre locking
- Monoblock housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 40 mm
- Clamp arm with mounting for gripper jaws, contour blocks or clamping screws
- Mounting hole patterns front and rear
- Version: Standard
- Manual feed
- Infinitely adjustable opening angle

Optional:

- Position sensing for closed and open positions

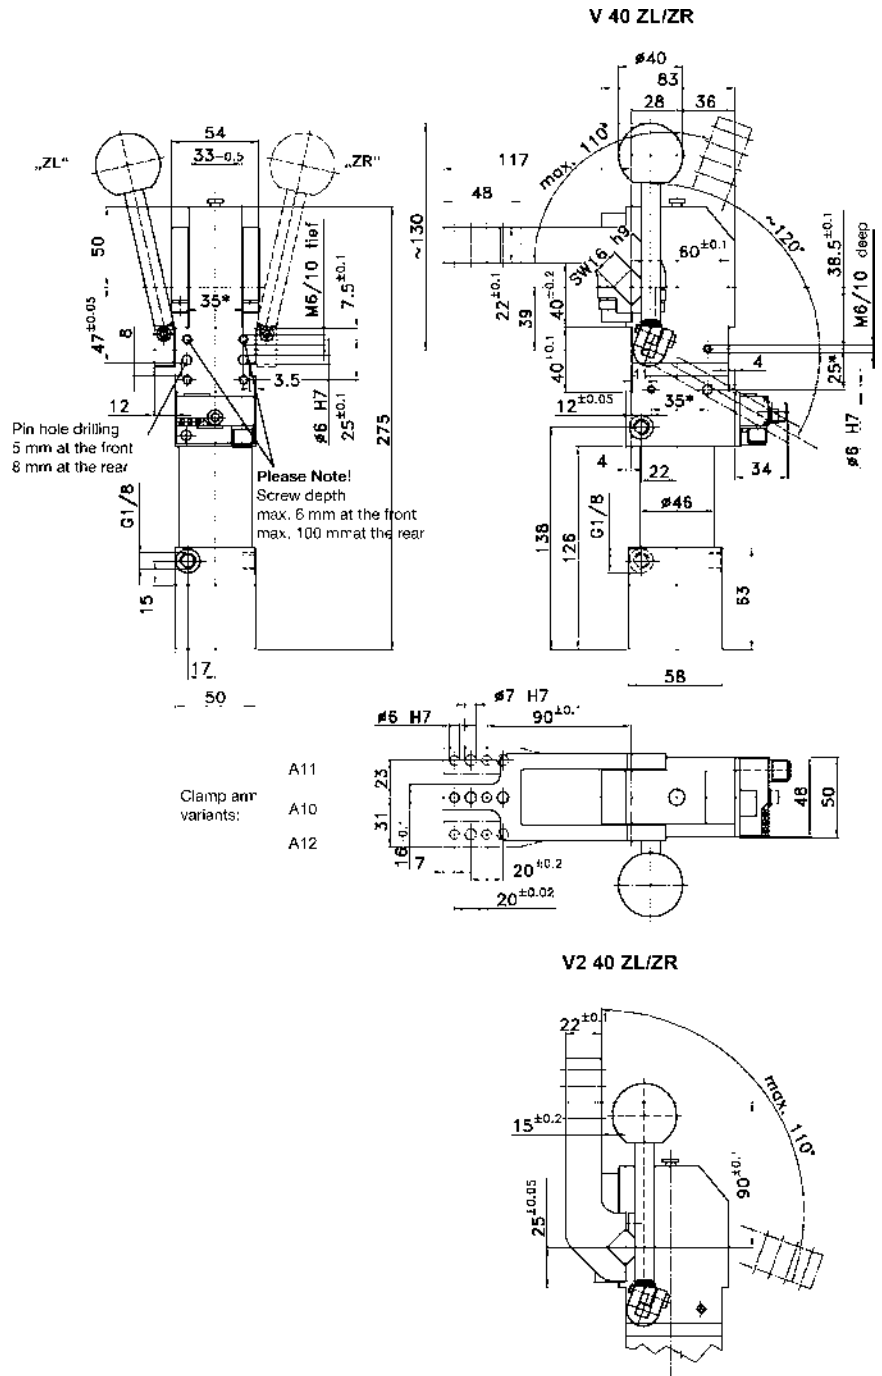

Position sensing systems

...T00 without position sensing system

...T12 Inductive sensing 24V, 1 output with integral LED's

Ordering example:

V 40 ZL A10 T12 115°

↓ Opening angle

↓ Position sensing system

↓ Clamp arm variants

↓ Manual feed left (ZR = right)


↓ Piston Ø

↓ Type

Subject to technical modifications.

CLAMPING

Pneumatic Grippers





Pneumatic Grippers


Pneumatically-operated grippers are the tools of choice for manual handling operations. Typical applications include robot-controlled gripper systems which transfer the workpiece from one preliminary process to another workstation. Due to short cycle times with dynamic movements pneumatic grippers must be light.

Based on the operating principle of the mechanism, there are two different types of gripper – the so-called knee-lever gripper and the curve-driven lever gripper.


Pneumatic grippers with knee-lever mechanism

Knee-lever grippers are compact tools in which a pneumatic cylinder moves the gripper arms by means of a knee-lever mechanism. In addition to the high level of powergear ratio (8 to 10 times), the over-centre locking feature of the mechanism ensures secure immobilisation of the workpiece, even in the event of a loss of pressure. For this reason, knee-lever grippers are ideally suited for use in systems that are subject to potential personal injury (emergency stop, for example).

The mechanical and pneumatic components installed in the fully-enclosed housing are resistant to dirt caused by the production process, such as welding operations. Thus, even in harsh working conditions, TÜNKERS knee-lever grippers feature high levels of availability. The gripper arms, with opening angles up to 90°, allow easy removal of the workpiece.



Design principle

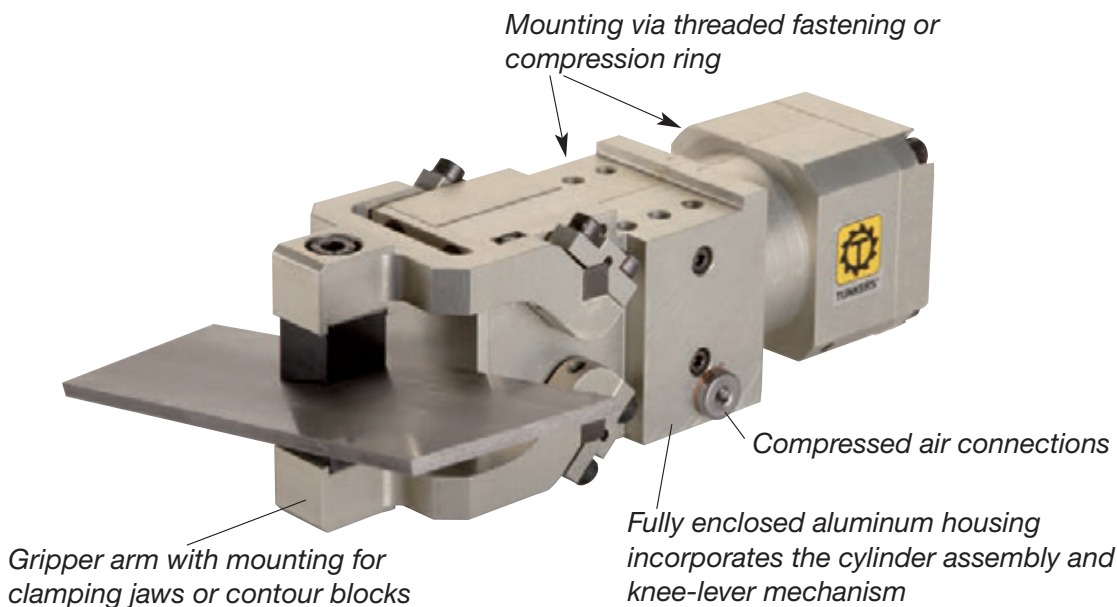

Pneumatic grippers with curve-driven lever mechanism

Using the clamping wedge principle, curve-driven grippers convert the driving force of the pneumatic cylinder into a high clamping force. The advantage of this type of mechanism is a very simple and robust basic structure which, in long-term use, is characterised by extremely short cycle times. The integration of cylinder and mechanism in one housing facilitates the manufacture of highly compact and weight-optimised tools. For this reason, TÜNKERS curve-driven grippers are ideally suited for production processes in which weight, size and short opening and closing times are decisive factors.

Typical applications for curve-driven grippers include transport and handling tasks, as in car body manufacture, in press sequencing, general logistics and fixture construction.

Design principle





Pneumatic Grippers


CLAMPING

Product range

						
Type	APG 40.1	APG 40.1 AS	GN 32	GN 32 AS	GN 40	GN 40 AS
Clamping force (N)	1200	1300	600	400	1000	600
Max. opening angle	80°	2 x 85°	50°	2 x 80°	50°	2 x 80°
Weight (kg)	1,6	2,0	1,3	1,1	2,0	1,8
Dimensions (mm)	212x60x65	109x63x60	139x50x50	139x50x50	165x55x55	165x55x55


				
Type	PG 32	PG 40	PG 32 AS	PG 40 AS
Clamping force (N)	900	1300	900	1300
Opening angle	75°	75°	2 x 75°	2 x 75°
Weight (kg)	0,87	1,5	0,91	1,55
Dimensions (mm)	158x45x45	198x55x55	158x45x45	198x55x55

Pneumatic Gripper APG 40.1 BR2 A10/A20

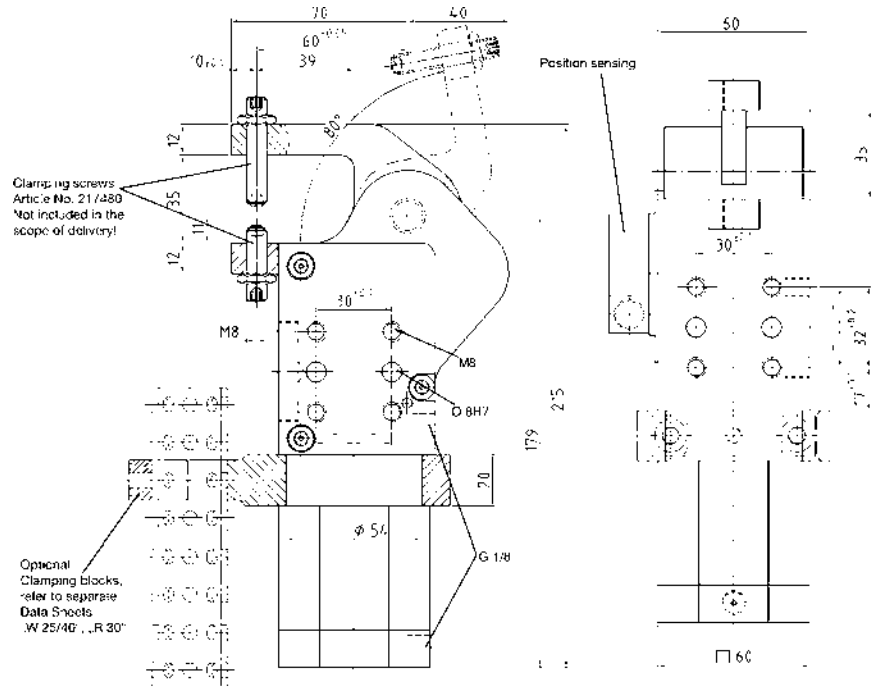

- Compact gripper with knee-lever mechanism
- Over-centre locking
- Fully-enclosed mechanism
- Monoblock housing made from high-strength aluminum material
- Integrated pneumatic cylinder, Ø 40 mm
- One powered clamp arm with mounting for gripper jaws, contour blocks or clamping screws
- Mounting hole pattern at the front, alternative mounting with shaft-clamping bush
- No clamping delay by virtue of clamping on the axis of rotation

Optional:
Integrated position sensing for closed and open position

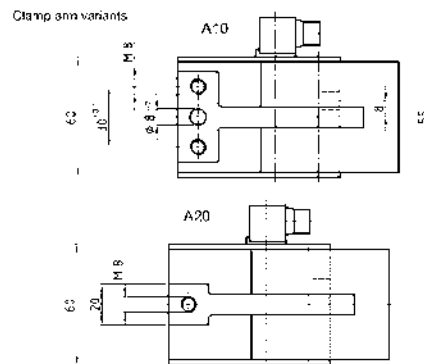

Ordering example:

APG 40.1 A10 T12 45°

→ Type

→ Arm variants

→ Position sensing system

→ Opening angle

→ Piston Ø

Order code TUNKERS

Position sensing:

...T00 without position sensing
...T12 24 V inductive position sensing,
1 output with integral LEDs

Opening angle:

Supplied in 80° configuration. Other variants on request



Type	Clamping force at 5 bar (N)	Operating pressure with oil-free air (bar)	Maximum pressure with oil-free air (bar)	Mounting (G)	Opening and closing time (approx. sec.)	Weight (kg)
APG 40.1	1200	5	6	1/8	1	1,6

Subject to technical modifications.



Pneumatic Gripper APG 40.1 BR2 AS

CLAMPING

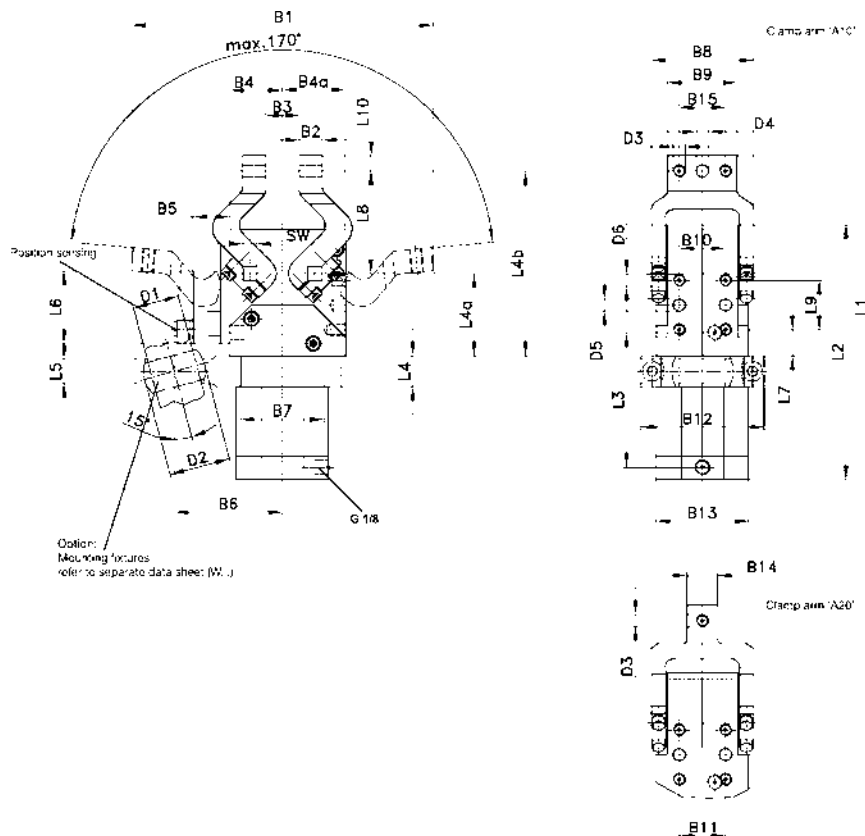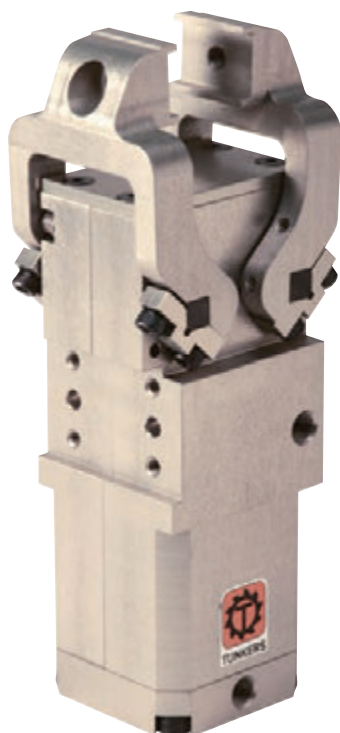

- Compact gripper with knee lever mechanism
- Over-centre locking
- Fully-enclosed mechanism
- Monoblock housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 40 mm
- Two synchronously-driven clamp arms with mounting for gripper jaws, contour blocks or clamping screws
- Mounting hole pattern at the front, alternative mounting with shaft-clamping bush

Optional:

- Integrated position sensing for closed and open positions
- Mounting fixtures

Ordering example:

APG 40.1 BR2 AS A10 T12 45°
 ↳ Opening angle (2 x 45°)
 ↳ Position sensing system
 ↳ Arm variants
 ↳ Dual arm
 ↳ Piston Ø
 ↳ Type

Order code TÜNKERS position sensing systems:

...T00 without position sensing
 ...T12 24 V inductive position sensing, 1 output with integral LEDs

Opening angle:

Supplied in 2 x 85° configuration. Other variants on request!

Type	Clamping force at 5 bar (N)	Operating pressure with oil-free air (bar)	Maximum pressure with oil-free air (bar)	Mounting (G)	Opening and closing time (approx. sec.)	Weight (kg)
APG 40.1 BR2 AS	600	5	6	1/8	1	2,0


Type	L1	L2	L3	L4	L4a	L4b	L5	L6	L7	L8	L9	L10	B1	B2	B3	B4	B4a	B5	B6	B7	B8	B9	B10
APG 40.1 BR2 AS	210	165	87	20	53,5	120	16	47	17	66,5	32	10	195	15	22	34	41	24	70	54	66	45	30

Type	B11	B12	B13	B14	B15	D1	D2	D3	D4	D5	D6	SW
APG 40.1 BR2 AS	30	80	60	20	30	30	40	M8	8	8	M8	9

Subject to technical modifications.



Attachment adapter to fit pneumatic grippers APG 40 and APG 40 AS, to attach the tube attachment arm on the 25/40 mm diameter TÜNKERS modular gripper system

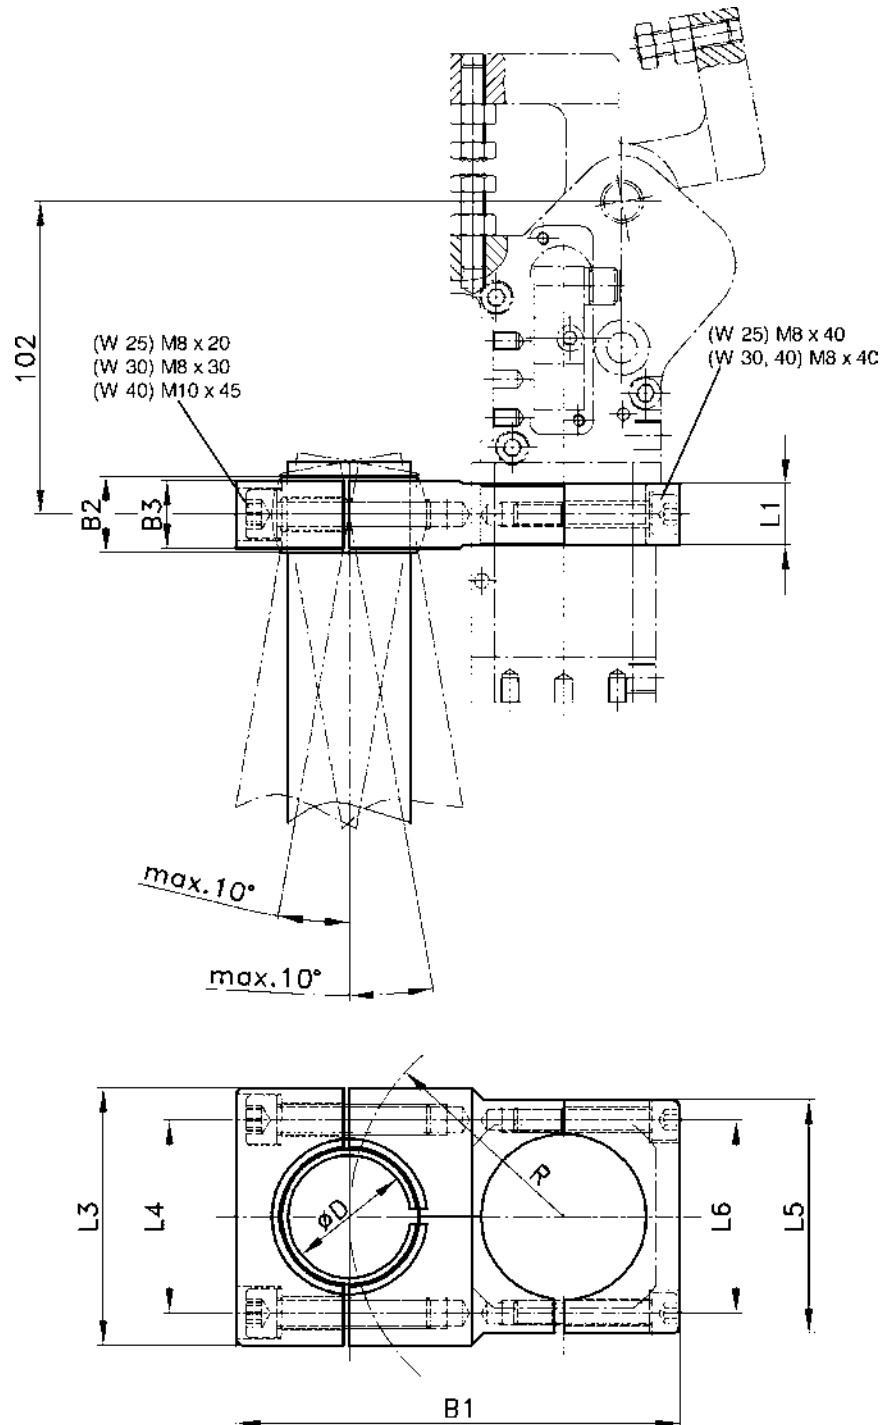

Type	Weight ~(kg)	B1	B2	B3	L1	L3	L4 ±0.2	L5	L6 ±0.2	D	R
W 25	0,4	127	20	16	20	65	63	76	50	25	65
W 30	0,5	133	16	16	20	76	63	76	63	30	70
W 40	0,6	145	25	22	20	84	63	76	63	40	70

Ordering example – Order No.

W25 Article No. 260257

W30 Article No. 287302

W40 Article No. 260258

Subject to technical modifications.



Pneumatic Gripper GN 32/40


CLAMPING



- Compact gripper with gate mechanism
- Fully-enclosed housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 32/40 mm
- One synchronously-driven clamp arms with mounting for gripper jaws, contour blocks or clamping screws
- Attachment using adapter
- Head can be rotated 360°

Optional:

- Integrated position sensing for closed and open positions
- Mounting variants K1, K2, K3

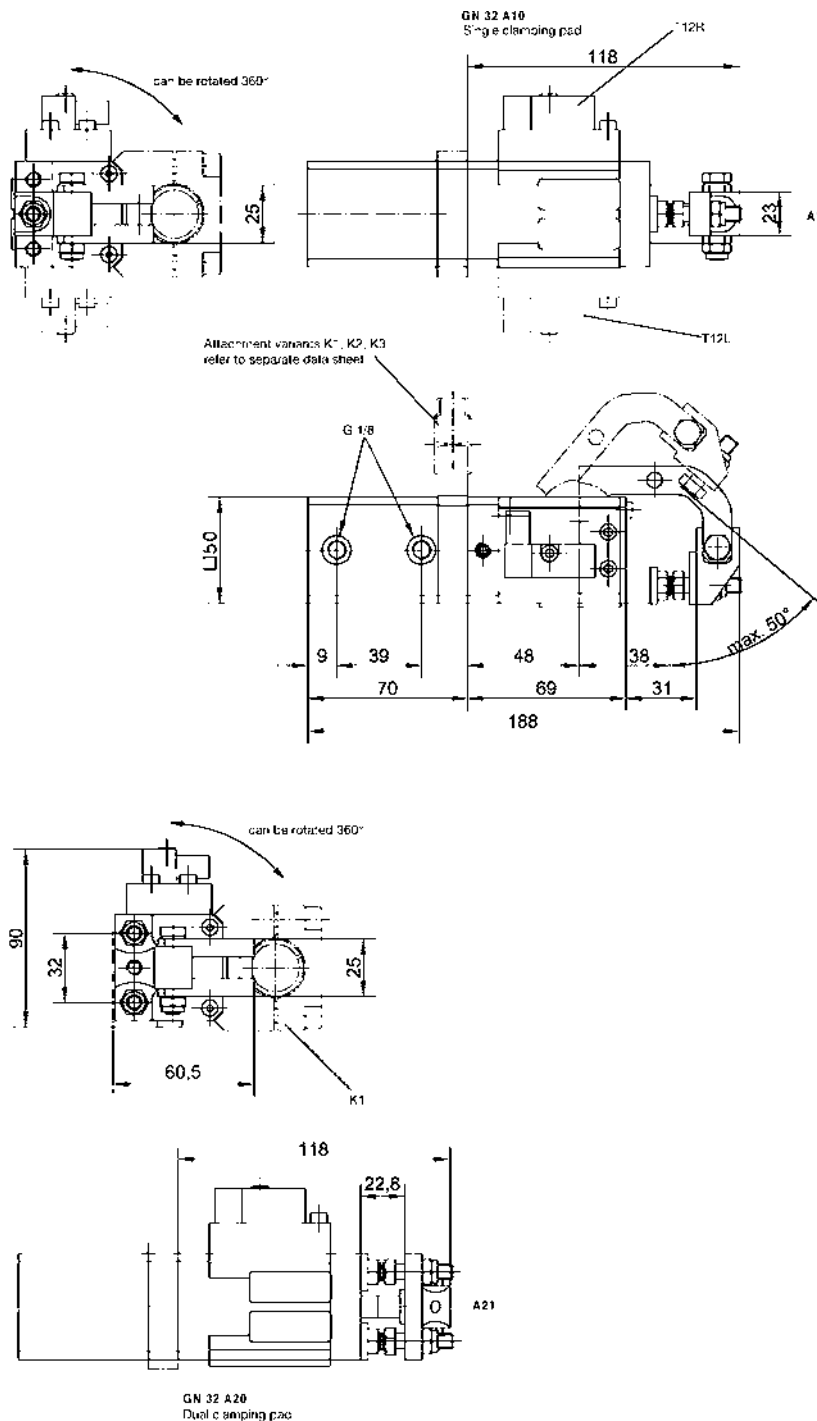

Ordering example:

GN 32 A21 K1 T12R 50°
 ↳ Type ↳ Arm variants, incl. clamping screws corrugated carbide tips ↳ Mounting ↳ Sensing on the right (optional left) with LEDs ↳ Opening angle

Opening angle:

Standard: 50°
 Optional: 15°, 30°, 45°

Type	Clamping torque at 5 bar (N)	Max. holding torque (N)	Dimensions (l x w x d) (mm)	Weight (kg)
GN 32	600	600	139x50x50	1,3
GN 40	1000	1000	165x55x55	2,0

Subject to technical modifications.

Pneumatic Gripper GN 32/40 AS




CLAMPING



- Compact gripper with curve driven lever mechanism
- Fully-enclosed housing made from high-strength aluminum material
- Integral pneumatic cylinder, Ø 32/40 mm
- Two synchronously-driven clamp arm with mounting for gripper jaws, contour blocks or clamping screws
- Attachment by means of adapters
- Head can be rotated 360°

Optional:

- Integrated position sensing for closed and open positions
- Mounting variants K1, K2, K3

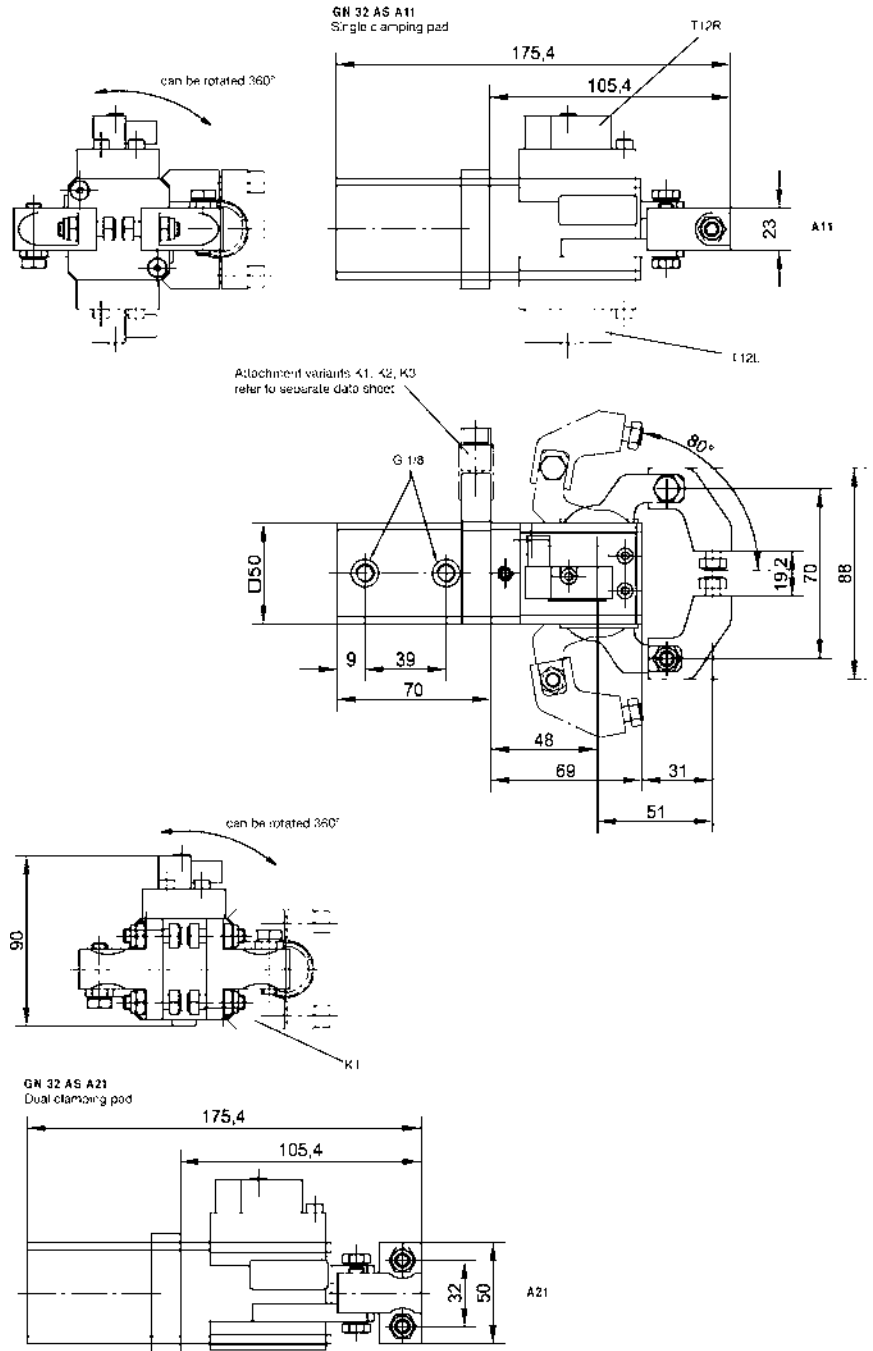

Ordering example:

GN 32 AS A 21 K1 T12R 2x80°

screw → Type
 A → Clamp arm
 21 → No. of clamping positions · 1 = with clamping screw · 0 = without clamping
 K1 → Mounting
 T12R → Sensing on the right (optional left) with LEDs
 2x80° → Opening angle



Opening angle:

Standard: 2x80°



Optional: 2x30°, 2x45°, 2x60°

Type	Clamping torque at 5 bar (N)	Max. holding torque (N)	Dimensions (l x w x d) (mm)	Weight (kg)
GN 32 AS	400	400	139x50x50	1,1
GN 40 AS	600	600	165x55x55	1,8

Subject to technical modifications.

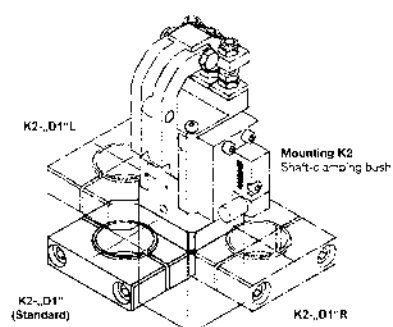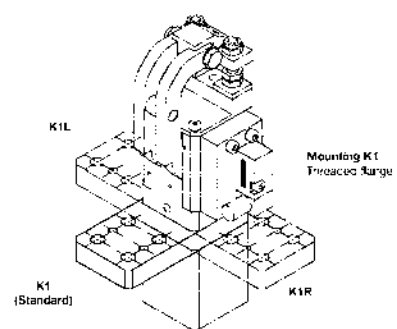

D1	B1	B2	B3	B4	L1	α
25	116.5	88	19	16	65	15
30	117.5	90	20	16	75	15
40	128.5	100	25	18	84	15



K2 GN 32 25 L

- Left-hand version ('R' = right-hand)
- Diameter „D1“
- Pneumatic Grippers Type
- Shaft-clamping bush


1 - 30 |



- Compact gripper with curve-drive mechanism
- One driven and one fixed gripper arm
- Robust housing made from high-strength aluminum material with integral pneumatic cylinder
- Steel gripper arms with curve driven lever mechanism and mounting for gripper jaws
- Multi-sided mounting options on the housing

Optional:

- Integrated position sensing for the closed and open positions
- Sensor for component recognition
- Lateral external stops for work-piece positioning

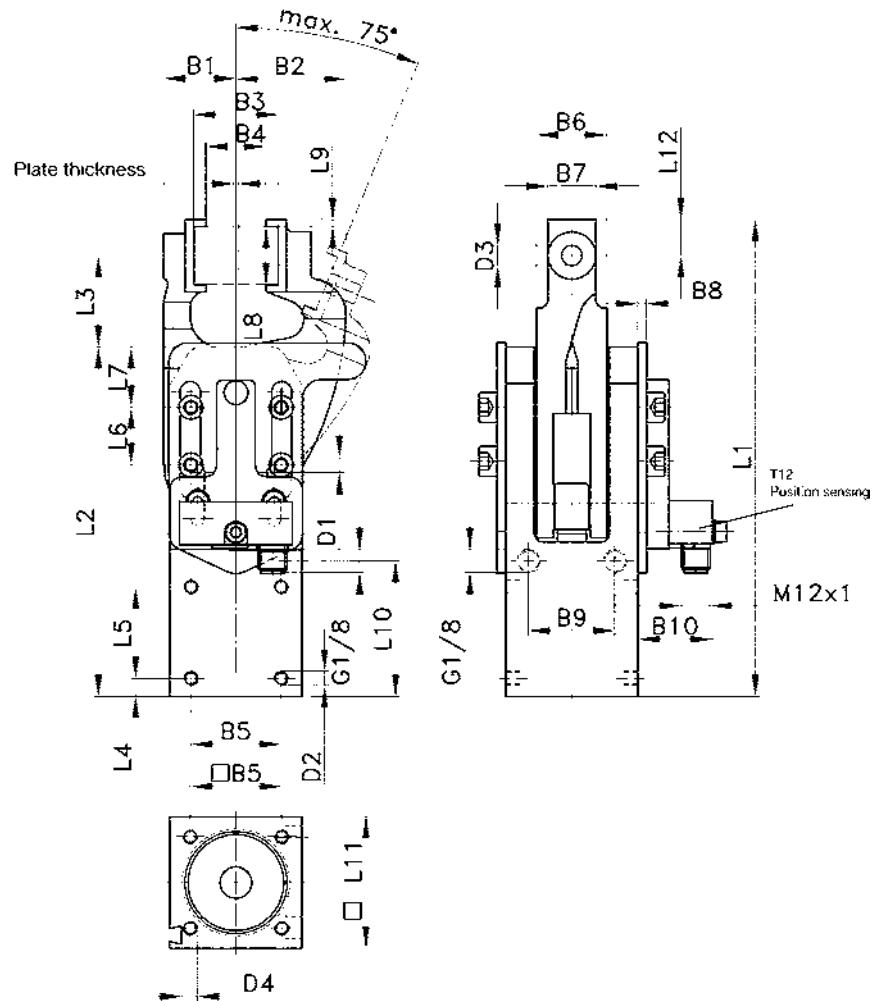

Ordering example:

PG 32 T12 22,5°
 ↓
 Type Opening angle
 Position sensing system
 Piston Ø

Order code TÜNKERS position sensing systems:

...T00 without position sensing
 ...T12 24 V inductive position sensing,
 1 output with integral LEDs

Opening angle:

Available in 2 x 22.5°, 2 x 45° and 2 x 75° configurations

Accessories:

- Clamping jaws (not included in the scope of delivery)
- Adjustable plates (not included in the scope of delivery)
- Protective panel to prevent impact damage to the housing

Type	Clamping force at 5 bar (N)	Operating pressure with oil-free air (bar)	Maximum pressure with oil-free air (bar)	Mounting (G)	Opening and closing time (approx. sec.)	Weight (kg)
PG 32	900	5	6	1/8	1	0,87
PG 40	1300	5	6	1/8	1	approx. 1,5

Type	L1	L2	L3	L4 ±0,1	L5 ±0,1	L6 ±0,1	L7	L8 ±0,02	L9 ±0,05	L10	L11	L12	B1	B2	B3 ±0,1	B4 ±0,1	B5 ±0,1	B6	B7	B8	B9	B10	D1
PG 32	158	116	30,5	6	30	17,5	20	19	2,5	55	45	11,5	24	36	28	20	30	23	16	3	28	18	M6
PG 40	198	145	38	7,5	38	24	25	24	3	56	55	15	30	46	35	25	38	29	20	3,5	36	20	M6

Type	D2 ø	D3 ø	D4 ø
PG 32	M5	M8	M6
PG 40	M6	M10	M6

Subject to technical modifications.



Pneumatic Gripper PG 32/40 AS


CLAMPING



- Compact gripper with curve-drive mechanism
- Two synchronously-driven gripper arms
- Robust housing made from high-strength aluminum material with integral pneumatic cylinder
- Steel gripper arms with curve driven lever mechanism and mounting for gripper jaws
- Multi-sided mounting options on the housing

Optional:

- Integrated position sensing for the closed and open positions
- Sensor for component recognition
- Lateral external stops for work-piece positioning

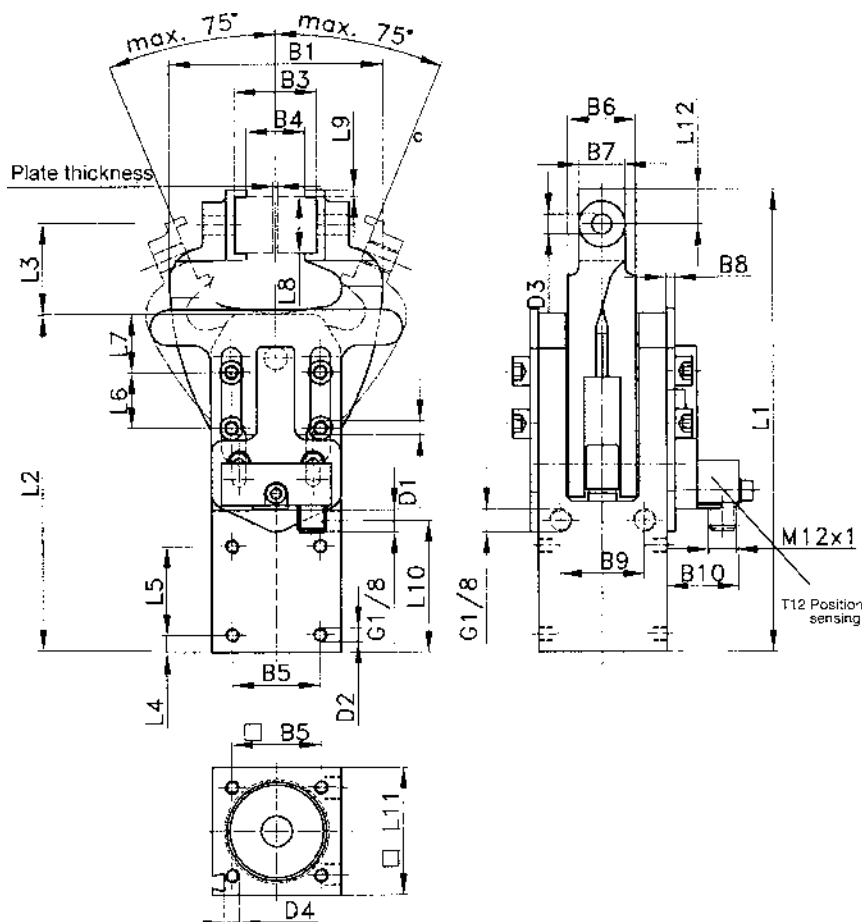

Ordering example:

PG 32 AS T12 22,5°
 ↓ Opening angle
 ↓ Position sensing system
 ↓ Arm variants (both movable)
 ↓ Piston Ø
 ↓ Type

Order code TÜNKERS position sensing systems:

...T00 without position sensing
 ...T12 24 V inductive position sensing,
 1 output with integral LEDs

Opening angle:

Available in 2 x 22.5°, 2 x 45° and 2 x 75° configurations

Accessories:

- Clamping jaws (not included in the scope of delivery)
- Adjustable plates (not included in the scope of delivery)
- Protective panel to prevent impact damage to the housing

Type	Clamping force at 5 bar (N)	Operating pressure with oil-free air (bar)	Maximum pressure with oil-free air (bar)	Mounting (G)	Opening and closing time (approx. sec.)	Weight (kg)
PG 32 AS	900	5	6	1/8	1	0,91
PG 40 AS	1300	5	6	1/8	1	approx. 1,55


Type	L1	L2	L3	L4 ±0,1	L5 ±0,1	L6 ±0,1	L7	L8 ±0,02	L9 ±0,05	L10	L11	L12	B1	B2	B3 ±0,1	B4 ±0,1	B5 ±0,1	B6	B7	B8	B9	B10	D1 e
PG 32 AS	158	116	30,5	6	30	17,5	20	19	2,5	55	45	11,5	24	36	28	20	30	23	16	3	28	18	M6
PG 40 AS	198	145	38	7,5	38	24	25	24	3	56	55	15	30	46	35	25	38	29	20	3,5	36	20	M6

Type	D2 e	D3 e	D4 e
PG 32 AS	M5	M8	M6
PG 40 AS	M6	M10	M6

Subject to technical modifications.

CLAMPING

Parallel Grippers





Parallel Grippers


Parallel Grippers

With extremely high clamping forces combined with compact dimensions, parallel grippers are particularly suitable for clamping/holding heavy workpieces. The centrally-closing gripper jaws ensure that the position of the workpiece remains unchanged during the gripping operation.

As the transmit power is applied in both directions, the TÜNKERS parallel gripper can be used for external as well as internal gripping. The constant clamping force applied over the full stroke makes it possible to grip workpieces with undefined dimensions and surfaces (casting materials).

The optional non-return valve maintains the clamping position even in the event of a loss of pressure. The mounting dimensions are compatible with the current industry standard, thus ensuring replaceability during servicing operations.

Design principle

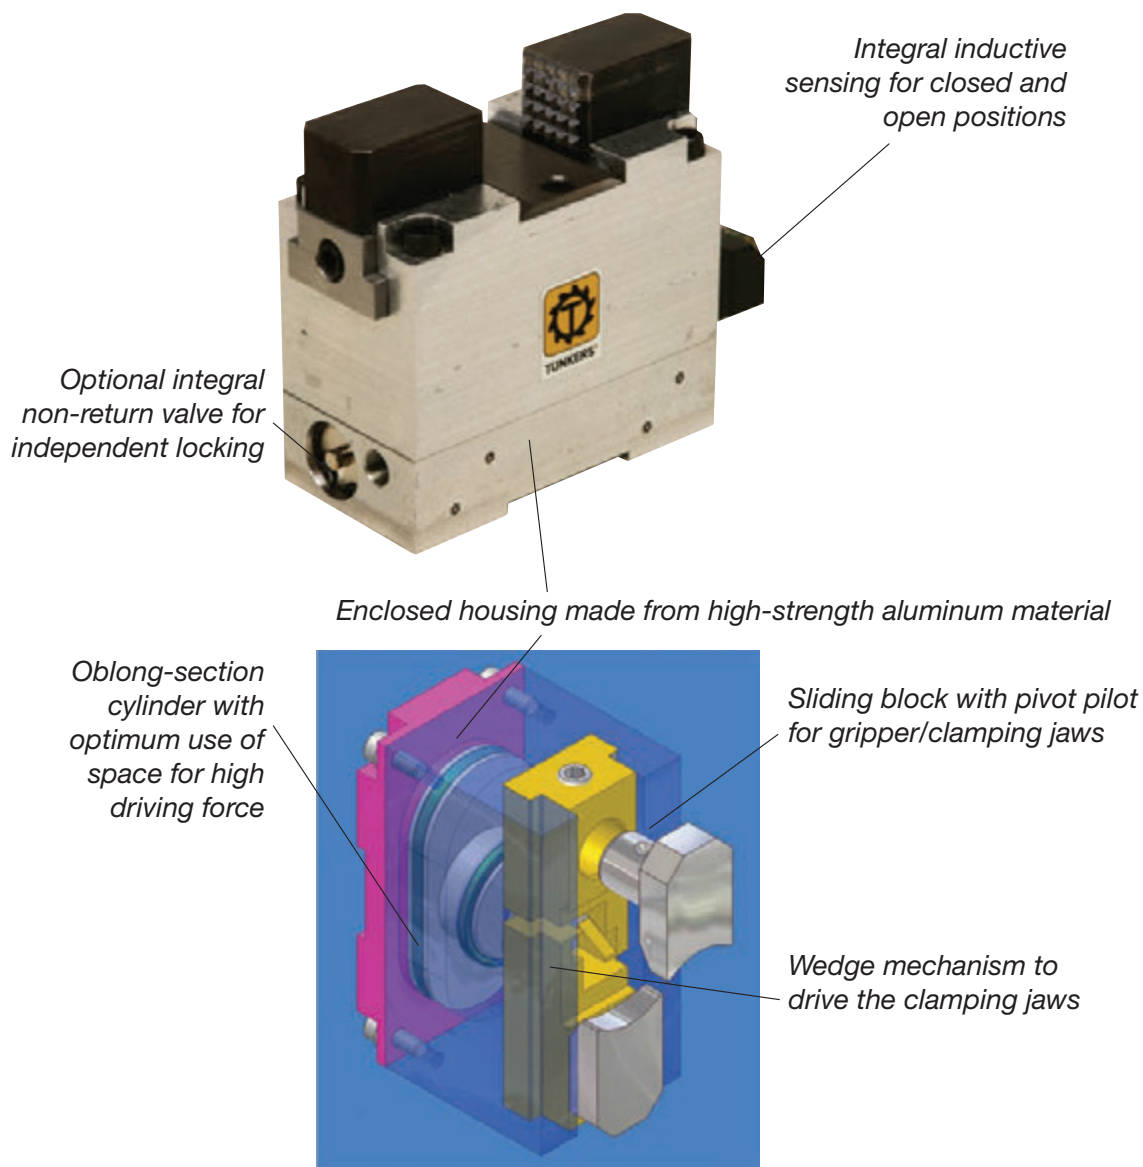



Parallel Gripper GP 80-200 (typical example)



Parallel gripper with clamping jaws to secure rod material

Product range

					
Type	GP 80	GP 100	GP 125	GP 160	GP 200
Clamping force (N)	1200	1700	3000	5000	7500
Stroke (mm)	4	4	6	8	14
Locking	Optional	Optional	Optional	Optional	Optional
Weight (kg)	1,3	1,5	2,7	8,2	12



Parallel Gripper GP 80-200


CLAMPING



- Compact gripper with wedge mechanism, synchronously driving two clamping jaws
- Robust housing made from high-strength aluminum material with integral oblong-section pneumatic cylinder
- Clamping jaw mounting with circular-section spigots
- Multi-sided mounting options

Optional:

- End position sensing
- Pneumatic self-locking with integrated non-return valve

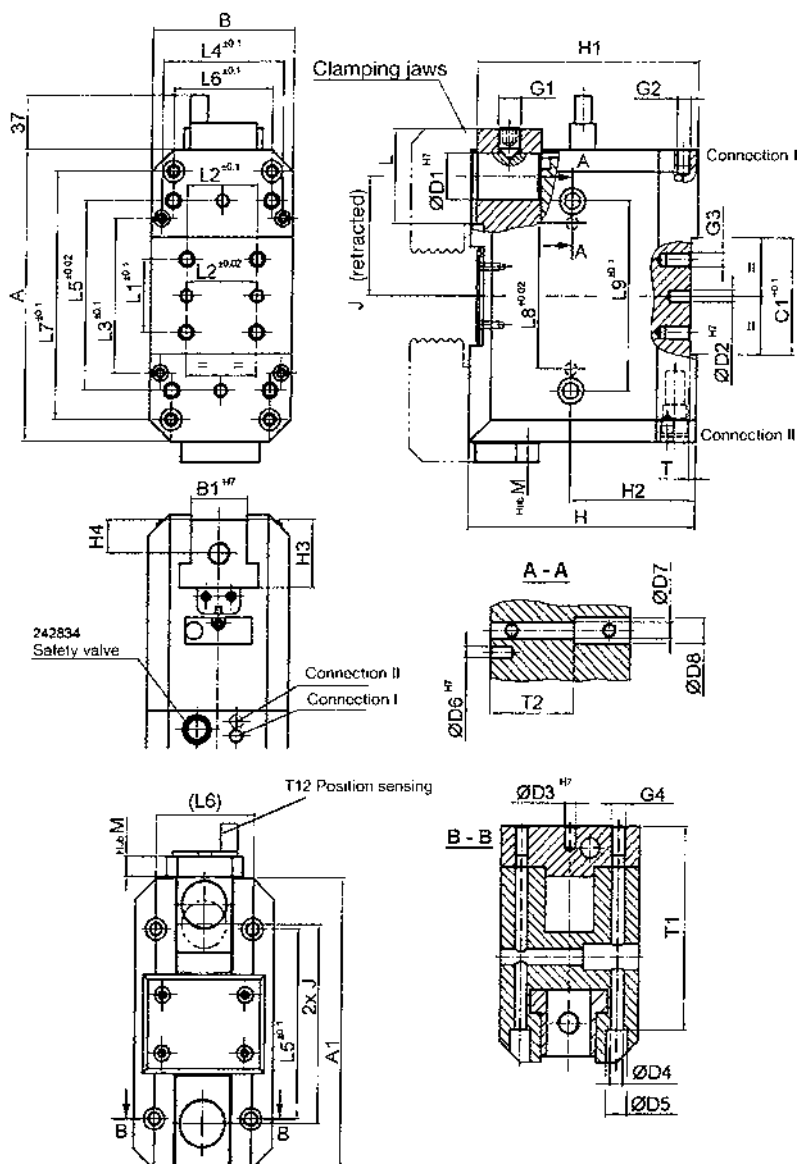

Type	max. pressure (p) (bar)	max. clamping force at 5 bar external clamping at N	max. clamping force at 5 bar internal clamping at N	Weight (kg)
GP 80...	10	1200	800	1,3
GP 100...	10	1900	1400	1,5
GP 125...	10	3000	2400	2,7
GP 160...	10	5000	4000	5,2
GP 200...	10	7500	6000	12

Ordering example:

GP 80 H T12
 ↳ Type
 ↳ Pneumatic self-locking
 ↳ Position sensing system

Order code, TUNKERS position sensing system:
 ...T00 without position sensing
 ...T12 24 V inductive position sensing, 1 output with integral LEDs

Options:
 - Clamping jaws to customer's choice
 - Pneumatic self-locking „H“


Type	A	A1	B	B1	C1	D1	D2	D3	D4	D5	D6	D7	D8	G1	G2	G3	G4
GP 80...	100	80	50	20	40	13	6x8	-	-	-	4x5	5,5	9,5	G1/8	M8x12	M6x10	-
GP 100...	100	100	50	24	40	16	6x8	-	-	-	-	-	-	G1/8	M10x14	M6x10	-
GP 125...	125	125	60	28	40	20	6x8	-	6,6	11	6x11	9	15	G1/8	M10x16	M6x10	M8x18
GP 160...	160	160	72	35	80	25	8x14	-	6,6	11	6x11	9	15	G1/8	M12x20	M10x16	M8x18
GP 200...	200	200	100	40	80	32	8x14	8x14	9	15	8x14	11	18	G1/8	M16x25	M10x16	M10x20

Type	H	H1	H2	H3	H4	J min.	J max.	L	L1	L2	L5	L6	L8	L9	M	T	T1	T2
GP 80...	83	80	50	19	9,5	25,5	29,5	25	25	35	-	-	50	32	4	3	-	42
GP 100...	83	80	-	20	10	32	36	32	25	35	-	-	-	-	4	3	-	-
GP 125...	100	97	59	25	12,5	40	46	42	25	35	110	45	62	86	6	3	90	52
GP 160...	123	119	72,5	30	15	52,5	60,5	55	50	50	100	56	76	100	8	4,5	110	55
GP 200...	162,5	158,5	90	46	23	67,5	81,5	65	50	50	130	70	100	130	14	4,5	140	60

Subject to technical modifications.

CLAMPING

Standard Clamps






Standard Clamps

Due to their enclosed structure, TÜNKERS standard clamps, with sizes 50 to 80, provide solutions for clamping and gripping forces up to 4 kN. In addition to the robust construction, with integral needle roller bearings for optimum force transmission and high load cycles (up to 3 million), a particular feature of TÜNKERS Clamps is the slim version with the oblong-section cylinder. This allows optimum accessibility in fixtures, for the use of spot welding guns.

All the standard series knee-lever clamps are equipped with integrated limit switches in cassette form, thus facilitating replacement and adjustment. As an option, the products are available with manual feed.

Configuration of a knee-lever clamp

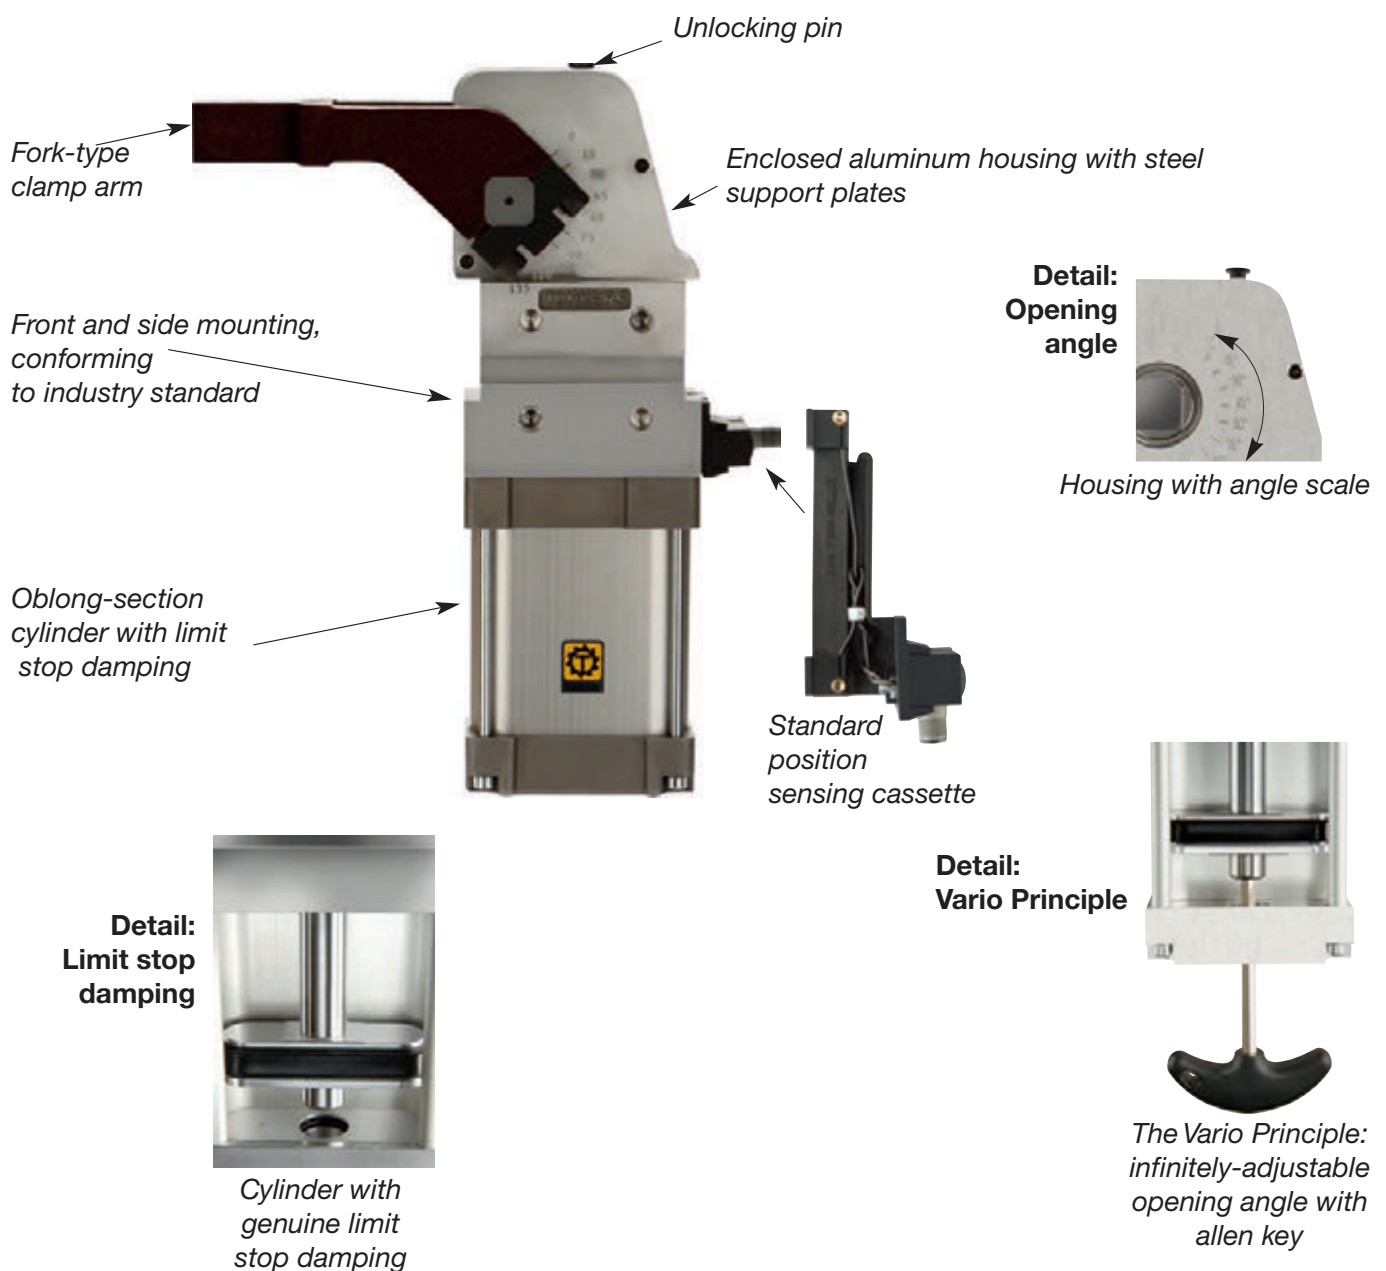

Manual feed

Secure over-centre locking due to adaptable – right- or left-hand-operated lever, which directly activates the cylinder piston rod.



End position detent

Optional mechanical retaining clip, which can be mounted on the right or left side and secures the clamp arm in the end position, even in the case of large and heavy contour blocks



The ALPHA principle

With extremely compact dimensions and the new design of mechanism, the ALPHA Clamp is capable of completely new applications in fixture construction.

ALPHA Plus Compact

Monocoque construction with cylinder and mechanism enclosed in one compact housing

Result: Shorter tool length, lower weight, reduced space in the installation and higher power density.



V 63 Standard Clamp
for comparison




APH 63

**Cylinder integral
with the housing!**

ALPHA Plus curve-drive mechanism

Early-acting clamping force, applied throughout a defined range of angles. The adjustment function-compensates for the negative effects of tolerances, adjusting actions or wear of the contour parts and mechanism with no loss of clamping force. When clamping components with undefined tolerance, such as cast components.

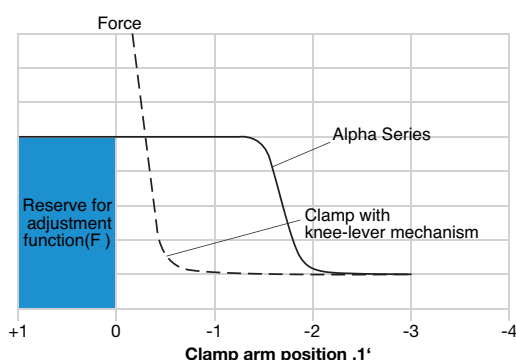

ALPHA for repetitive pressing

The ALPHA Series


- The applied force holding function compensates for variations in components and adjusting actions in the fixture
- Defined and constant clamping force which is applied to the component
- Benefits: when clamping components with undefined surfaces (cast parts) and pressure-sensitive materials (aluminum)






Standard Clamps


Typical applications

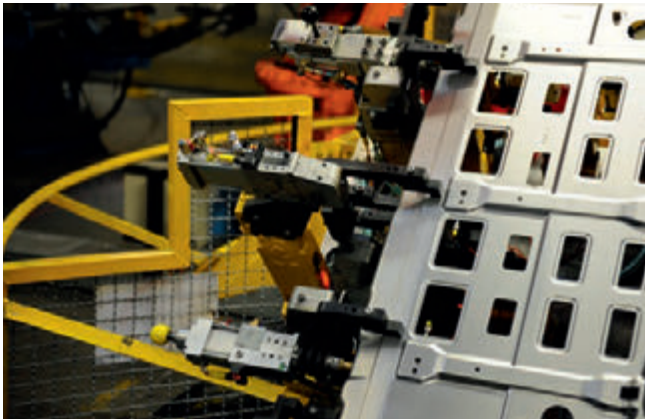


Vario Clamp with lateral arm

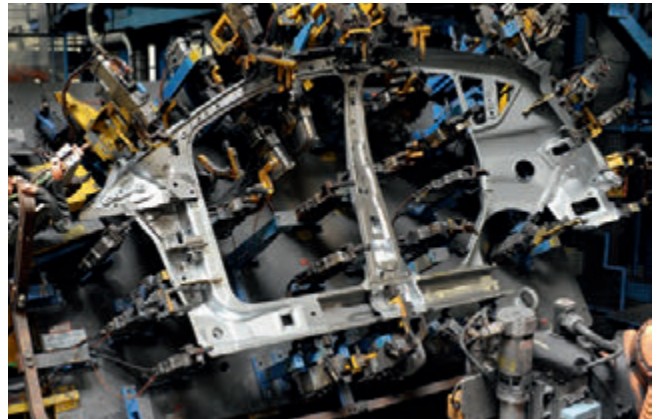

Clamping fixture with Vario Clamp for side wall body panel

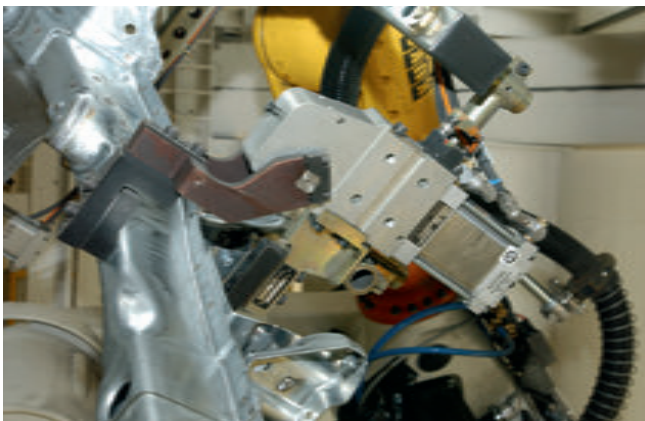


Vario Clamp for positioning side members

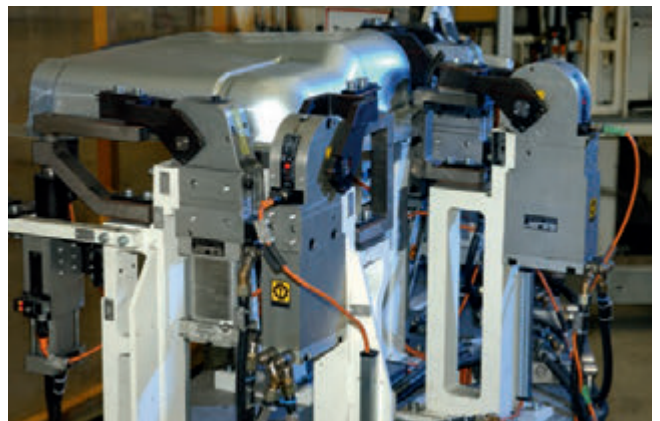

Group of clamps with Vario and Alpha Clamps




Detail: Alpha Gripper with contour pressure block

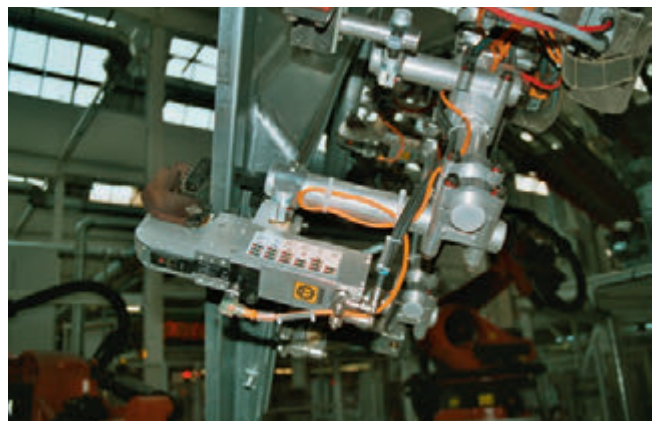

Alpha Clamp fitted to robot gripper

V Series Standard Clamp V/V2... .1 BR2 5-135°

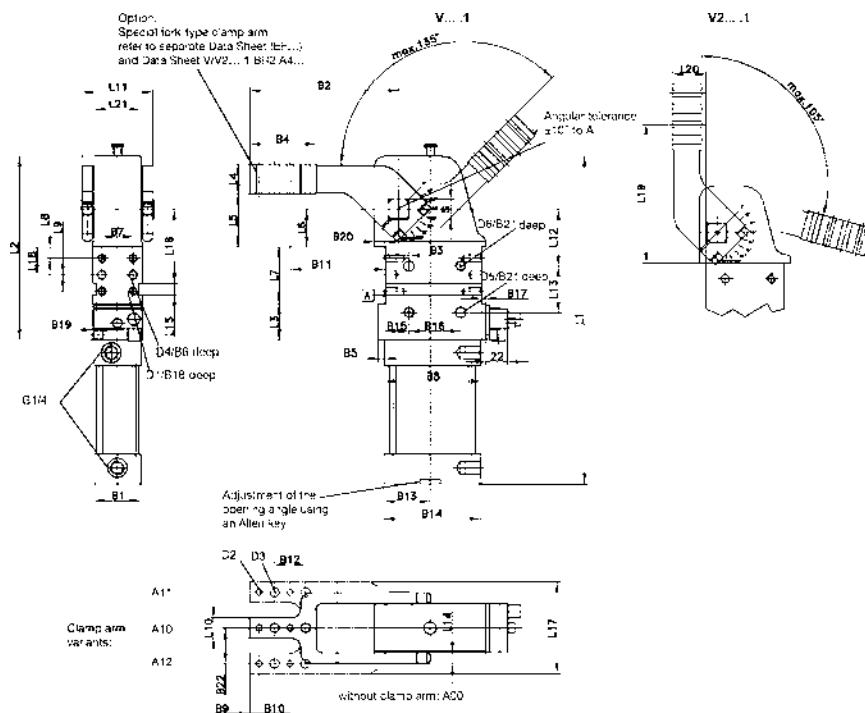

- Vario Clamp with knee-lever mechanism and stepless adjustable opening angle
- Over-centre locking
- Enclosed housing made of aluminum
- Oblong-section cylinder in sizes 50, 63, 80
- Fork-type clamp arm with standard hole pattern for mounting contour blocks
- Opening angle stepless adjustable from 5° to 135°

Optional:

- Inductive sensing, weld-resistant for closed and open positions (T12)

Ordering example:

V 50.1 BR2 A10 T12

Position sensing
Clamp arm variants
Type

Position sensing variants:

...T12 24 V inductive position sensing, 1 output with integral LEDs

Type	Max. holding torque (Nm)	Clamping torque at 5 bar (Nm)	Piston Ø (mm)	Weight ~ (kg)
V/V2 50.1	800	160	50	3,9
V/V2 63.1	1500	380	63	4,8
V/V2 80.1	2500	800	80	14

Type	B1	B2	B3 ±0,05	B4	B5	B6	B7*	B8*	B9	B10 ±0,02	B11 ±0,1	B12 ±0,2	B13	B14	B15 ±0,1	B16*	B17	B18	B19	B20	B21	B22 ±0,1	D1
V/V2 50.1	48	144	10	65	6,5	12	30	93	9	30	92	30	47	94	23	50	4,5	12	3,5	10,5	12	34	M8
V/V2 63.1	54	144	10	65	7,5	12	30	93	9	30	92	30	54	106	23	50	7,5	12	3,5	12	12	37	M8
V/V2 80.1	76	179	15	65	8	12	50	134	9	30	119	30	70	140	36	70	8	15	3,5	20	13	50,5	M10

Type	D2 H7	D3	D4 H7	D5 H7	D6	L1	L2	L3	L4 ±0,1	L5 ±0,2	L6 ±0,05	L7 ±0,1	L8 ±0,1	L9 ±0,1	L10	L11	L12 ±0,05	L13*	L14 ±0,1	L15 N9	L16 ±0,05	L17	L18 ±0,05
V/V2 50.1	6	9	8	10	M10	321	178	35	28	51,5	36,5	55	11	32	20	68	55	45	10	12	71,5	78	27
V/V2 63.1	6	9	8	10	M10	335	185	35	28	51,5	36,5	55	11	32	20	78	55	45	10	12	71,5	86	27
V/V2 80.1	6	9	8	12	M12	488	270	55	35	70	50	80	15	50	25	108	65	75	12,5	12	96,5	117	40

Type	L19 ±0,1	L20 ±0,2	L21	S h9
V/V2 50.1	141,5	30	45	19
V/V2 63.1	141,5	30	52	22
V/V2 80.1	190	34	74	30

Subject to technical modifications.




V Series Standard Clamp V/V2... .1 BR2 Z 5-120°



- Vario Clamp with hand lever, knee-lever mechanism and stepless adjustable opening angle
- Over-centre locking
- Enclosed housing made of aluminum
- Oblong-section cylinder in sizes 50, 63, 80
- Fork-type clamp arm with standard hole pattern for mounting contour blocks
- Opening angle stepless adjustable from 5° to 120°

Optional:

- Inductive sensing (weld-resistant for closed and open positions (T12))

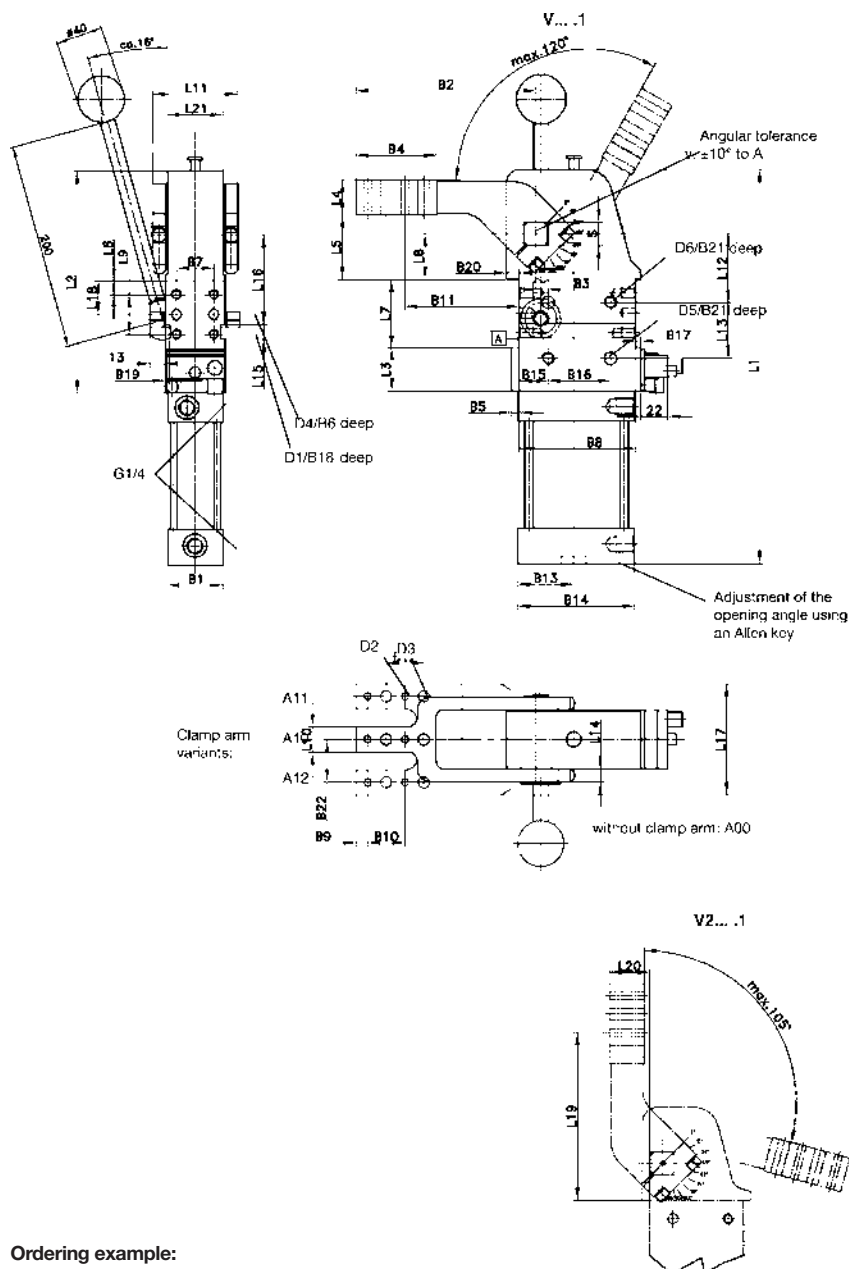

Ordering example:

V 50.1 BR2 Z A10 T12
 ↳ Type ↳ Manual feed ↳ Clamp arm variants ↳ Position sensing

Position sensing variants:
 ...T12 24 V inductive position sensing, 1 output with integral LEDs


Type	B1	B2	B3 ±0,05	B4	B5	B6	B7*	B8*	B9	B10 ±0,02	B11 ±0,1	B12 ±0,2	B13	B14	B15 ±0,1	B16*	B17	B18	B19	B20	B21	B22 ±0,1	D1
V/V2 50.1	48	144	10	65	6,5	10	30	93	9	30	92	30	47	94	23	50	4,5	11	3,5	10,5	12	34	M8
V/V2 63.1	54	144	10	65	7,5	10	30	93	9	30	92	30	54	106	23	50	7,5	11	3,5	12,5	12	37	M8
V/V2 80.1	76	179	15	65	8	12	50	134	9	30	119	30	70	140	36	70	8	15	3,5	20	13	50,5	M10

Type	D2 H7	D3	D4 H7	D5 H7	D6	L1	L2	L3	L4 ±0,1	L5 ±0,2	L6 ±0,05	L7 +0,1	L8 ±0,1	L9 ±0,1	L10	L11	L12 ±0,05	L13*	L14 ±0,1	L15 N9	L16 ±0,05	L17	L18 ±0,05
V/V2 50.1	6	9	8	10	M10	321	178	35	28	51,5	36,5	55	11	32	20	68	55	45	10	12	71,5	78	27
V/V2 63.1	6	9	8	10	M10	361	211	61	28	51,5	36,5	55	11	32	20	78	55	45	10	12	71,5	86	27
V/V2 80.1	6	9	8	12	M12	486	270	55	35	70	50	80	15	50	25	108	65	75	12,5	12	96,5	117	40


Type	L19 ±0,1	L20 ±0,2	L21	S h9
V/V2 50.1	141,5	30	45	19
V/V2 63.1	141,5	30	52	22
V/V2 80.1	190	34	74	30

Type	Max. holding torque (Nm)	Clamping torque at 5 bar (Nm)	Piston Ø (mm)	Weight (kg)
V/V2 50.1	800	160	50	4,0
V/V2 63.1	1500	380	63	5,2
V/V2 80.1	2500	800	80	17

Subject to technical modifications.

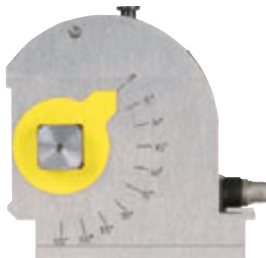

Drive shaft with angle indicator

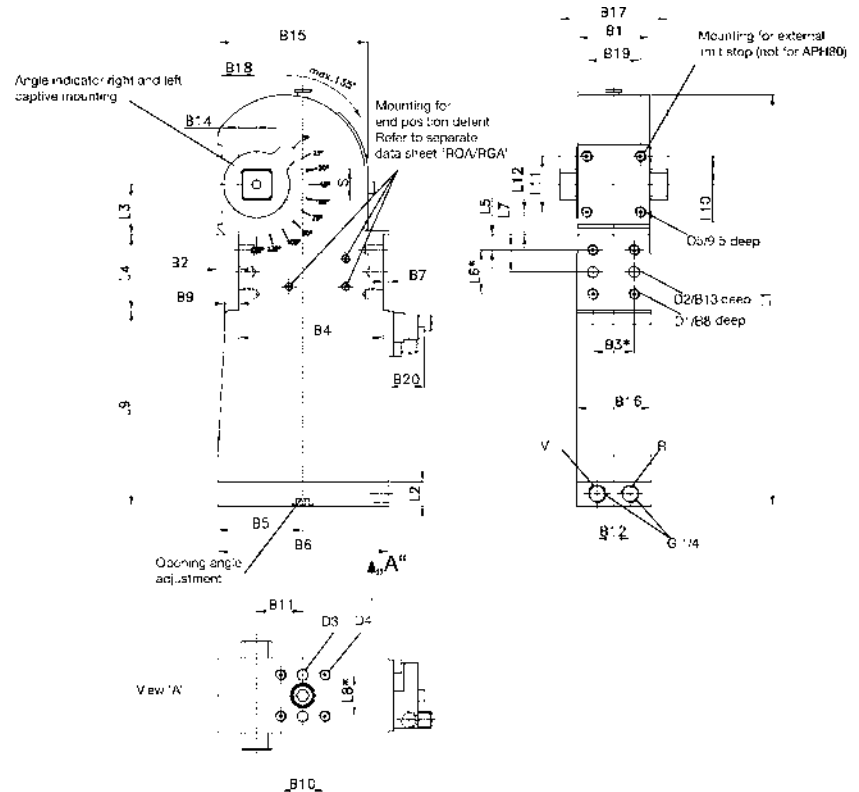

- Compact clamp with curve-drive mechanism for constant clamping force and applied force holding
- Enclosed monocoque housing made from aluminum material with integral mechanism and oblong-section cylinder, sizes 50/63/80
- Fork-type clamp arm with standard hole pattern for mounting contour blocks
- Opening angle stepless adjustable from 15° to 135°
80 Ø T12 – 30 to 135°
80 Ø T60 – 60 to 135°
- Pneumatic end position damping

Optional:

- Inductive sensing (weld-resistant for closed and open positions (T12))
- Pneumatic locking of the end positions (V+R setting) (H)
- Hand lever (Z)

Ordering example:

APH 50 H A00-K00 T12
 ↓ Type
 ↓ Piston Ø
 ↓ pneumatic locking
 ↓ Clamp arm variants
 ↓ Position sensing

Order code TÜNKERS position sensing systems:

...T12 24 V inductive position sensing, 1 output with integrated LEDs, insulated as per DIN VDE 0100

Please note!

External flow control valves must be fitted during assembly.

Type	Max. holding torque (Nm)	Clamping torque at 5 bar (Nm)	Piston Ø (mm)	Weight (kg)
APH 50	200	200	50	3,5
APH 63	400	400	63	4,3
APH 80	800	800	80	12

Type	B1	B2 ±0,05	B3*	B4 ±0,1	B5	B6	B7	B8	B9	B10 ±0,1	B11 ±0,05	B12	B13	B14
APH 50	45	11	30	98	54,5	112	3	11	6	32	30,5	24	10	13
APH 63	52	15	30	105	61,5	124	4	11	10	32	33,5	24	10	13
APH 80	74	20	50	143	78	153	5	15	5	50	52	40	12	21

Type	B15	B16	B17	B18	B19 ±0,1	D1	D2 H7	D3 H7	D4	D5	~L1	L2	L3 ±0,05	L4 +0,1
APH 50	97	48	69	22	32	M8	8	8	M8	M8	296	28	36,5	55
APH 63	106,5	54	79	25,5	39	M8	8	8	M8	M8	309	28	36,5	55
APH 80	150	76	108	-	-	M10	8	8	M10	-	455	42	50	80

Type	L5 ±0,1	L6 ±0,2	L7 ±0,05	L8 ±0,1	L9	L10 ±0,1	L11 ±0,1	L12 ±0,1	S h9
APH 50	11	32	27	30	143	30	35,5	21	19
APH 63	11	32	27	30	152	29	40,5	16,5	22
APH 80	15	50	40	50	225	-	-	-	30

Subject to technical modifications.




- Inductive sensing
(weld-resistant for closed and open positions (T12))



Type	Max. holding torque (Nm)	Clamping torque at 5 bar (Nm)	Piston Ø (mm)	Weight (kg)
APH 40.5	120	120	40	2.4

1 - 44 |

Universal Clamp U/U2 50, 63, 80 A10

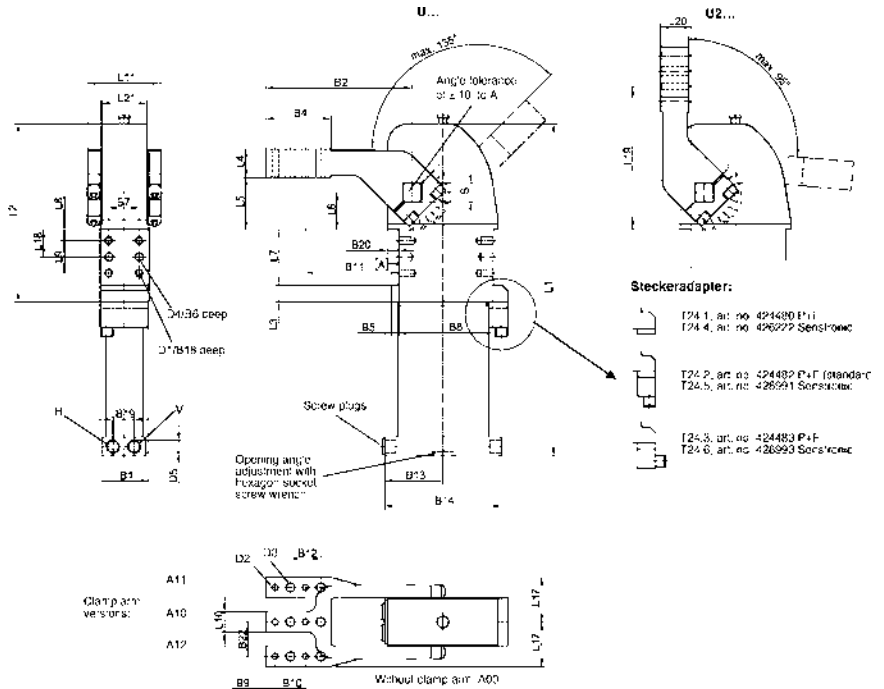

CLAMPING

Patented

- New standard series
- Universal clamp with force-optimised knee-lever mechanism
- Compressed air consumption reduced by approx. 30% by using smaller cylinder diameters of 50, 63, 80 mm
- Optional weld protection using Gliss coating
- Both pneumatic connections in the base plate

Position sensing variants:

- ...T24.1/4 Without plug adapter
- ...T24.2/5 With straight plu adapter (standard)
- ...T24.3/6 With plug adapter 90° angle

Opening angle:

Stepless adjustable in the range of 5° to 135° (type U 50/63), 10° to 135° (type U 80)

Ordering example:

U 50 W A10 T24.2

- Type
- Without plug adapter
- Clamp arm variants
- Position sensing
- On request: Weld spatter-resistant coating for the housing

Type	Max. holding torque (Nm)	Clamping torque at 5 bar (Nm)	Weight ~ (kg)
U/U2 50	800	160	3,5
U/U2 63	1500	360	4,8
U/U2 80	2500	800	11,6

Type	B1	B2	B4	B5	B6	B7*	B8 ±0,1	B9	B10 ±0,02	B11 ±0,1	B12 ±0,1	B13	B14	B18	B19	B20	B22 ±0,1	D1	D2 H7	D3	D4	D5	L1
U/U2 50	48	144	65	6,5	12	30	93	9	30	92	30	41	82	12	19,5	10,5	34	M8	6	9	8	G 1/8	286
U/U2 63	48	144	65	7	12	30	93	9	30	92	30	57,5	115	12	21	11	37	M8	6	9	8	G 1/4	329
U/U2 80	68	179	65	8	12	50	134	9	30	119	30	67,5	135	15	24	20	50,5	M10	6	9	8	G 1/4	473


Type	L2	L3	L4 ±0,1	L5 ±0,2	L6 ±0,05	L7 ±0,1	L8 ±0,1	L9 ±0,1	L10	L11	L17	L18 ±0,05	L19	L20 ±0,2	L21	S h9
U/U2 50	166	16,5	28	51,5	36,5	55	11	32	20	69	34,5	27	141,5	30	45	19
U/U2 63	175	16,5	28	51,5	36,5	55	11	32	20	79	39,5	27	141,5	30	48	22
U/U2 80	257	29	35	70	50	80	15	50	25	108	63	40	190	35	65	30

Subject to technical modifications.



Standard Clamp Dual-Arm Clamp K...AS

CLAMPING

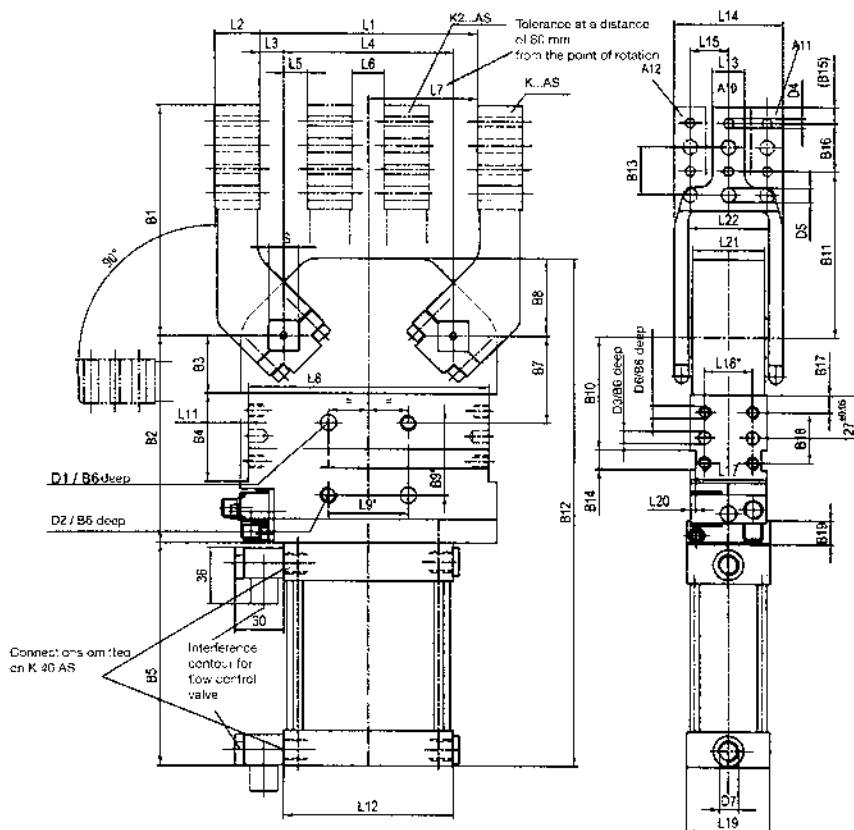

- Compact clamp with knee-lever mechanism for powering two clamp arms
- Over-centre locking
- Enclosed housing made from aluminum material
- Oblong-section cylinder, size Ø 40, 63
- Two fork-type clamp arms with standard hole pattern for mounting one contour block in each clamp
- Opening angle max. 2 x 90°

Optional:

- Inductive sensing (weld-resistant for closed and open positions)

Ordering example:

K 40 AS A10 T12
 ↳ Type ↳ Position sensing system
 ↳ Clamp arm variants

Order code TÜNKERS position sensing systems:

...T00 without position sensing
 ...T12 24 V inductive position sensing, 1 output with integral LEDs

Type	Clamping force at 6 bar (N)	Piston Ø (mm)	Weight (kg)
K 40 AS	550	40	3,5
K 63 AS	1000	63	5,8

Type	B1	B2	B3 ±0,1	B4 +0,1	B5	B6	B7 ±0,05	B8	B9*	B10 ±0,05	B11 ±0,1	B12	B13 ±0,2	B14 N9	B15	B16 ±0,02	B17 ±0,1	B18 ±0,1	B19	D1 H7	D2 ±0,1	D3	D4
K 40 AS	110	97	38	55	125	11	50	38	25	58,5	84	260	20	8	6	20	11	32	-	6	M6	8	6
K 63 AS	144	130	36,5	55	140	12	55	49	45	71,5	105	319	30	12	9	30	11	32	15	10	M10	8	6

Type	D5	D6	D7	L1	L2	L3	L4	L5	L6	L7 ±0,2	L8	L9*	L11	L12	L13	L14	L15 ±0,05	L17	L18*	L19	L20	L21	L22
K 40 AS	7	M8	G1/4	93	19	10	73	10	15	46,5	107	35	5	70	15	55	20	47	30	36	3	34	36
K 63 AS	9	M8	G1/4	136	28	15	106	15	20	68	150	50	5	106	20	68	34	48	30	52	3,5	45	50

Type	S
K 40 AS	11
K 63 AS	19

Subject to technical modifications.





Heavy Duty Clamp HD 100 AS



CLAMPING



- Dual-arm clamp with a clamping force of more than 20,000 N
- Toggle locked end position
- 2 functions in one clamp:
 - internally-adjustable limit stop for precise positioning
 - external preloading for difficult clamping processes
- Fully enclosed steel construction for harsh operating conditions
- Integrated end position sensing

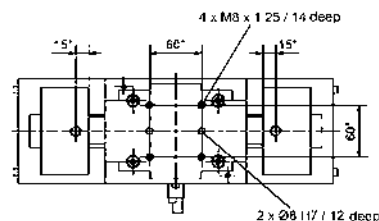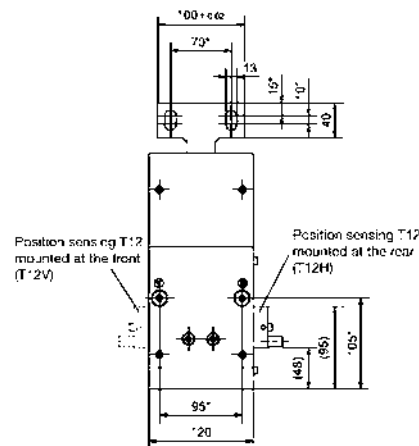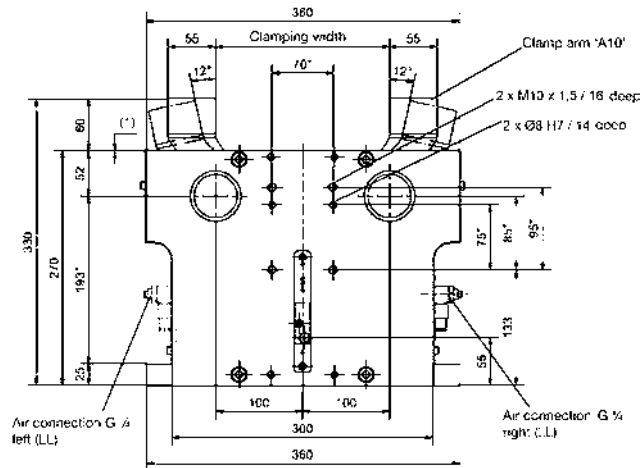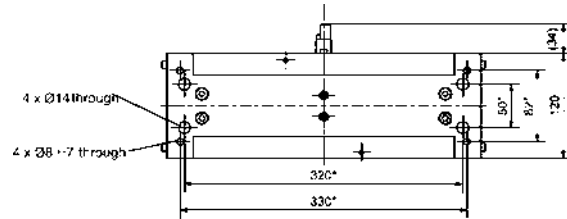

Ordering example:


HD 100 AS A10-200 T12V LR SB
 ↳ Type
 ↳ Clamping force (N)
 ↳ Dual arm
 ↳ Piston Ø
 ↳ Clamp arm variants (Standard)
 ↳ Position sensing system at the front (T12H = at the rear)
 ↳ Right-hand air connection (LL = Left hand)
 ↳ Optional: Protective panel

Type	Clamping force at 5 bar (N)	Operating pressure with oil-free air (bar)	Maximum pressure with oil-free air (bar)	Mounting (G)	Opening and closing time (approx. sec.)	Weight ~ (kg)
HD 100 AS	20000	5	6	1/4	1	55,0

Subject to technical modifications.

CLAMPING

Electric Clamps





Electric Clamps

24V DC electric series

Electric clamps are compatible alternatives to pneumatic clamps. Prompted by the safety concept in factories, they are powered by a conventional direct current motor with extra-low voltage protection. In combination with an exceptionally robust trapezoidal thread spindle, the electrically-driven clamp, with virtually similar dimensions, is an extremely compact and, at the same time, robust equivalent to the current compressed air standard.

System configuration – Electric clamps





TM 8 stand-alone motor control panel to drive up to 8 clamps, together with position sensing with 8 component sensors

Electric clamps with energy saving potential

The table below shows the energy consumption of a standard pneumatic clamp with a cylinder diameter of 50 mm, compared with its electrically-driven equivalent.

The basis is a clamp with a throat depth of 100 mm, an operating pressure of 6 bar and a 3-metre compressed air hose with an inside diameter of 10 mm.

The table shows the values for energy consumption, CO2 emissions and the operating costs for 1,000 cycles per day, per year and over a project duration of 8 cycles.

Comparison between pneumatic and electric clamps

50er Series; 135° Opening angle	Pneumatic clamp (V)	Electrically-driven clamp (EK)
	Single clamp	Single clamp
Energy consumption (at 6 bar)	[l]	[kWh]
Energy consumption (l or kWh) (cycle)	1,71	0,00003
Energy consumption (cycle) clamping station incl. compressed air feed hose (3m) >> 1,8 l	3,52	/
Energy consumption (0,13 kWh/m³)	[kWh]	[kWh]
per day (1.000 cycles per day)	0,46	0,03
per year (250 day)	114	7,50
during the project (8 year)	915	60
CO2 emissions (600 g/kWh)	[kg]	[kg]
per day (1.000 cycles per day)	0,27	0,02
per year (250 day)	69	4,5
during the project (8 year)	549	36




-
- EK...**
- max. 135°
- Angular tolerance of +10° to A
- max. 70°
- EK2...**
- max. 70°
- Without clamp arm: A00

Tünkers drive variants required for operation.

Subject to technical modifications.

CLAMPING

Pin Clamps





Pin Clamps


Competence with Underbody Clamping Technology

Hook clamps, UZ clamps or underbody clamps – many terms are used to describe this special clamping technology, particularly when used for clamping the complete underbody subassembly. In this case, the components are usually positioned on four to eight underbody clamps with the aid of a centring pin and clamped by means of a centring pin located in the hook. With this integrated configuration, in which the two functions – clamping and centring – are combined in one product, underbody clamps are also suitable for use as compact gripping tools in robotic gripper systems. For the reproducible clamping of high-strength steels and aluminum components, we can devise special underbody clamping concepts with compatible, surface-treated centring pins.

Greater flexibility with the ALPHA curve-driven mechanism

- The ALPHA curve-driven mechanism compensates variations in the part (e.g. in the case of casting materials) and is also suitable for clamping multiple models, with the cycling function (3 mm and higher).
- Clamping hook motion with optimum displacement profile, e.g. in the case of collar punches.
- Oblong-section cylinder for a totally slim tool profile.
- Locking solutions:
 - a. Mechanical braking system for a secure stop position of the clamped setting
 - b. Pneumatic back-pressure valve, which retains the air in the cylinder in the event of a loss of pressure.


APH-pin clamps with 3 mm power stroke

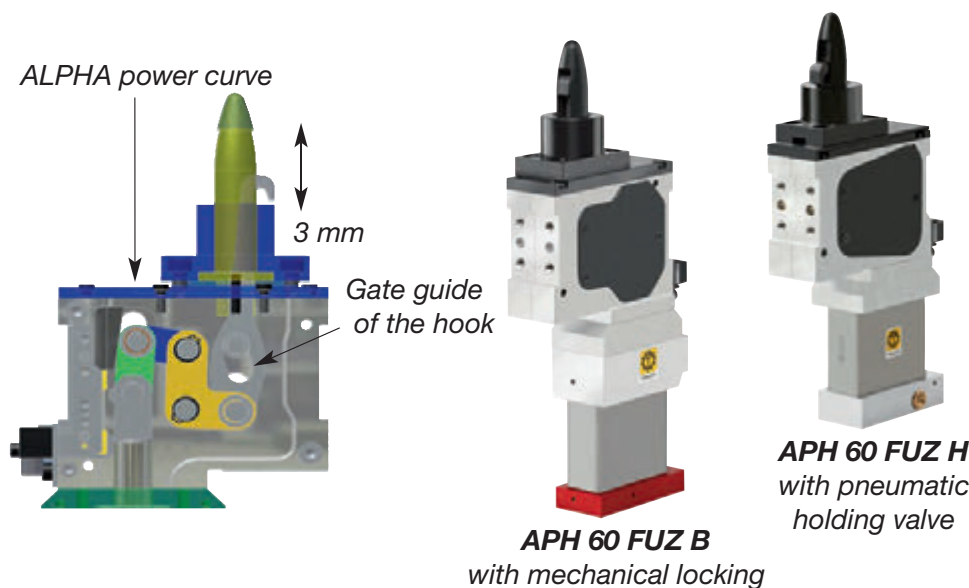


Typical applications



Underbody clamp for mounting the floor after the roller conveyor has been lowered

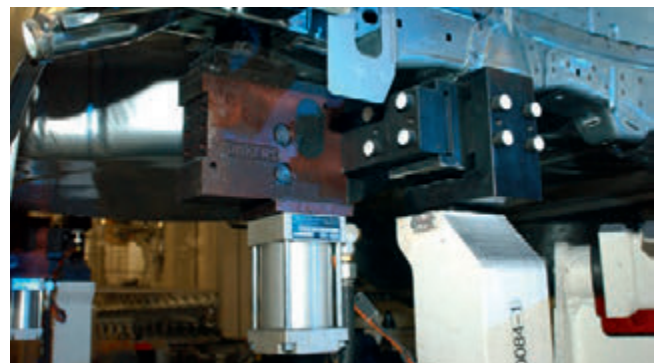

Underbody clamp with fitted and positioned floor assembly


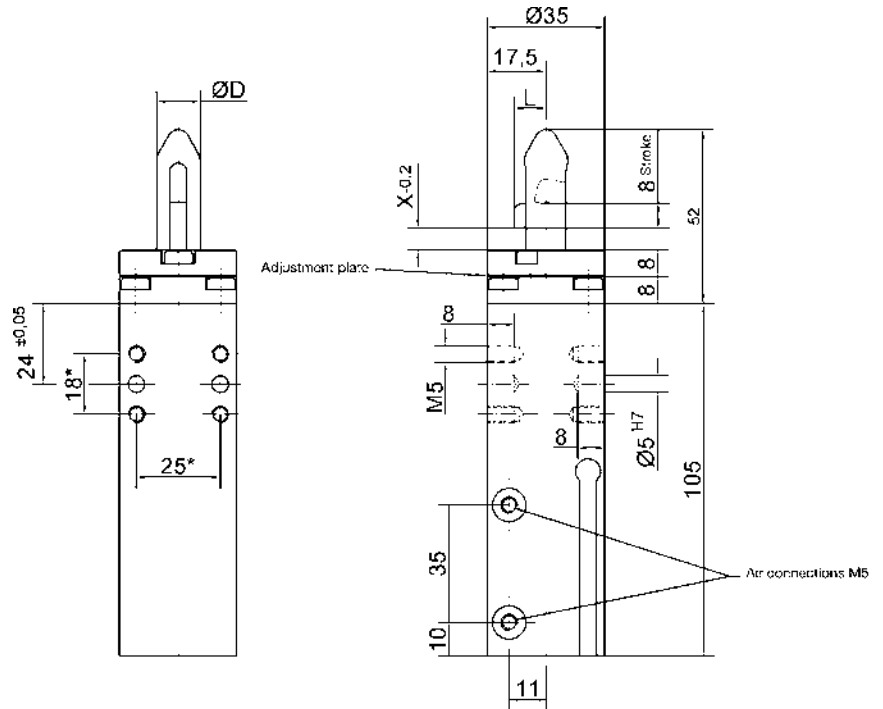


- Underbody clamp for centring and clamping in workpiece opening
- Centring fitting produced to specifications, with a diameter of 10 to 16 mm
- Clamping hooks with gate guide, powered by the pneumatic cylinder integral with the housing
- Enclosed housing, made of aluminum and with mounting hole patterns on the right and left sides

Optional:

- Position sensing (weld-resistant for the closed and open positions (T23))

Geometrical shapes of the centring pins

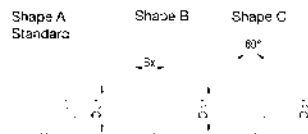

Ordering example:

K 25 UZ T23 A 13 1,5
 ↳ Type ↳ Position sensing system ↳ Pin shape ↳ Pin diameter 'D' ↳ Plate thickness 'X'

Order code TUNKERS position sensing systems:

...T23 Magnetic position sensing, incl. 2 magnetic switches mounted on the clamp


Type	Max. holding force (N)	Clamping force (N)	Weight (kg)
K 25 UZ	160	160	0,9

Subject to technical modifications.



Pin Clamp K 32 UZ


CLAMPING

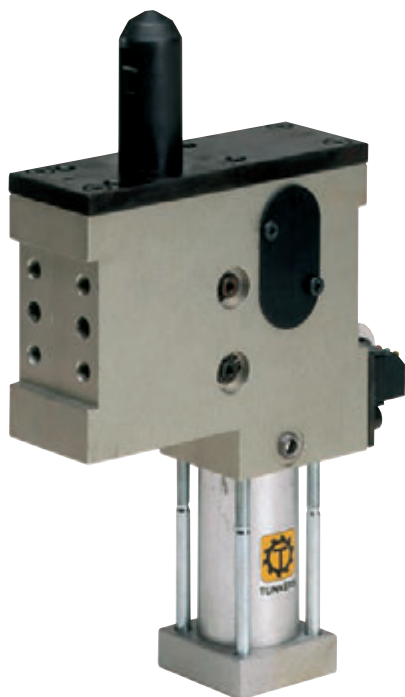

- Underbody clamp for centring and clamping in workpiece opening
- Centring pin with a diameter of 20 to 40 mm
- Clamping hook powered by the pneumatic cylinder by means of a knee-lever mechanism
- Enclosed housing, made of aluminum and with mounting hole patterns on the right and left sides

Optional:

- Inductive sensing (weld-resistant for the closed and open positions (T12))

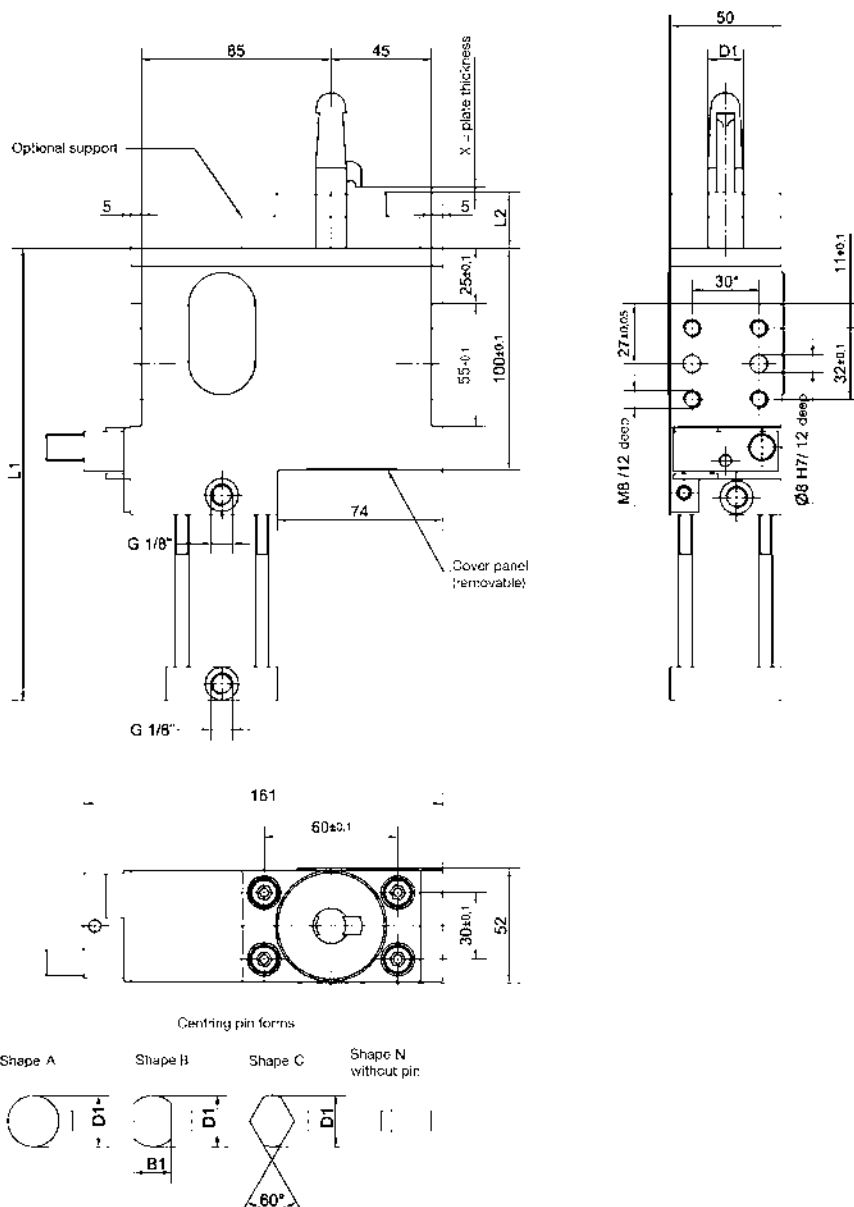

Typical sensing mechanism:

K 32 UZ A 30 45 T12 X=4,2

→ Type
→ Centring pin variants
→ Pin diameter D1
→ Support height L2
→ Position sensing system
→ Plate thickness X

Order code TÜNKERS position sensing systems:

...T00 without position sensing

...T12 24 V inductive position sensing, 1 output with integral LEDs

Type	Max. holding force (N)	Clamping force at 6 bar (N)	Weight (kg)	L1
K 32 UZ	2500	1800	2,4	203




Subject to technical modifications.




- Underbody clamp for centring and clamping in workpiece opening
- Centring fitting produced to specifications, with a diameter of 15 to 40 mm
- Single or dual clamping hook with gate guide, powered by pneumatic cylinder integral with the housing
- Enclosed housing, made of aluminum and with mounting hole patterns on the right and left sides

Optional:

- Inductive sensing (weld-resistant for the closed and open positions (T12))
- Locking unit for locking the clamping position in the open and closed position

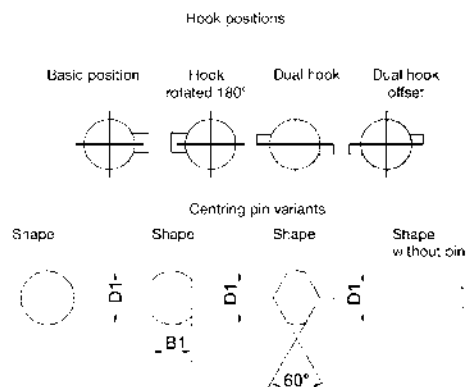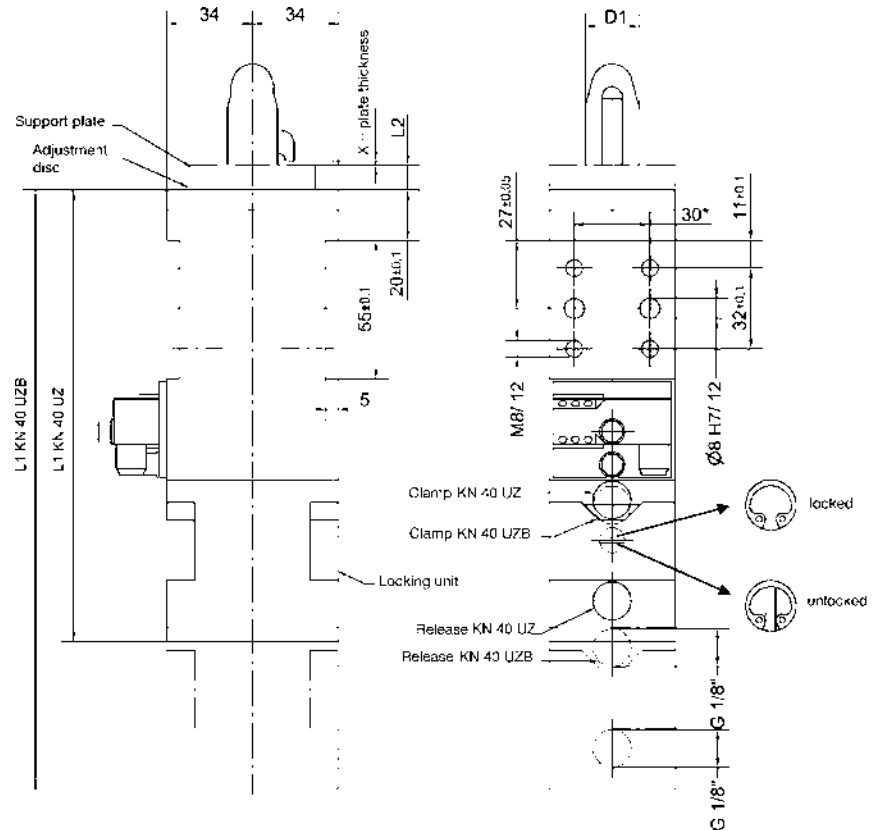

Typical sensing mechanism:

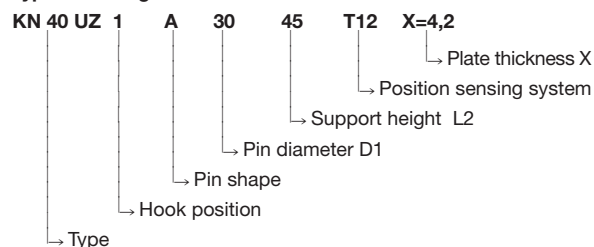

Order code TUNKERS position sensing systems:

...T00 without position sensing

...T12 24 V inductive position sensing, 1 output with integral LEDs

Type	Max. holding force (N)	Clamping force (N)	Weight (kg)	L1
KN 40 UZ	500	500	2,3	179
KN 40 UZB	1000	500	2,8	238

Subject to technical modifications.



Pin Clamp K 63 UZ


CLAMPING




- Underbody clamp for centring and clamping in workpiece opening
- Clamping function with plate thickness compensation
- Centring pin with a diameter of 20 to 40 mm
- Single or dual clamping hook with gate guide, powered by pneumatic cylinder integral with the housing
- Enclosed housing, made of aluminum and with mounting hole patterns on the right and left sides

Optional:

- Inductive sensing (weld-resistant for the closed and open positions (T12))
- H: Pneumatic self-locking
- B: Mechanical piston rod locking

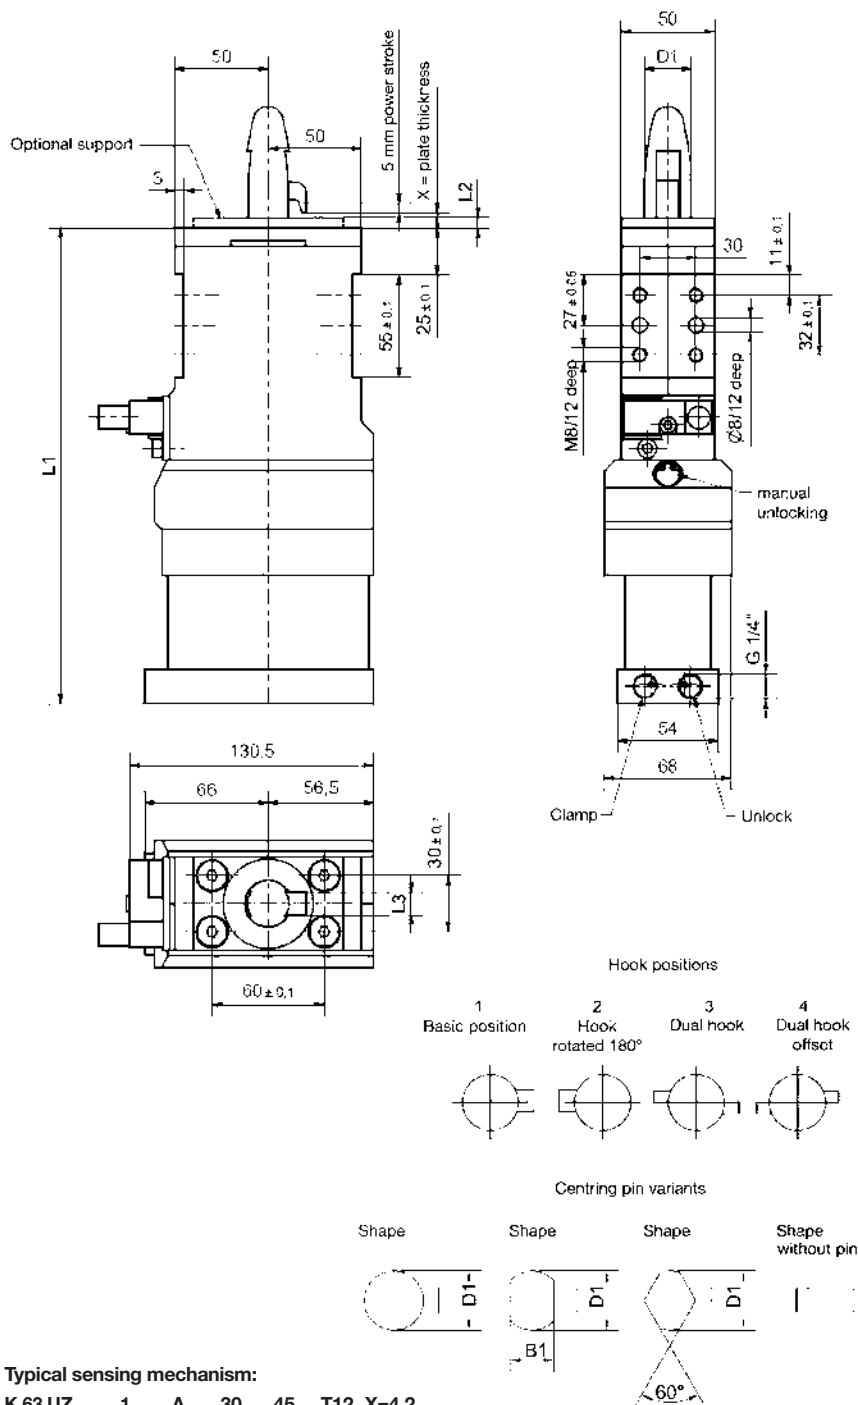

Typical sensing mechanism:


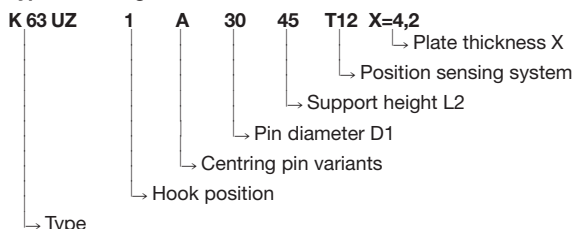


Order code TÜNKERS position sensing system:

...T00 without position sensing
...T12 24 V inductive position sensing, 1 output with integral LEDs

Type	Max. holding force (N)	Clamping force (N)	Weight (kg)	L1
K 63 UZ	1200	1200	4,2	208
K 63 UZB	1200	1200	4,8	254
K 63 UZH	1200	1200	4,4	218

Subject to technical modifications.

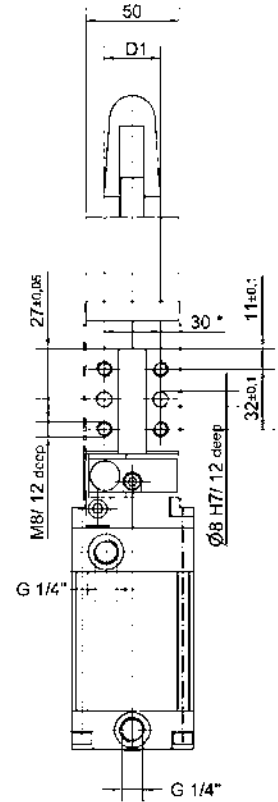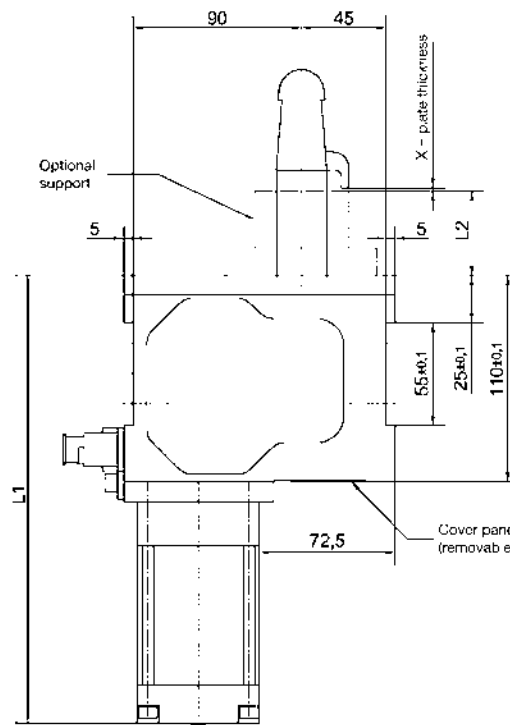

- Underbody clamp for centring and clamping in workpiece opening
- Centring pin with a diameter of 20 to 40 mm
- Clamping hook powered by the pneumatic cylinder by means of a knee-lever mechanism
- Enclosed housing, made of aluminum and with mounting hole patterns on the right and left sides


Optional:

- Inductive sensing (weld-resistant for the closed and open positions (T12))


Hook positions
1
Basic position



Centring pin variants

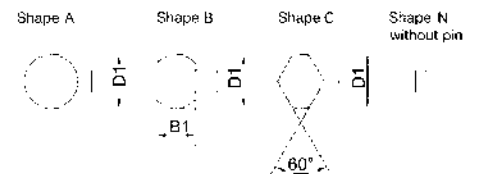

Typical sensing mechanism:

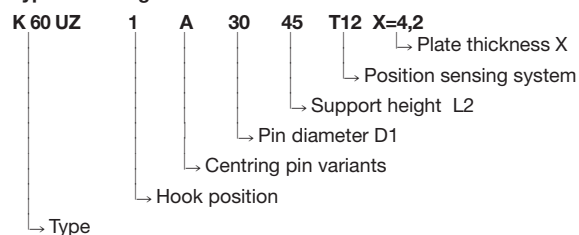

Order code TÜNKERS position sensing system:

...T00 without position sensing system
...T12 24 V inductive position sensing, 1 output with integral LEDs

Type	Max. holding force (N)	Clamping force (N) at 6 bar	Weight (kg)	L1
K 60 UZ	3800	3300	5,2	238

Subject to technical modifications.




Pin Clamp APH 60 FUZ...


CLAMPING



- Underbody clamp for centring and clamping in workpiece opening
- Applied force retention with 3 mm power stroke
- Enclosed housing, made of aluminum and with mounting hole patterns on the right and left sides
- Inductive sensing (weld-resistant for the open and closed positions (T12))
- Optional mechanical locking (B) or pneumatic self-locking (H)

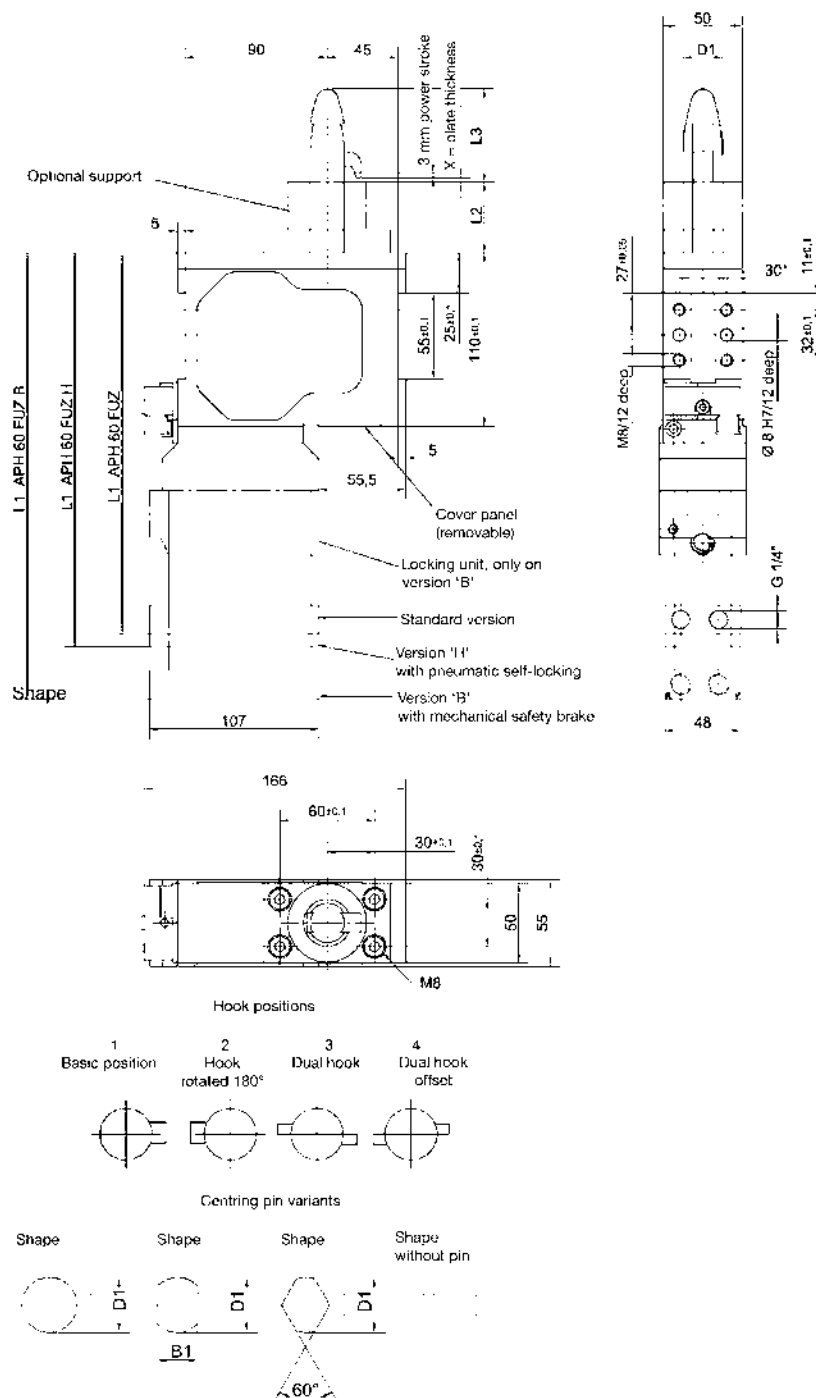

Typical sensing mechanism:

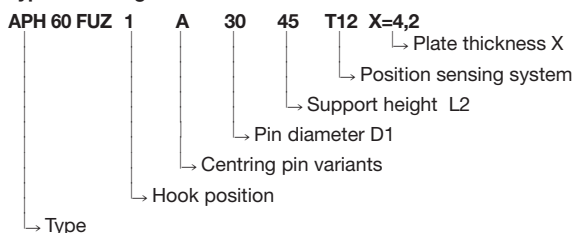

Type	Clamping force at 6 bar (N)	Max. holding force (N)	Dimensions (l x w x d) (mm)	Weight (kg)
APH 60 FUZ	2800	2800	235x145x50	4,6
APH 60 FUZH	2800	2800	283x145x50	4,8
APH 60 FUZB	2800	2800	243x145x50	4,6


Order code TÜNKERS position sensing system:

- ...T00 without position sensing system
- ...T12 24 V inductive position sensing, 1 output with integral LEDs

Subject to technical modifications.



- Underbody clamp for centring and clamping in workpiece opening
- Additional lowering function for the centring pin, in order to release the workpiece prior to removal
- With lighter-weight materials such as aluminum, distortion is prevented when the workpiece is lifted out
- Power supplied to the clamp hook and lowering/with drawing function via a separate pneumatic cylinder
- Optionally with one or two clamping hooks
- 15 to 35 mm dia. centring pin
- Inductive sensing for every working position

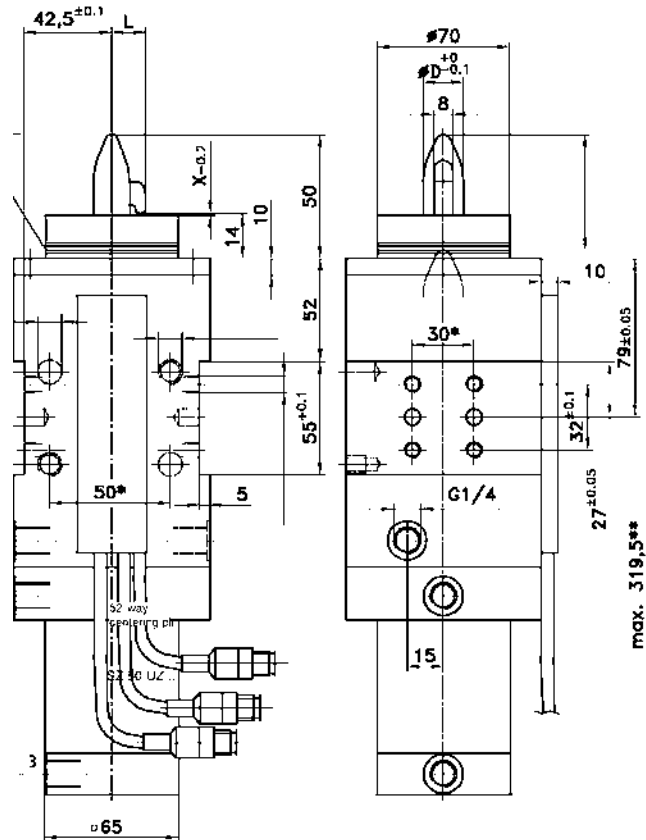


Basic position:
Clamping hook retracted
and centring pin lowered
Option: 50 mm stroke

Basic position:
Clamping hook retracted
and centring pin lowered
Option: 25 mm stroke


Intermediate position:
Clamping hook retracted
Centring pin extended

End position:
Clamping hook locked
Centring pin extended

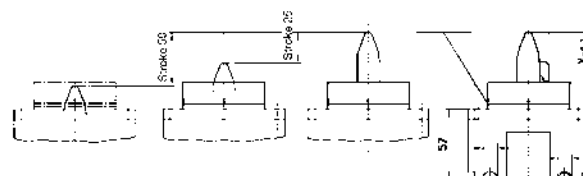

Stroke centring pin:
Option: 50 mm Standard: 25 mm

Please note:
Since, with a 50 mm stroke, the pin is fully inserted into the housing, these stroke lengths are not suitable for applications subject to scaling.



Typical sensing mechanism:

SZ 50 UZ 25 T31 D X
 ↳ Type ↳ Stroke (Option: 50 mm) ↳ Position sensing system ↳ Pin diameter ↳ Material thickness

Order code, TÜNKERS position sensing system:
 ...T31 Inductive sensing, 3 outputs


Type	Clamping force at 6 bar (N)	Max. holding force (N)	Dimensions (l x w x d) (mm)	Weight (kg)
SZ 50 UZ	3000	3800	319,5x95x95	7,5

Subject to technical modifications.



Pin Clamp K 60 U

CLAMPING

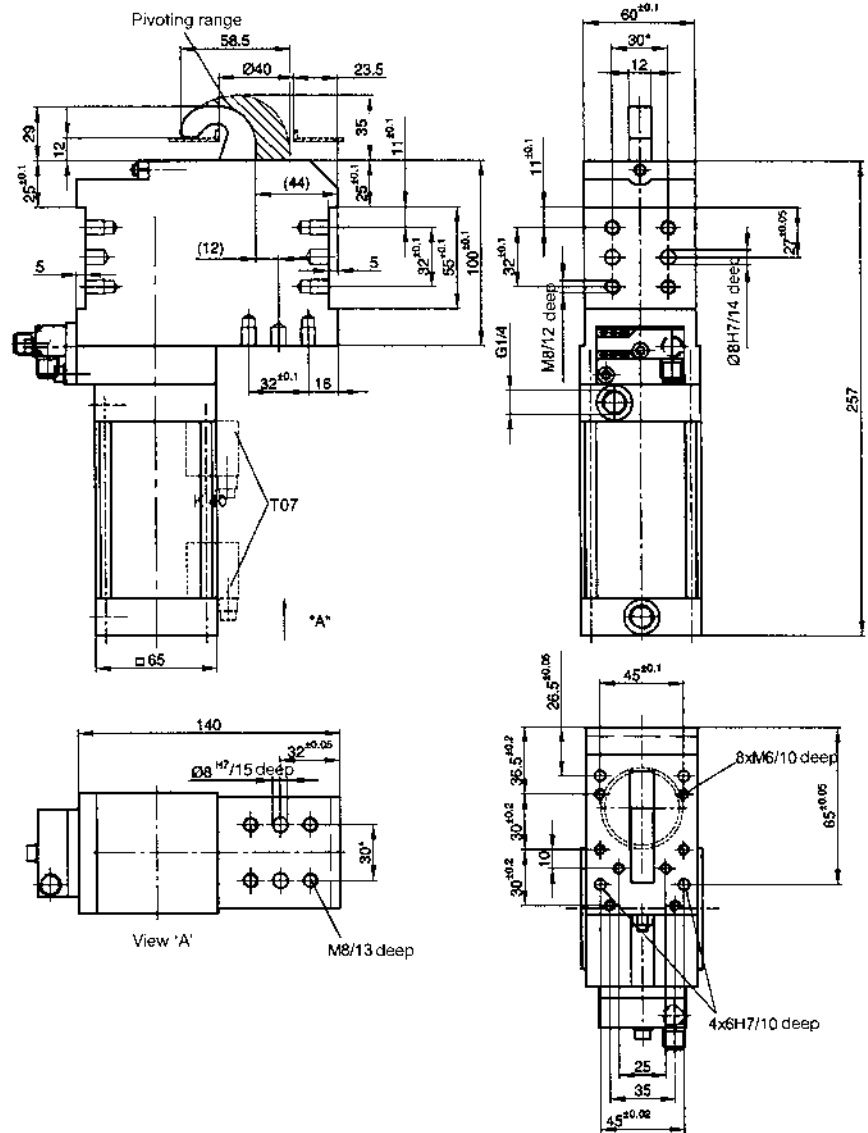


- Underbody clamp with fully-retractable clamping hooks for clamping in component opening
- Clamping hook powered by a pneumatic cylinder acting on the knee-lever mechanism
- Over-centre position locked
- Enclosed housing in the aluminum version, with mounting hole patterns on the right and left sides

Optional:

- Inductive sensing (weld-resistant for the closed and open positions (T12))

Typical sensing mechanism:



Order code TÜNKERS position sensing systems:


...T12 24 V inductive position sensing, 1 output with integral LEDs

Type	Clamping force at 6 bar (N)	Holding force (N)	Operating pressure (bar)	Piston diameter (mm)	Weight (kg)
K 60 U	3300	3300	max. 8	60	3,5

Subject to technical modifications.

CLAMPING

Swivel Units





Swivel Units


CLAMPING



The clamp arm or gripper arm of the pivoting clamp is attached directly to the piston rod of the dual-acting pneumatic cylinder. With the stroke movement, the piston rod is rotated by 90° into a gate guide. The clamp arm moves by a corresponding distance from the clamping position and releases the workpiece. Space-saving clamping concept with low mounting height. The clamping force corresponds to the cylinder force. By virtue of the centralised location of the piston rod, the maximum possible length of the clamp arm is limited. The pneumatic pivoting clamp is available as a modular unit and screw-in version.

System configuration

Standard arms, with and without hole pattern

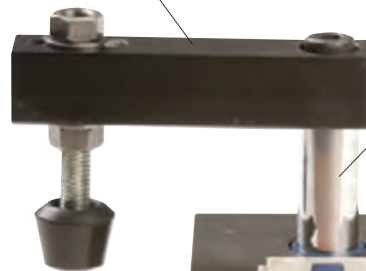

Piston rod with gate guide in the cylinder chamber

Piston with seal



Attachment hole patterns on multiple sides

Enclosed housing made from aluminum material

Alternative versions



TÜNKERS Swivel Units are available in two versions:

Screw-in version

Housing with external thread for insertion into the corresponding circular opening in a mounting plate.



Modular unit

For screwing onto brackets or plates by means of the specified mounting hole pattern.



Product range

Type						
Clamping force (N)	170	200	350	600	1000	1600
Stroke (mm)	25	27	30	30	32	30
Locking	No	No	No	No	No	No
Weight (kg)	0,6	0,8	1	1,2	1,46	1,66
Dimensions SCB (mm)	145x35x35	125x55x35	145x60x45	145x70x55	162x85x65	162x100x80
Dimensions SCT (mm)	–	118x40	132x48	135x58	145x63	152x77



A vertical industrial machine, likely a press or punch, with a black handle on top and a yellow logo on the front. The machine is white with a black handle and a yellow logo. The logo features a stylized gear or 'G' shape with the word 'TUNABYTE' underneath. The machine has a rectangular body with several screws on the side. A black cable is visible at the bottom right.

- Optional:
- Magnetic position sensing

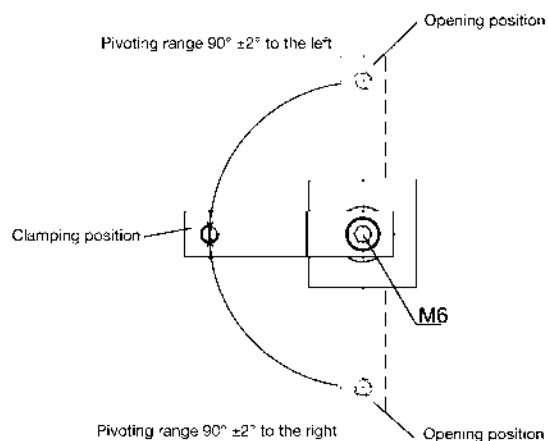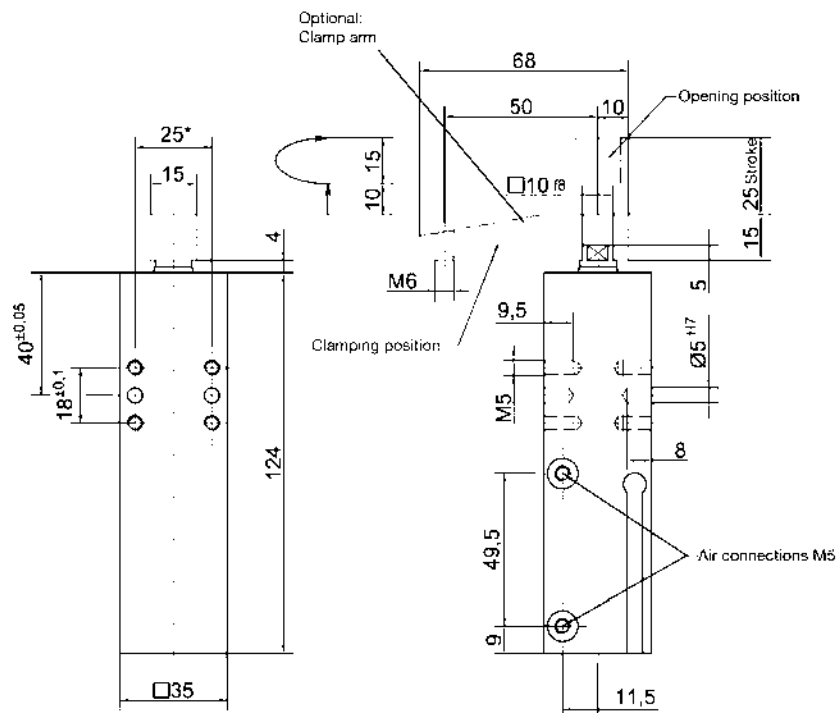

Type	Clamping force at 5 bar rod extended (N)	Clamping force at 5 bar rod retracted (N)	Weight inkl. Clamp arm (kg)
SCBM 25-25	220	170	0,6

Ordering example:

SCBM 25-25

90° L T03

- ↳ Position sensing system

→ Direction of rotation left (R = right)



→ Type



- Screw-in version
- Optional right-hand or left-hand pivoting
- 90° pivoting range
- Aluminum basic enclosure with integral pneumatic cylinder and pivoting mechanism
- Attachment by external thread
- adapter for mounting the clamp arm

Optional:

- Clamp arms:
refer to 'Accessories'

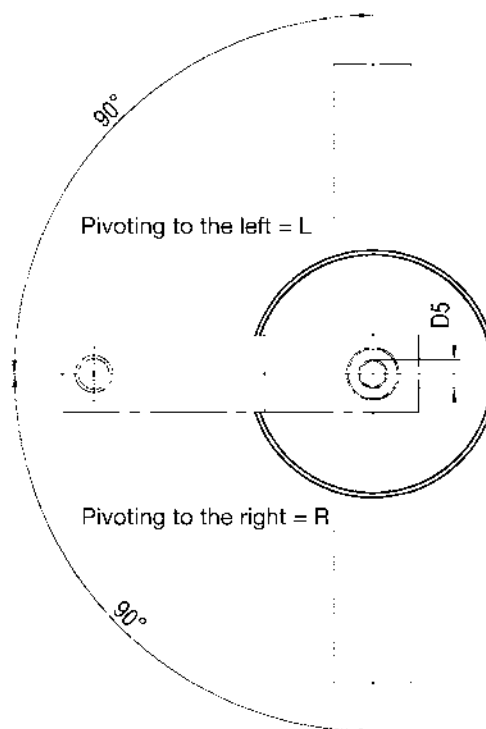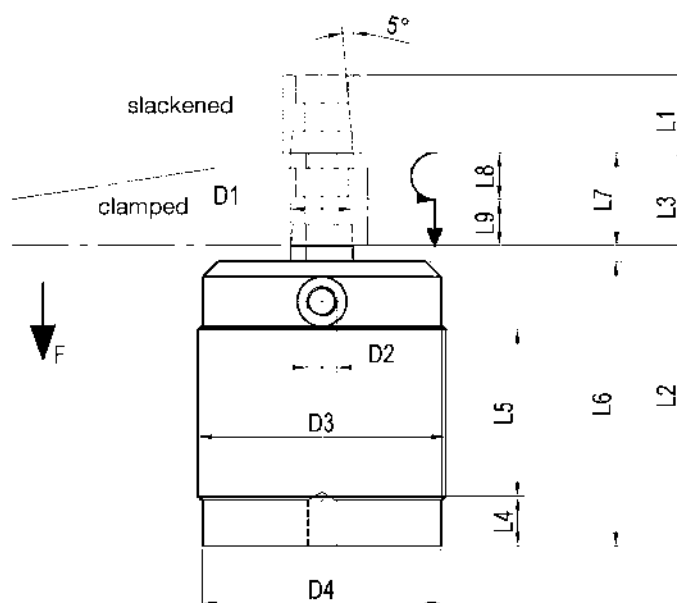

Type	Total stroke (mm)	Dependent on piston diameter (mm)	Weight (kg)	Force (F) (kN)
SCT 25	28	25	0,660	0,2
SCT 32	30	32	0,90	0,35
SCT 40	29	40	0,970	0,6
SCT 50	28	50	1,230	1,0
SCT 63	30	63	1,430	1,6

Ordering example:

SCT 25 R
 ↳ Right pivoting
 ↳ Piston Ø
 ↳ Type

Accessories:

Clamp arm, keyway nut, threaded flange and adapter

R – Right pivoting
L – Left pivoting

Type	D1	D2	D3	D4	D5	L1	L2	L3	L4	L5	L6	L7	L8	L9
SCT 25	14	M5	M40x1,5	39,5	M9	28	74	16	3	43	70	28	14	14
SCT 32	16	G1/8	M50x1,5	47,5	M8	30	83	19	3	55	79	30	16	14
SCT 40	16	G1/8	M55x1,5	57,5	M8	29	87	19	3	59	83	29	15	14
SCT 50	20	G1/8	M65x1,5	62,5	M10	28	92	25	3	63	87	28	14	14
SCT 63	20	G1/8	M80x1,5	77	M10	30	97	25	3	66	92	30	15	15

Subject to technical modifications.




Pivoting Clamp SCB...



- Modular construction
- 90° pivoting range
- Optional right-hand or left-hand pivoting
- Aluminum basic enclosure with integrated pneumatic cylinder and pivoting mechanism
- Attachment options on multiple sides
- Tapered adapter for mounting the clamp arms

Optional:

- Magnetic piston for external position sensing
- External magnetic switch
- Clamp arms: refer to 'Accessories'

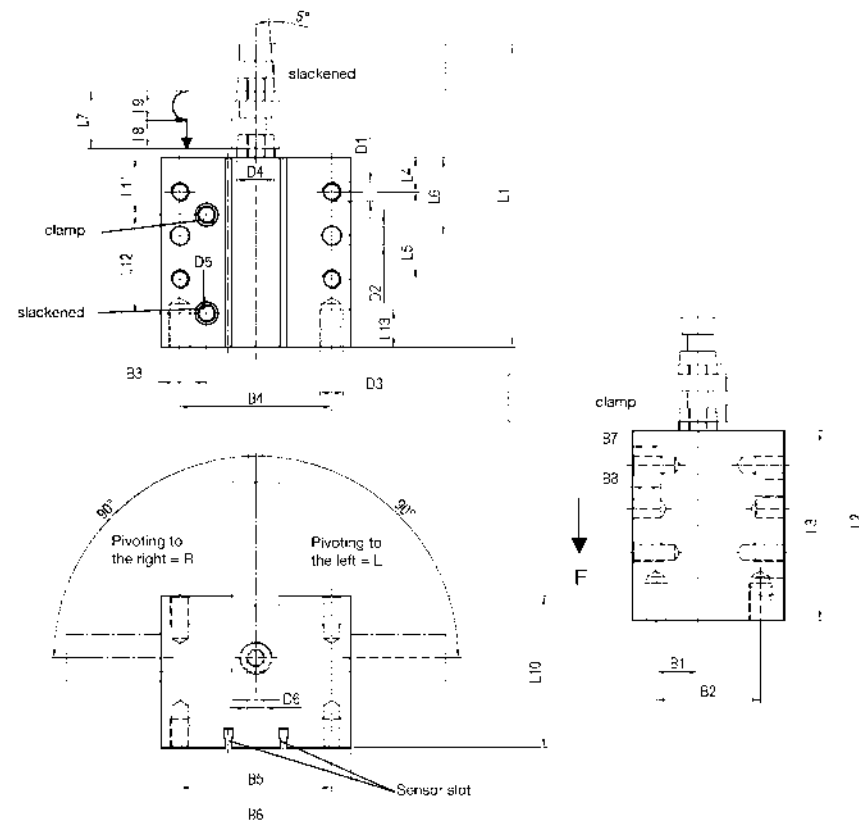

Ordering example:

SCB 25 R T07
 ↳ Type ↳ Piston Ø ↳ Right pivoting ↳ Position sensing system

Order code TÜNKERS position sensing systems:

- ...T00 without position sensing
- ...T07 Magnetic piston for end position sensor

Accessories:

Clamp arm, keyway nut, threaded flange and adapter

R – Right pivoting
 L – Left pivoting

Type	Total stroke (mm)	Dependent on piston diameter (mm)	Weight (kg)	Force (F) (kN)
SCB 25	27	25	0,825	0,2
SCB 32	30	32	1,066	0,35
SCB 40	30	40	1,216	0,6
SCB 50	32	50	1,462	1
SCB 63	30	63	1,662	1,6



Type	B1	B2	B3	B4	B5	B6	B7	B8	D1	D2 h7	D3	D4	D5	D6	L1	L2	L3	L4	L5	L6	L7	L8	L9
SCB 25	8	20	17	40	40	55	10	10	M8	6	M8	14	M5	M8	125	82	78	15	30	30	27	14	13
SCB 32	12,5	30	18	45	45	60	15	15	M8	6	M8	16	G1/8	M8	145	95	90	20	30	35	30	14	16
SCB 40	15,5	37	21	52	52	70	15	15	M8	6	M8	16	G1/8	M8	145	95	90	20	30	35	30	15	15
SCB 50	21,5	46	26	66	66	85	20	15	M10	8	M10	20	G1/8	M10	162	105	100	20	40	40	32	15	17
SCB 63	28	60	30	80	80	100	20	15	M10	8	M10	20	G1/8	M10	162	105	100	20	40	40	30	15	15

Type	L10	L11	L12	L13
SCB 25	35	16,5	44,5	15
SCB 32	45	18,5	51	20
SCB 40	55	17	52	20
SCB 50	65	21	53	20
SCB 63	80	19,5	53	20

Subject to technical modifications.

Standard Clamp Arm

Material: High-strength aluminum alloy, Hart-coat®

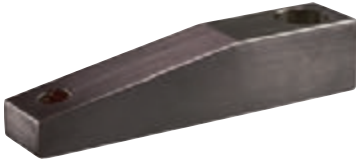


Special arms on request

Type	B1	B2	B3	L1	L2	Ø D1	Ø D2	Ø D3	D4	Weight (g)
PSZS 25	66	6	50	16	6	14	9	14	M6	210
PSZS 32	80	9	60	19	7	14	9	16	M8	240
PSZS 40	90	9	70	19	7	14	9	16	M8	270
PSZS 50	105	10	80	25	9	17	11	20	M12	380
PSZS 63	115	10	90	25	9	17	11	20	M12	430

Clamp arm for attaching contour blocks

Material: Steel, burnished




Type	B1	B2 ±0.1	B3	B4 ±0.02	B5 ±0.1	L1	L2	Ø D1	Ø D2	Ø D3	D4 H7	D5
PSZSA 40	91	54	6	20	10	22	7	14	9	16	6	7
PSZSA 50/63	125	70	10	30	15	28	9	17	11	20	6	9

Adapter for clamp arm mounting

Material: Steel, burnished


Suitable for complete clamping fixtures



Type	B1	B2 ±0.1	B3	L1	L2	L3	L4	dia. D1	dia. D2
PSSA 25	50	38	25	24,5	12	28,5	25	5,5	M8
PSSA 32/40	60	45	30	29	18	33	30	7	M10
PSSA 50/63	65	48	32	32	18	36	32	9	M10

Threaded flange

For screw-in type pivoting clamps
Material: Steel, galvanised
Screw-in flange with four mounting holes
Secured with locknuts.




Type	B1	B2	B3	Ø D1	Ø D2	Weight (g)
PSZG 25	50	37	9	M40x1,5	5,5	80
PSZG 32	60	45	12	M50x1,5	6,5	100
PSZG 40	65	50	12	M55x1,5	6,5	120
PSZG 50	75	58	15	M65x1,5	8,5	150
PSZG 63	88	70	15	M80x1,5	8,5	200

Locknuts

For screw-in type pivoting clamps
Material: Steel, galvanised

For use with hook spanners.




Type	B1	B2	L1	Ø D1	Ø D2	Ø D3	Weight (g)
PSZK 25	7	8	3,3	49	56	M40x1,5	63
PSZK 32	8	8	3,8	60	68	M50x1,5	84
PSZK 40	8	8	3,8	67	75	M55x1,5	106
PSZK 50	11	9	4,3	76	85	M65x1,5	132
PSZK 63	11	10	4,3	91	100	M80x1,5	180

Subject to technical modifications.

CLAMPING

Manual Clamps






Manual Clamps

Secure clamping of car body components, for example, requires clamping forces of more than 200 to 400 N. Therefore, TÜNKERS professional manual clamps are based on automated clamping technology. They are characterised by an integrated knee-lever mechanism for transmitted power, together with exceptionally robust construction of the housing and the bearings. For this reason, TÜNKERS manual clamps are also suitable for use in series production applications.

System configuration

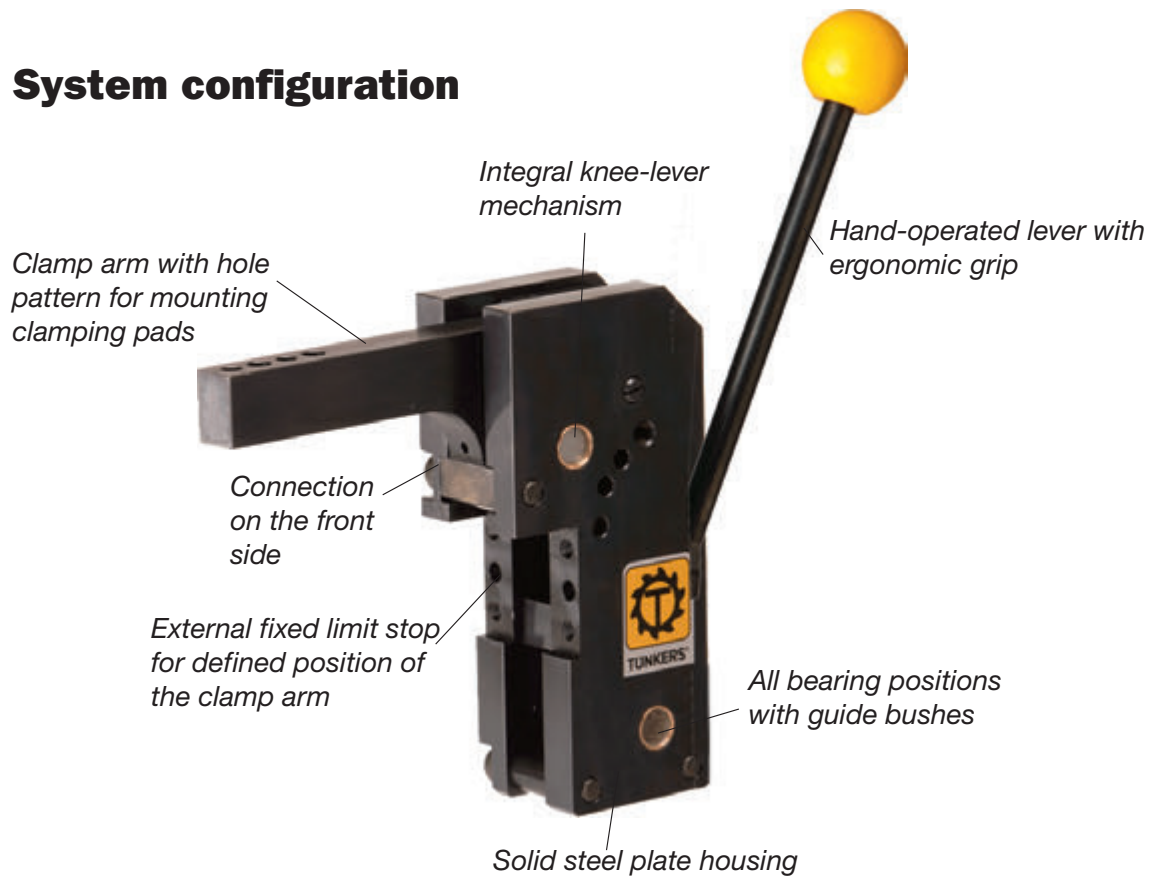

Typical applications




T5 Series Manual Clamp for prototype construction



HKC 40 Manual Clamp in clamping fixture



- Hand-operated clamp with integrated knee-lever mechanism and over-centre lock
- Clamp arm with fixed limit stop for reproducible end position
- Solid steel plate housing with hole pattern at the front
- All shafts in the mechanism inserted through bushes
- Hand-operated lever with ergonomic spherical knob
- Clamp arm with hole pattern for mounting contour blocks

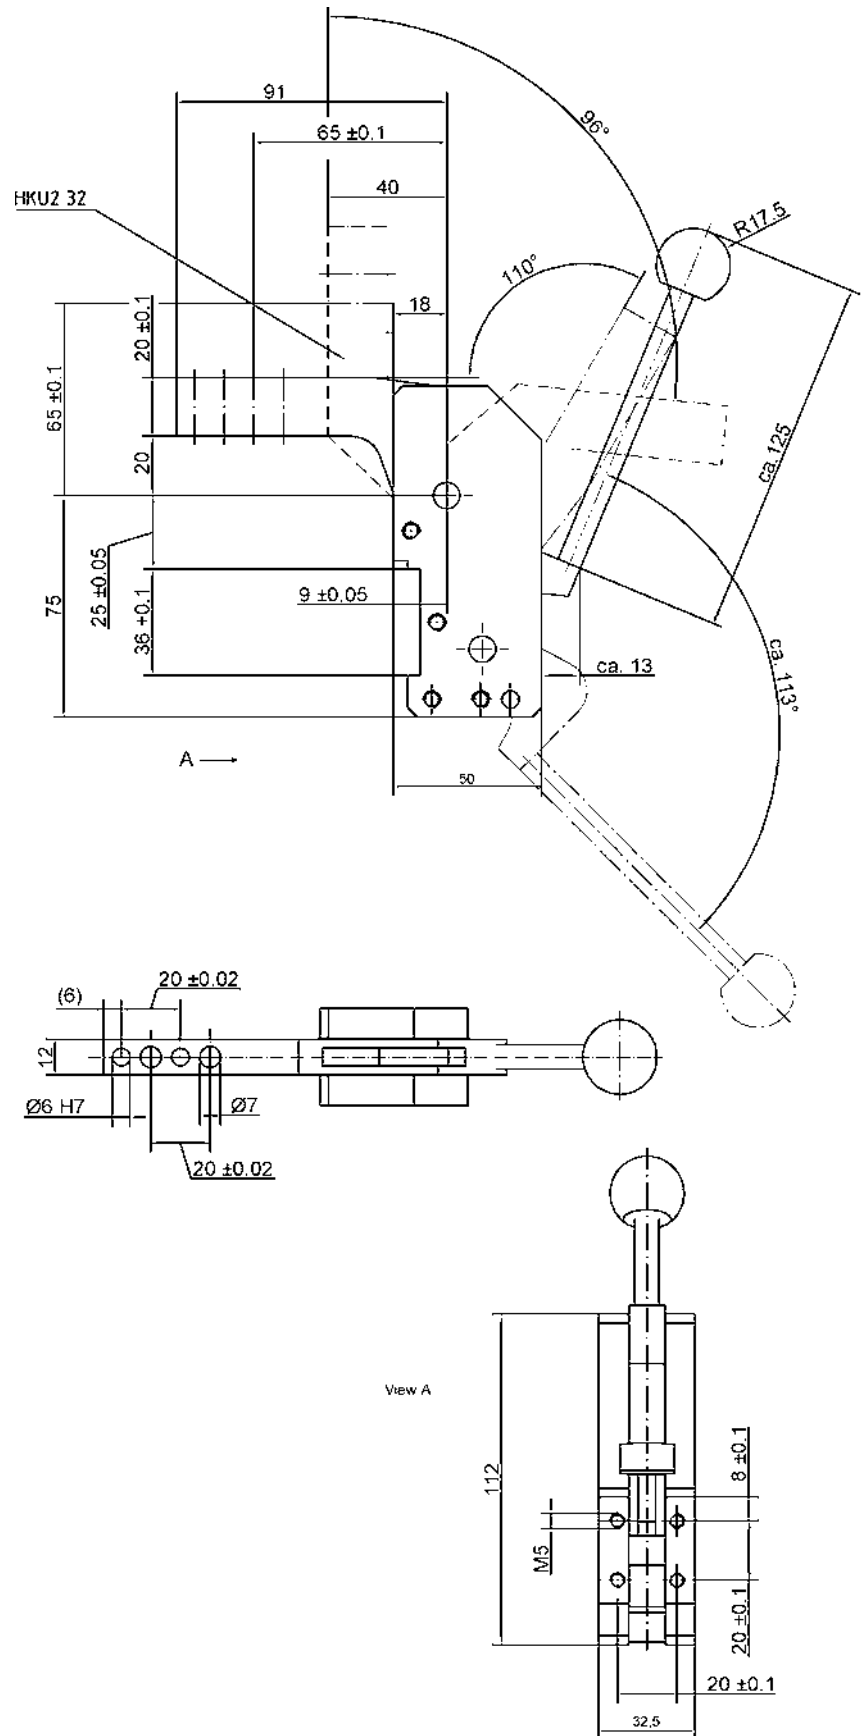

Type	Clamping torque (Nm)	Holding torque (Nm)	Weight (kg)
HKU/HKU2 32	55	110	1,25

Subject to technical modifications.

Ordering example:

HKU 32 110°
└─ Type └─ Opening angle



- [illegible]

Type	Clamping torque (Nm)	Holding torque (Nm)	Weight (kg)
HKC 40 B	160	320	3,5
HKC2 40 B	160	320	3.5

1 - 74 |


- [illegible]

Type	Clamping torque (Nm)	Holding torque (Nm)	Weight (kg)
HKC 50	160	320	3,2
HKC2 50	160	320	3.2

| 1 - 75



-



Ordering example:

HKU 63 RR 60°

└─ Opening angle

└─ Optional: End position detent on the right (RL= left)

└─ Type

-

Subject to technical modifications.



-

Type	Max. holding torque (Nm)	Clamping torque (Nm)	Dependent on Ø Piston (mm)	Weight (kg)
MK 50.1	800	160	50	5,8
MK 63.1	1500	380	63	7.9


Type	B24	B25	D1	D2 H7	D3	D4 H7	D5 H7	D6	L1	L2	L3	L4 ±0,1	L5 ±0,2	L6 ±0,05	L7 ±0,06	L8 ±0,1	L9 ±0,2	L10	L11	L12 ±0,05	L13*	L14 ±0,1	L15 N9
MK 50.1	30	74	M8	6	9	8	10	M10	218	178	35	28	51,5	36,5	55	11	32	20	68	55	45	10	12
MK 63.1	30	80	M8	6	9	8	10	M10	243	209	61	28	51,5	36,5	55	11	32	20	78	55	45	10	12

Type	L16 ±0,05	L17	L18 ±0,05	L19	L20	L21	S H9
MK 50.1	71,5	78	27	144	141,5	68	19
MK 63.1	71,5	86	27	144	141,5	86	22

1 - 78 |



- Hand-operated clamp with integrated knee-lever mechanism
- Component centred and clamped with clamping hooks
- Centring pin $\varnothing$ 20 to 40 mm as specified by the client
- Enclosed aluminum housing
- Hand-operated lever with ergonomic spherical knob
- Optional inductive sensing (weld-resistant for closed or open positions)

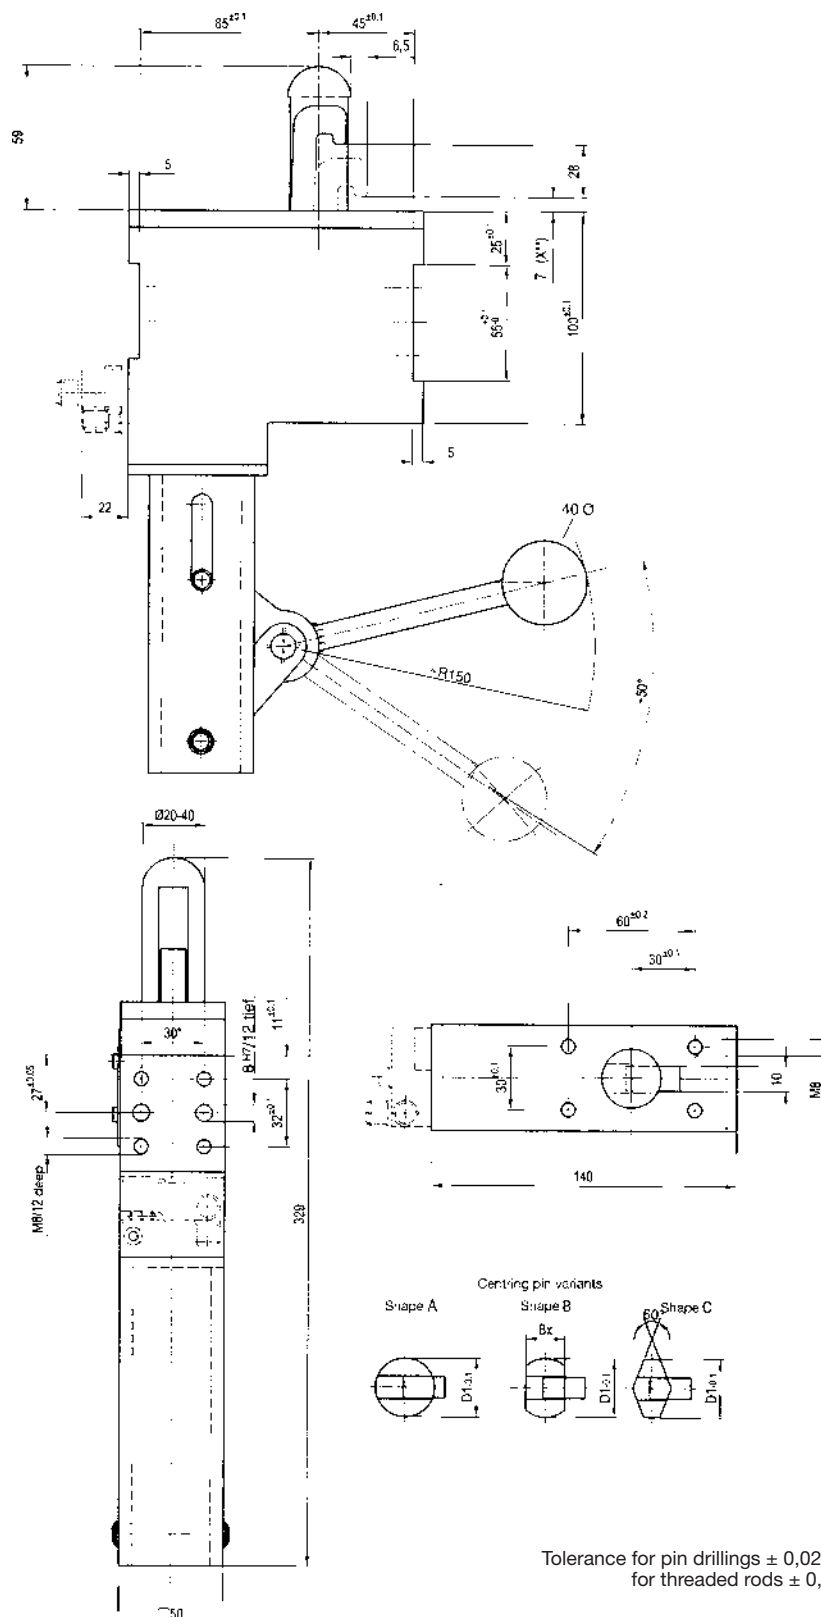

Type	D1/Bx
MK 32 UZ	20/16; 25/20; 30/22; 35/25; 40/28

Type	Max. holding force (N)	Clamping force (N)	Piston $\varnothing$ (mm)	Dimensions (mm)	Weight (kg)
MK 32 UZ	2500	1800	32	329x140x50	2,4

Subject to technical modifications.

Ordering example:

MK32 UZ A 30
MK32 UZ B 30/22

Pin size Dx, Bx
Pin shape
Type




Manual-Pin Clamp M 400 UZ

CLAMPING



- Hand-operated underbody clamp
- Variable hook position
- Hand-operated clamp with integral knee-lever mechanism and locked end position
- Component centred and clamped with clamping hooks
- Centring pin $\varnothing$ 10 to 25 mm as specified
- Enclosed aluminum housing
- Hand-operated lever with ergonomic handhold
- Optional position sensing (weld-resistant for open and closed positions (T23))

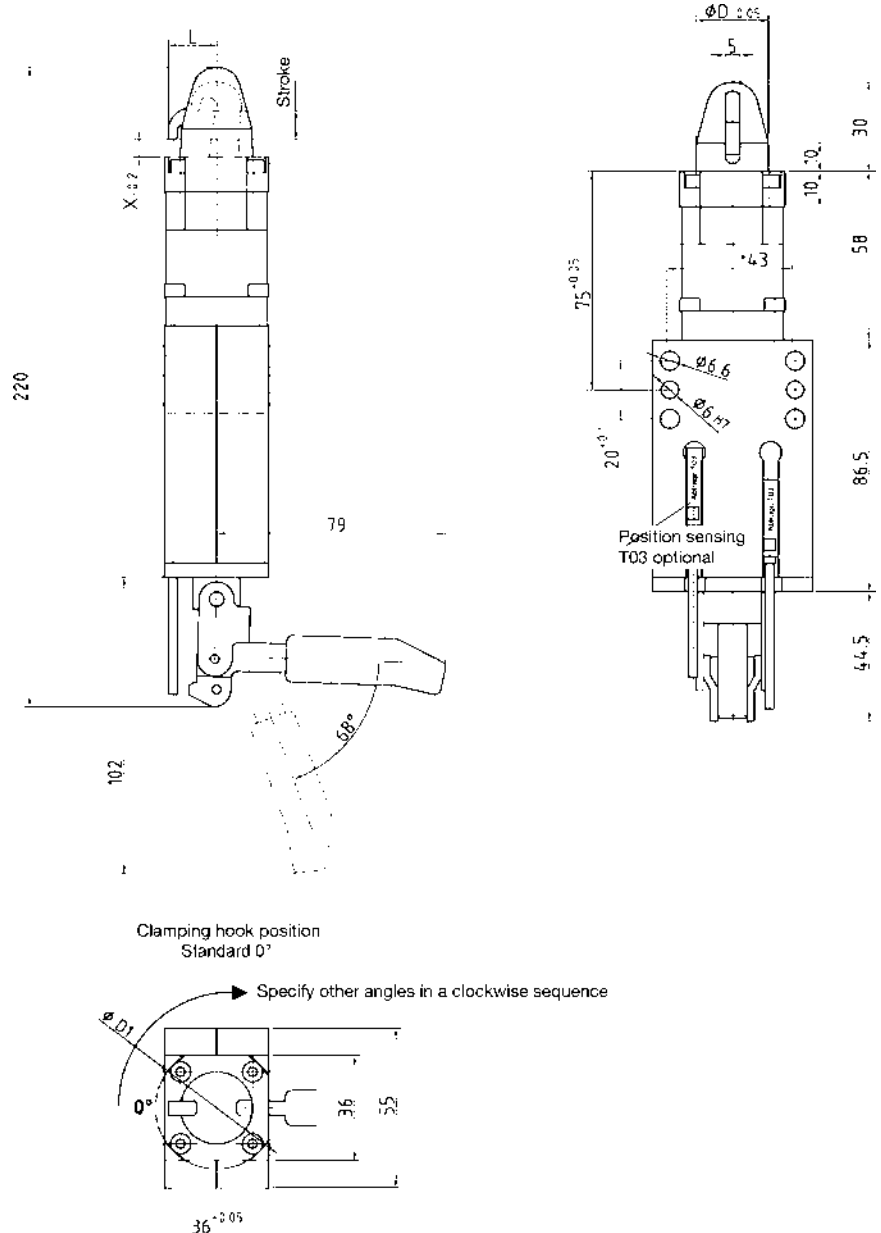

Order code, TUNKERS position sensing system:

- ...T00 without position sensing system
- ...T03 Magnetic position sensing, prepared for position sensing
- ...T23 magnet sensing, incl. 2 magnetic switches




Ordering example:

MK 400 UZ 12 1,5 T03 0°

- Type
- Pin $\varnothing$
- Plate thickness 'X'
- Position sensing system
- Clamping hook position (Standard)

Type	Max. holding force (N)	Clamping force (N)	Dimensions (mm)	Weight (kg)
M 400 UZ	1000	400	220x55x36	1,2

Subject to technical modifications.

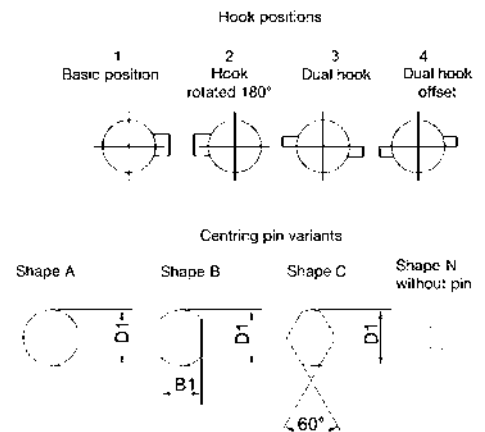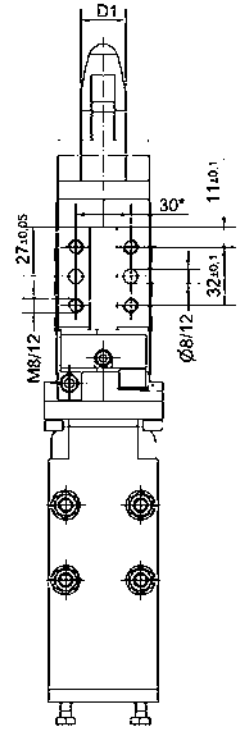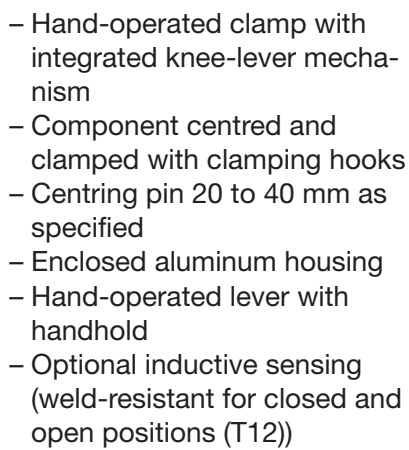

```

graph TD
    MK60_UZ[MK60 UZ] --> Type
    Type --> T12
    Type --> A
    T12 --> Position_sensing_system[Position sensing system]
    A --> Pin_shape[Pin shape]
    A --> Pin_size[Pin size]
    Pin_size --> 30
  
```

...T00 without position sensing
...T12 24 V inductive position sensing,
1 output with integral 3 LEDs, 4-pole

Subject to technical modifications.






Manual-Pin Clamp MK 60 U

CLAMPING



- Hand-operated clamp with integrated knee-lever mechanism
- Component clamped with clamping hooks
- Enclosed aluminum housing
- Hand-operated lever with handhold
- Optional inductive sensing (weld-resistant for closed and open positions (T12))

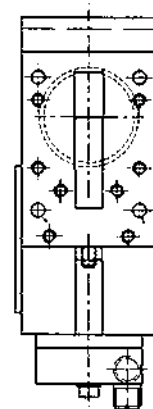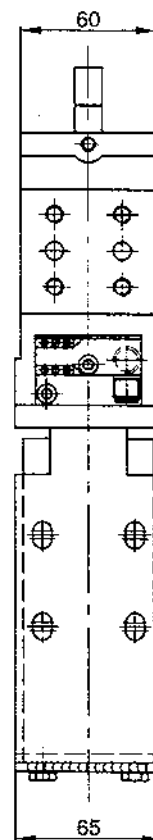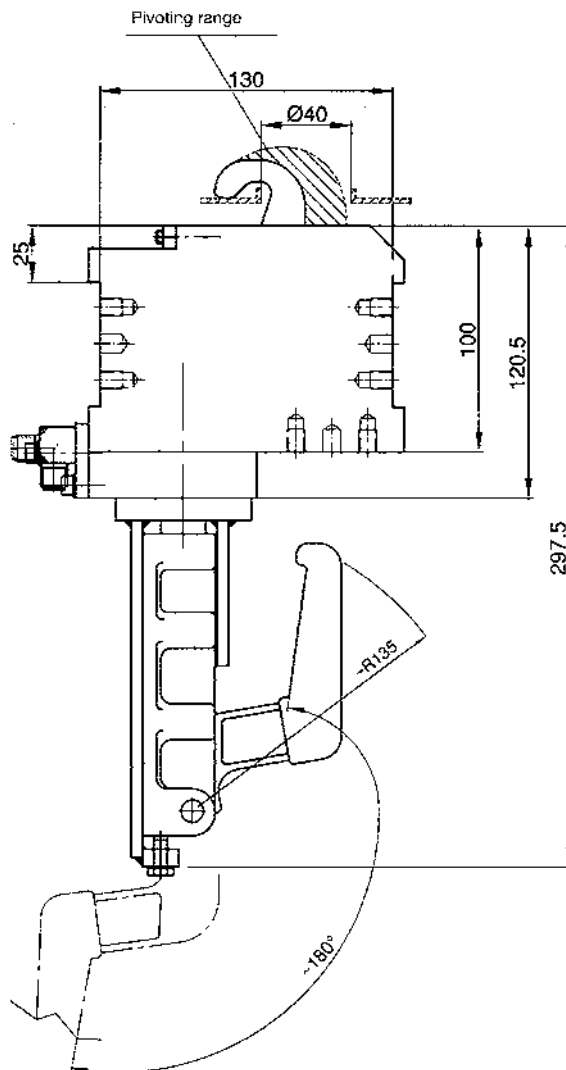

Ordering example:

MK60 U **T12** **A** **30**

→ Type → Position sensing system → Pin shape → Pin size

Order code TÜNKERS position sensing systems:


- ...T00 without position sensing
- ...T12 24 V inductive position sensing, 1 output with integral 3 LEDs, 4-pole

Type	Max. holding force (N)	Clamping force (N)	Weight (kg)	L1
MK 60 U	3300	3300	3,5	298

Subject to technical modifications.



- Pin extraction and positioning unit
- Standard mounting for centring pins
- Knee-lever mechanism, upper position over-centre point locked
- Enclosed aluminum housing with attachment options on multiple sides
- Hand-operated lever with ergonomic spherical knob
- Optional inductive sensing (weld-resistant for closed and open positions (T12))

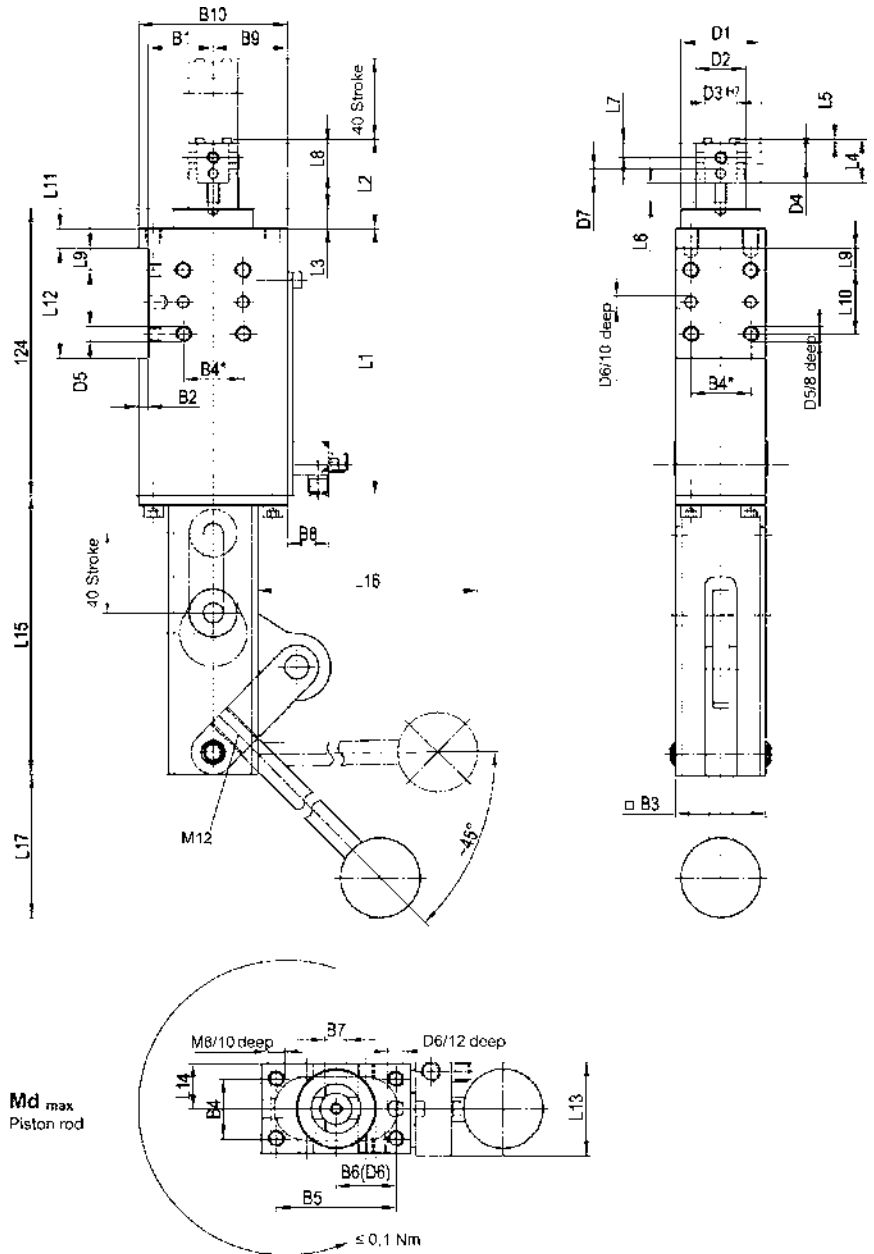

Type	Stroke (mm)	Max. static transverse force (N)	Dependent on piston Ø (mm)	Weight (kg)
MSZK 40	40	150	40	1,8

Available as an option:

...T12 Inductive sensing 24V, 1 output with integral LEDs

Type	B1 ±0,1	B2	B3	B4*	B5 ±0,2	B6 ±0,2	B7 +0,1/+0,05	B8	B9	B10	D1 f7	D2 f7	D3 H7	D4	D5	D6 H7	D7	D8	L1	L2	L3	L4	L5
MSZK 40	32,5	5	50	30	60	30	11	21	37,5	75	40	25	16	M6	M8	8	5	—	114	45	10	22	2

Type	L6	L7	L8	L9 ±0,1	L10 ±0,1	L11	L12 +0,1	L13	L14 +0,1	L15
MSZK 40	10	7,5	15,5	11	32	10	55	47	22,5	140

Subject to technical modifications.



- Pin extraction/positioning unit, manual operation
- Knee-lever mechanism, upper position over-centre point locked
- Standard mounting for centring pins
- Housing with lateral mounting hole pattern
- Hand-operated lever with ergonomic spherical knob

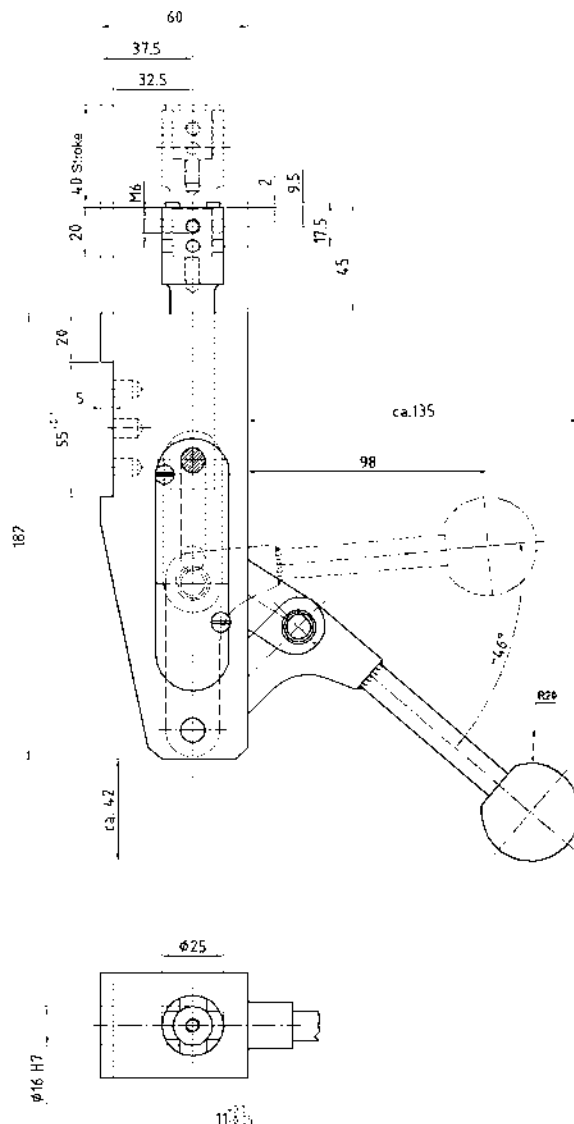
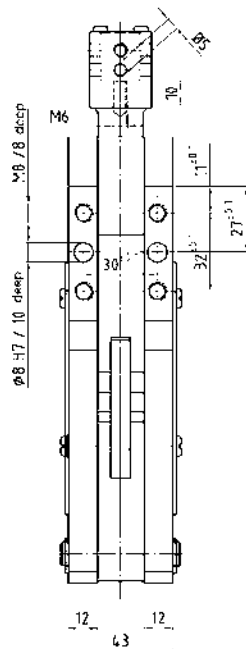


Diagram illustrating the 12-bit address structure:


- SZM 40**: Labeled "Type".
- A01**: Labeled "Adapter position".
- x40**: Labeled "Stroke".

Type	Stroke (mm)	Max. static transverse force (N)	Dependent on Ø Piston (N)	Weight ~ (kg)	Dimensions l x w x d (mm)
SZM 40	40	150	40	1.8	254x75x45

1 - 84 |

The manual clamps featured in this section of the catalogue have been specially designed for high-volume production in body assembly lines.

For clamping tasks without demanding requirements regarding clamping forces and idle times, we recommend our catalogue of hand-operated clamps, which also includes fabricated steel versions.

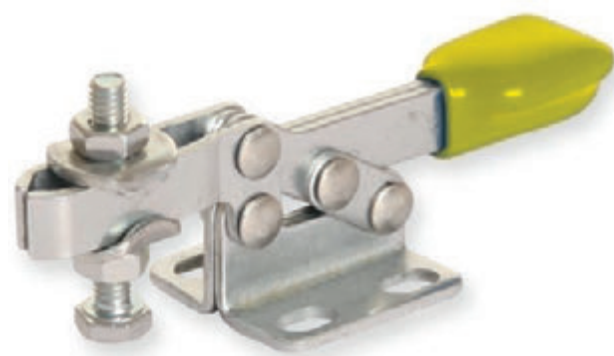



Positioning/Clamping Cylinders

In addition to clamping tasks, pneumatic drive systems are used, for example, in machinery and fixture construction for inserting and extracting centring pins. These products, known as pin extractor cylinders, must convey the centring pin or the mountings precisely into the end position. They must also exhibit high levels of extraction force, so that, after machining – spot welding for example – the centring pin can be extracted from the component before the removal process begins. By virtue of their accurate guidance characteristics, extractor/positioning cylinders can also be used for feeding limit stops and contour blocks.

Positioning/clamping cylinders

TÜNKERS linear cylinders combine in one compact housing the pneumatic drive mechanism, a very precise one, and, in some cases, the guide rod is supported in two bearings, together with electrical position sensing. In addition, the SZV series versions are equipped with a mechanical end position lock.


High degree of accuracy:
excellent guidance capacity
due to long bearing support
for the piston rods

Zero-backlash
bronze-graphite bushes,
manually matched, ensure
precise guidance

Guide rod = piston rod
facilitates compact dimensions

Inductive switch for
end position sensing
in the cassette version


Metal scraper protects
the guide rod from
soiling, by weld spatter
for example

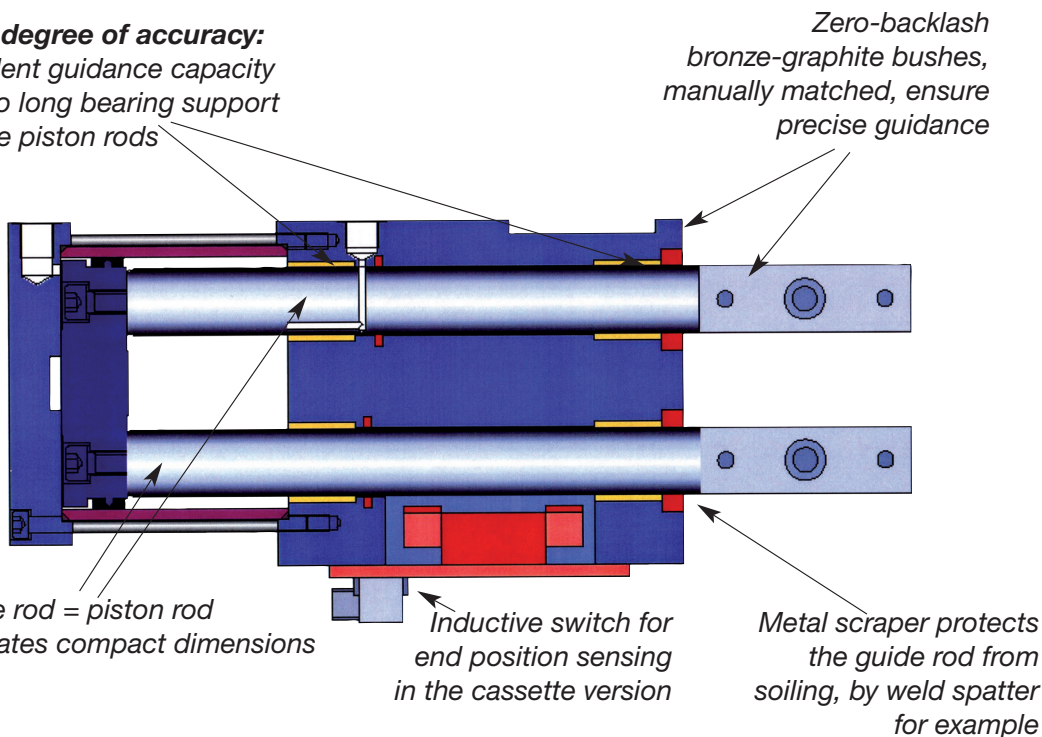

Locating Pin Unit SZK 30 20 Stroke



- Compact housing made from high-strength aluminum material with connections on multiple sides
- Drive mechanism with circular-section cylinder (Ø 30 mm) for thrust and extraction forces of approx. 350 to 250 N
- Pushrod secured against rotation, inserted in a bronze bush
- Integrated position sensing using inductive technology (T12)
- Total stroke 20 mm

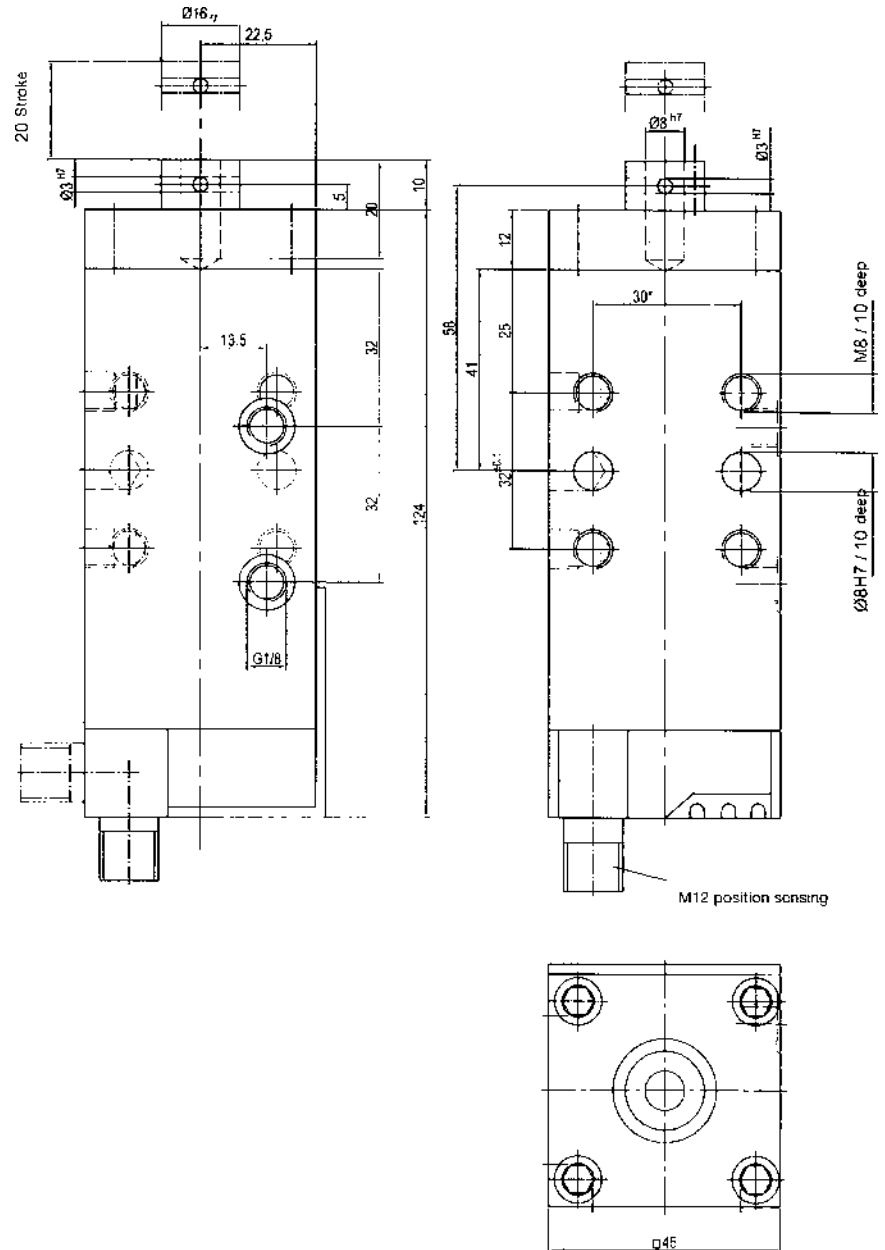

CLAMPING

Ordering example:

SZK30 20 T12
 ↳ Type ↳ Stroke ↳ Position sensing system

Order code position sensing systems:

- ...T00 without position sensing
- ...T12 24 V inductive position sensing, 1 output with integral LEDs

Type	Stroke (mm)	Ø Piston (mm)	Extraction force at 5 bar (N)	Weight ~ (kg)
SZK 30	20	30	250	0,8

Subject to technical modifications.




Locating Pin Unit SZK 30.8

CLAMPING



- Compact housing made from high-strength aluminum material with connections on multiple sides
- Drive mechanism with circular-section cylinder (Ø 30 mm) for thrust and extraction forces of 350 to 250 N
- Pushrod secured against rotation, inserted in a bronze bush
- Integrated position sensing using inductive technology (T12)
- Total stroke 40 mm

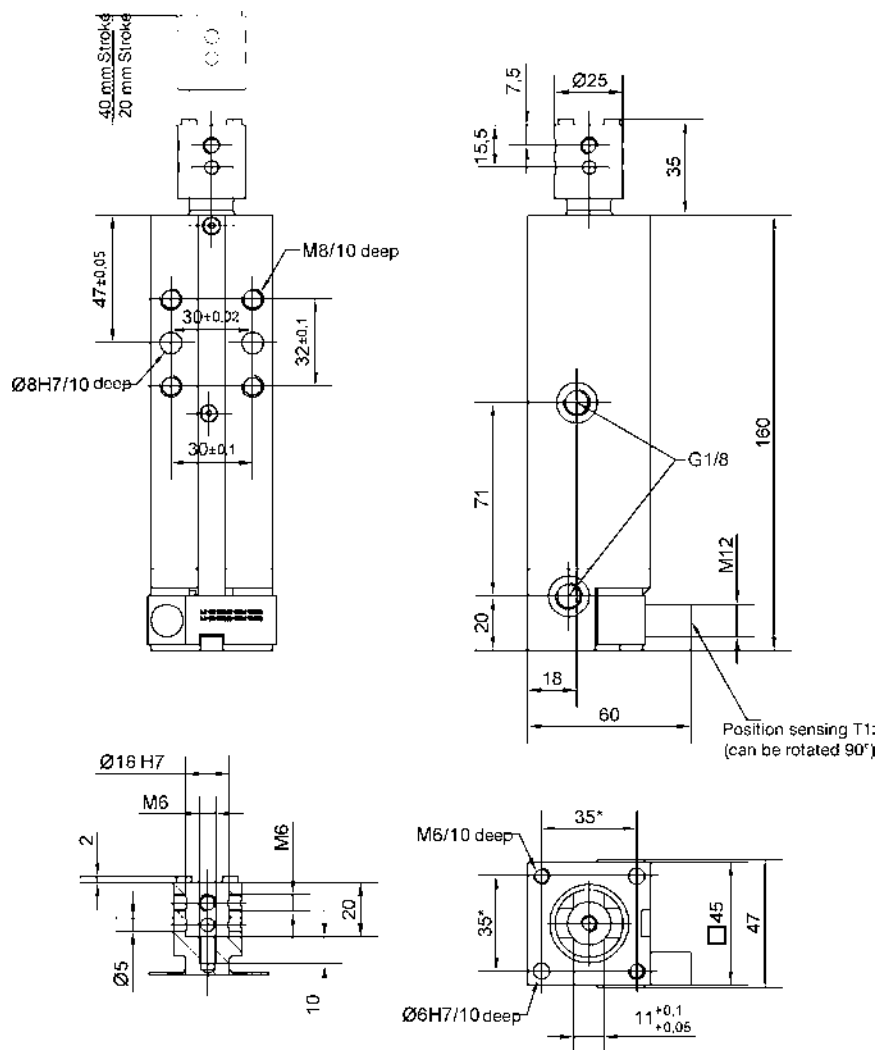

Order code TÜNKERS position sensing systems:

...T00 without position sensing

...T12 24 V inductive position sensing, 1 output with integral LEDs

Ordering example:

SZK 30.8 40 T12

→ Position sensing

→ Stroke: additional special stroke lengths (e.g. 20 mm) available on request


→ Type

Type	Piston rod dia.	Extraction force (N)	Thrust force (N)	Weight (kg)	Dimensions l x w x d (mm)
SZK 30.8	30	250	350	1,3	160x45x45

Subject to technical modifications.



- Secured against rotation
- Slim housing made from high-strength aluminum material
- Drive mechanism using oblong-section cylinder, Ø 40 to 63 mm, for thrust and extraction forces of up to approx. 1200 N
- Pushrod secured against rotation, inserted in a bronze bush, duplicated
- Integrated position sensing using inductive technology
- Total stroke 40, 60, 120 mm; intermediate lengths on request

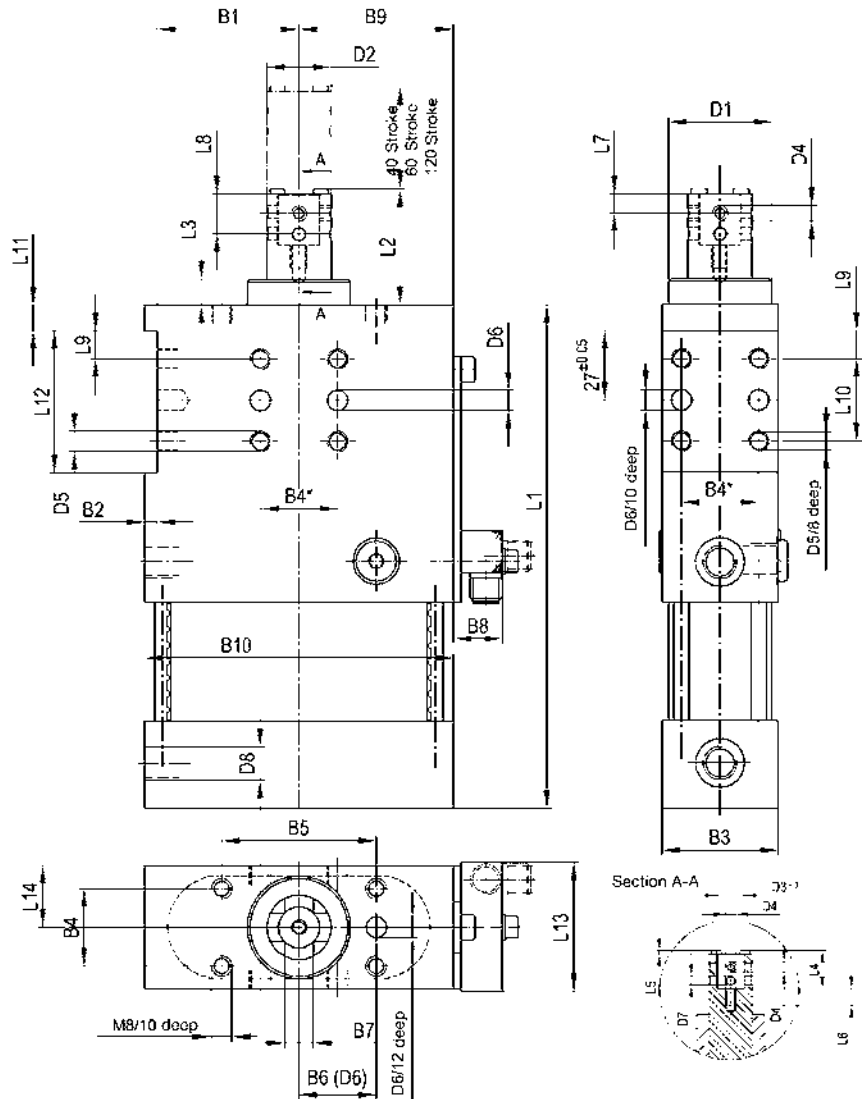

Type	Stroke (mm)	Max. static transverse force (N)	Dependent on Ø Piston (N)	Weight ~ (kg)	Dimensions l x w x d (mm)
SZK 40	40	150	40	1,8	195x75x45
SZK 40.1	60	150	40	2,4	195x120x45
SZK 40.2	120	150	40	1,8	235x75x45
SZK 63	40	200	63	2,4	235x120x45
SZK 63.1	60	200	63	2,3	355x75x45
SZK 63.2	120	200	63	3,6	425x120x45

Ordering example:

SZK 40 25 T12
 ↳ Type ↳ Position sensing
 ↳ Special stroke lengths (15 < 40 mm)

Order code TÜNKERS position sensing systems:

...T12 24 V inductive position sensing,
 1 output with integral LEDs

Type	B1	B2	B3	B4*	B5 ±0.2	B6 ±0.2	B7 ±0.1/±0.05	B8	B9	B10	D1 IT	D2 IT	D3 H7	D4	D5	D6 H7	D7	D8	L1	L2	L3	L4	L5
SZK 40	32,5	5	45	30	60	30	11	21	37,5	75	40	25	16	M6	M8	8	5	G1/8	195	45	10	22	2
SZK 40.1	32,5	5	45	30	60	30	11	21	37,5	75	40	25	16	M6	M8	8	5	G1/8	235	45	10	22	2
SZK 40.2	32,5	5	45	30	60	30		21	37,5	75	20	40	25	16	M8	8	4	G1/8	355	35	10	30	2
SZK 63	55	5	45	30	60	30	11	21	60	120	40	25	16	M6	M8	8	5	G1/4	195	45	10	22	2
SZK 63.1	55	5	45	30	60	30	11	21	60	120	40	25	16	M6	M8	8	5	G1/4	235	45	10	22	2
SZK 63.2	55	5	45	30	60	30		21	60	120	30	40	25	16	M8	8	4	G1/4	355	35	10	30	2

Type	L6	L7	L8	L9 ±0.1	L10 ±0.1	L11	L12 ±0.1	L14 ±0.1
SZK 40	10	7,5	15,5	11	32	10	55	22,5
SZK 40.1	10	7,5	15,5	11	32	10	55	22,5
SZK 40.2	10	6	37	11	32	10	55	22,5
SZK 63	10	7,5	15,5	11	32	10	55	22,5
SZK 63.1	10	7,5	15,5	11	32	10	55	22,5
SZK 63.2	10	6	37	11	32	10	55	22,5

Subject to technical modifications.




Locating Pin Unit SZKD 40/40.5

CLAMPING




- Slim housing made from high-strength aluminum material with mounting surfaces on 3 sides
- Drive mechanism with oblong-section cylinder (Ø 40 mm) for thrust and extraction forces of approx. 400 to 600 N
- Synchronously-driven guide rods, with double bearing support in the form of graphite/bronze bushes
- If required, the pushrods can rotate into the desired position
- Integrated position sensing (T12)

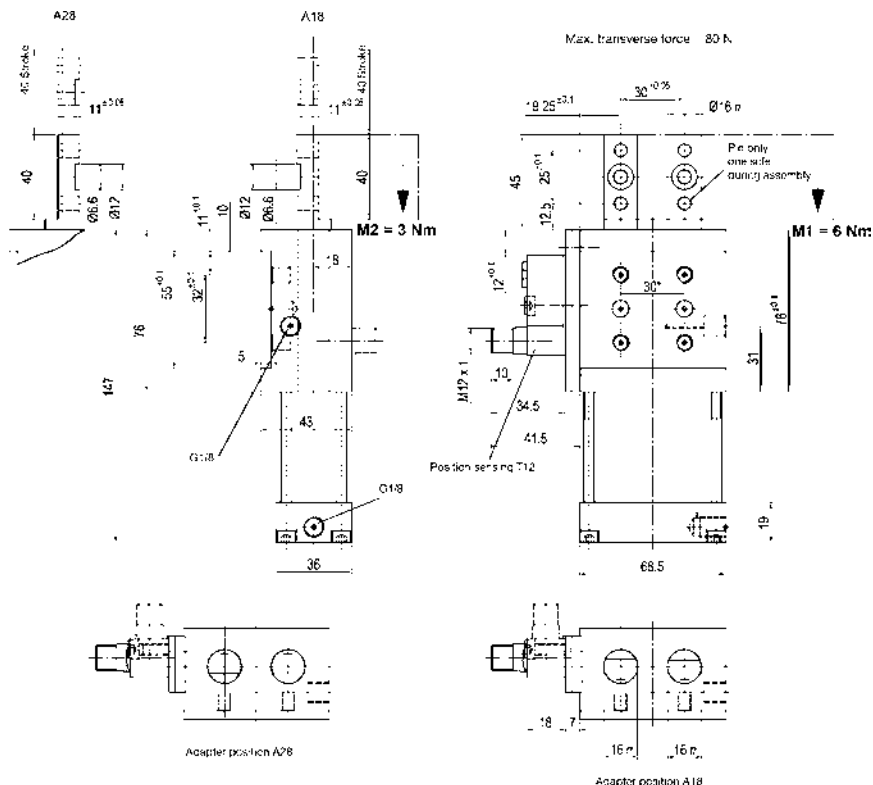

Ordering example:

SZKD 40.5 A13 T12 25 Stroke

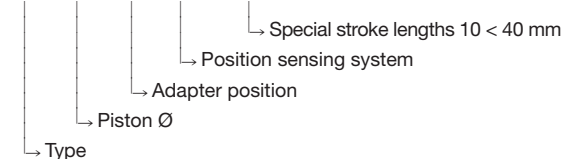

Order code TÜNKERS

position sensing:


...T12 24 V inductive position sensing, 1 output with integral LEDs

Type	Extraction force (kN)	Thrust force (kN)	Operating pressure with oilfree air max. (bar)	Mounting (G)	Weight ~ (kg)
SZKD 40.5	0,4	0,6	6	1/8	1,4


Subject to technical modifications.



- Direct-drive linear cylinder with tandem piston rod
- Compact and robust basic construction for precision stroke and thrust tasks
- Slim housing made from high-strength aluminum material, with mounting surfaces on 3 sides
- Drive mechanism with $\varnothing$ 60 mm oblong-section cylinder for thrust forces of 1400 N
- Synchronously-driven tandem-piston rod with double bearing-support in the form of graphite/bronze bushes
- If required, the pushrods can rotate into the desired position
- Integrated position sensing (T12)

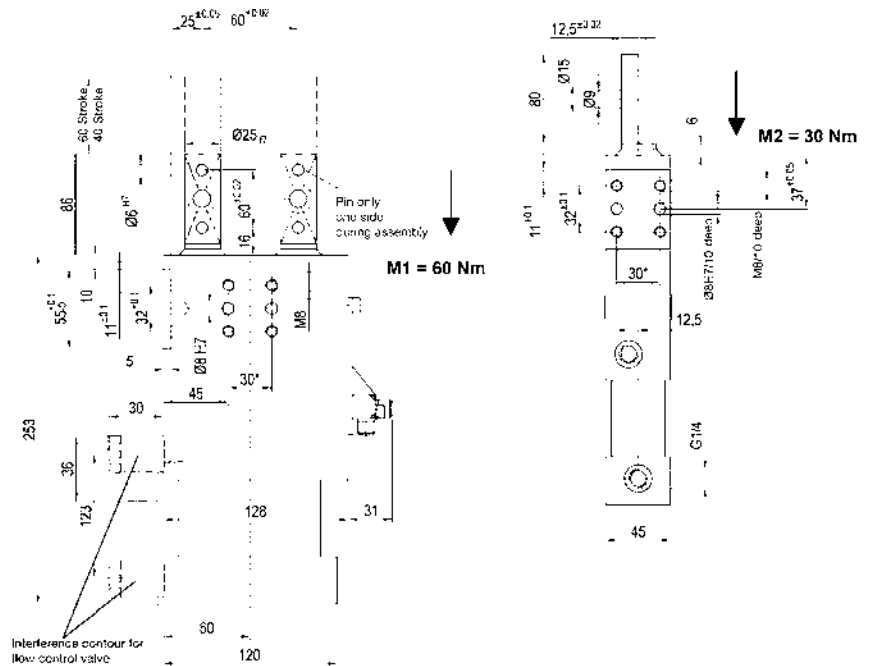


Guide rod can be rotated, adapter position must be determined during assembly.
Please Note: before rotating the guide rods, remove the threaded pin and nut for the position sensing mechanism!



tolerances at max. transverse force of 200 N

X	Stroke 0	± 0.03
	Stroke 60	± 0.1
Y	Stroke 0	± 0.1
	Stroke 60	± 0.2



Version: A13



Version A23

Ordering example:

SZKD 63.5 BR3 60 T12

```

graph TD
    A[Position sensing] --> B[Stroke]
    A --> C[Type]
    B --> D[Type]
    B --> E[Position sensing]
  
```


Order code TÜNKERS position sensing systems:

...T00 without position sensing
...T12 24 V inductive position sensing,
1 output with integral LEDs

Subject to technical modifications.

CLAMPING

POSITIONING

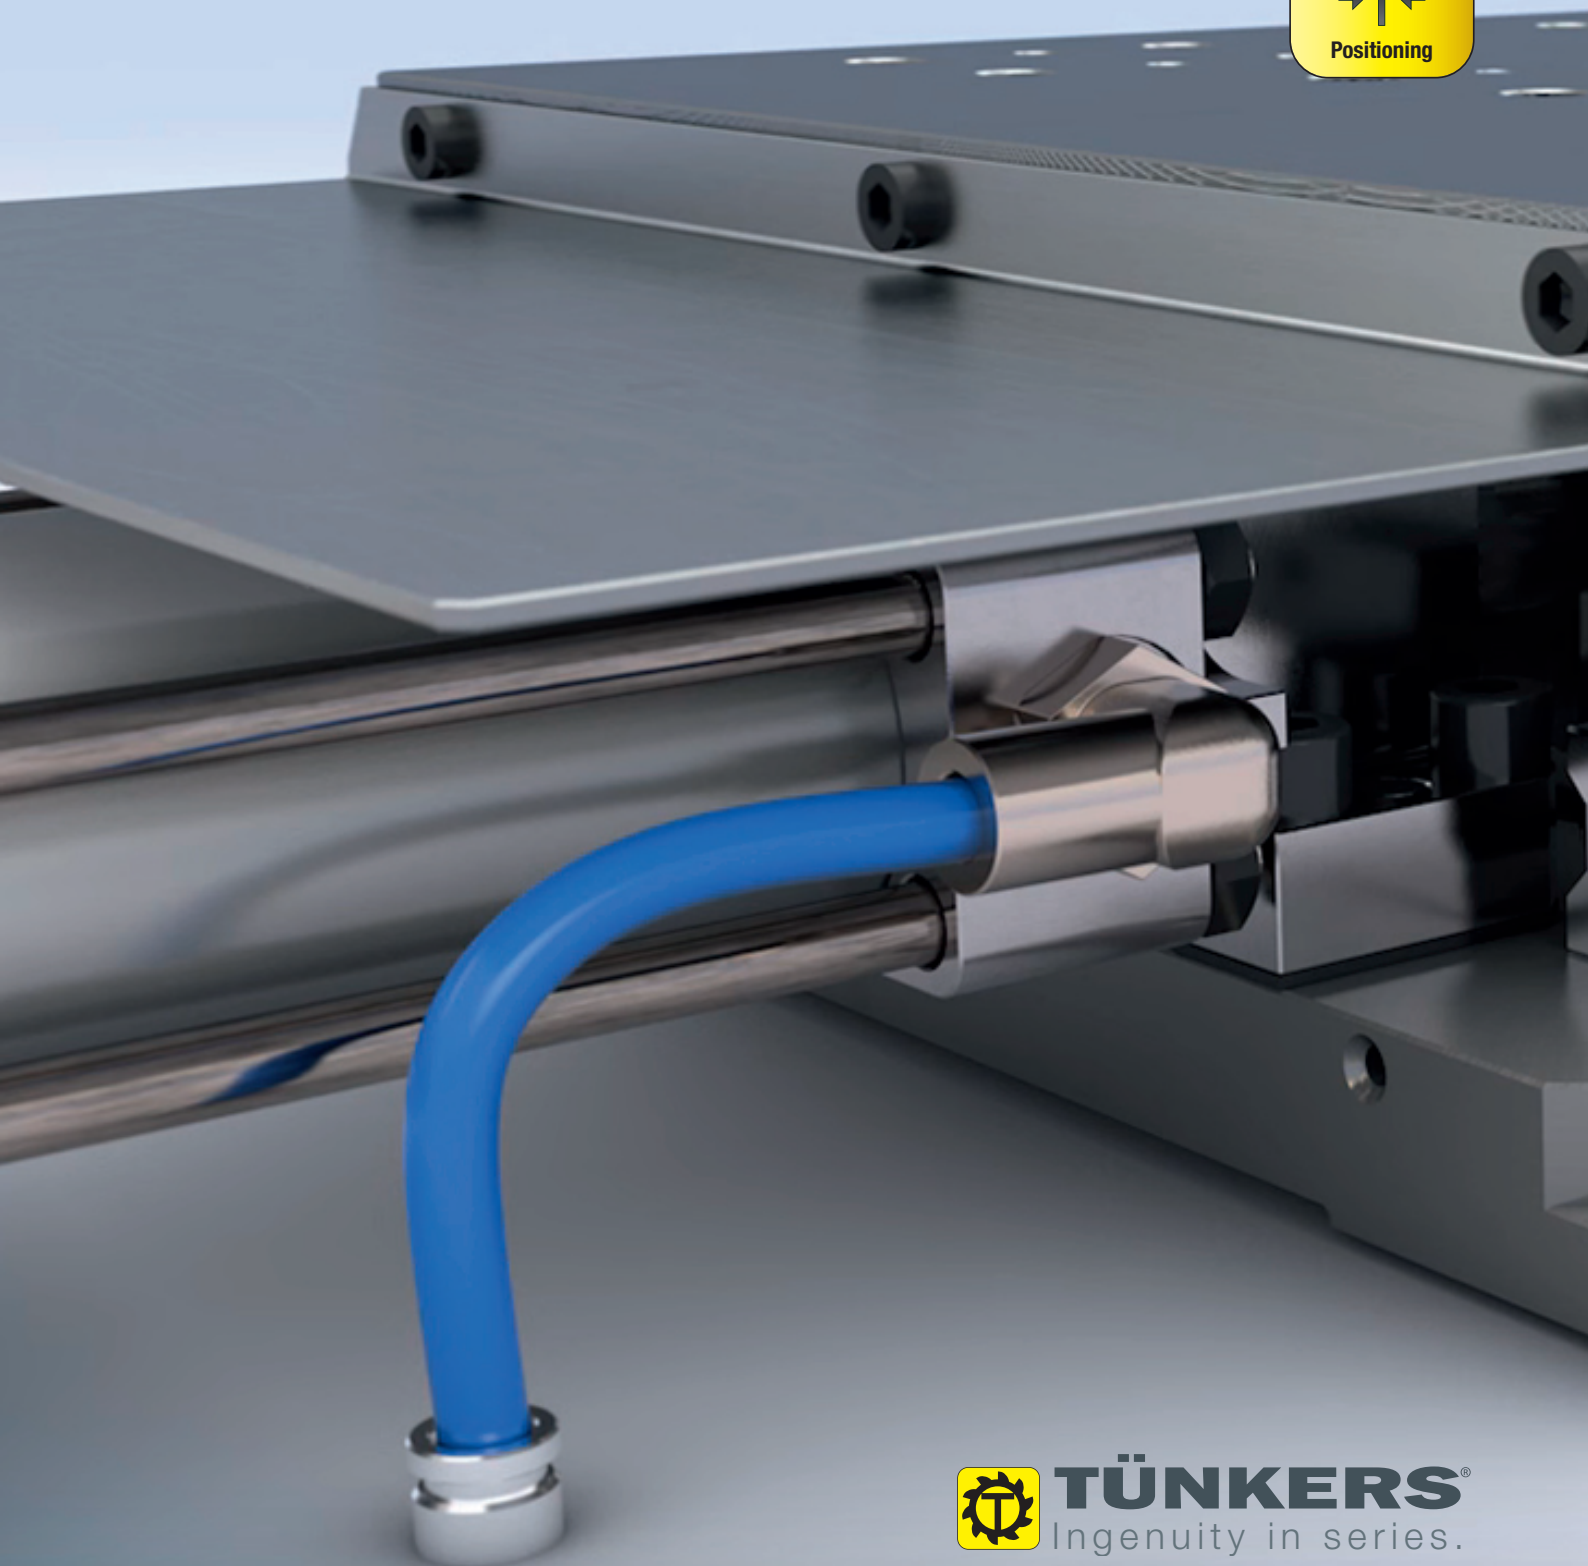



Positioning

Pivoting, traversing, lifting, rotating – these are typical functions that are the order of the day in the construction of fixtures and installations and they are used, for example, to:

- swivel-in a welding gripper
- raise a complete subassembly to working level
- traverse a clamp in order to remove components.

In the majority of cases, straightforward cylinder or traversing axes do not satisfy the requirement in terms of reproducibility and accuracy of control. Inevitably, in practice it is necessary to resort to special designs, consisting of drive mechanisms, linear control, shock absorbers and switches, which are frequently newly-designed for each particular application.

We claim that we are able to provide you with precise customised solutions – robust, compact, complete and, in addition, tried and tested with car production.

With a view to offering a robust configuration for volume production, all the products described in this catalogue feature enclosed housings, heavy-duty bearings, guides and defined end position settings with fixed limit stops, mechanical locking and position sensing.



Swivel Units



2-5

Linear Units



2-17

Linear Cylinders



2-27

Rotary Units



2-43

Lifters



2-49

POSITIONING

Pivoting dump units






Swivel Units

TÜNKERS Swivel Units are industry-proven power tools for traversing loads up to approx. 100 kg at pivoting angles up to 180°. With pneumatically- or electrically-operated cylinders, integrated knee-lever technology, positive stop and position sensing elements, TÜNKERS Swivel Units are genuine ready-to-use complete systems.

POSITIONING



Design principle

Knee-lever mechanism for secure end position and high pivoting power, with internal hard stop



Mounting options at the front and rear, optionally at the side


Pneumatic end position damping for both positions

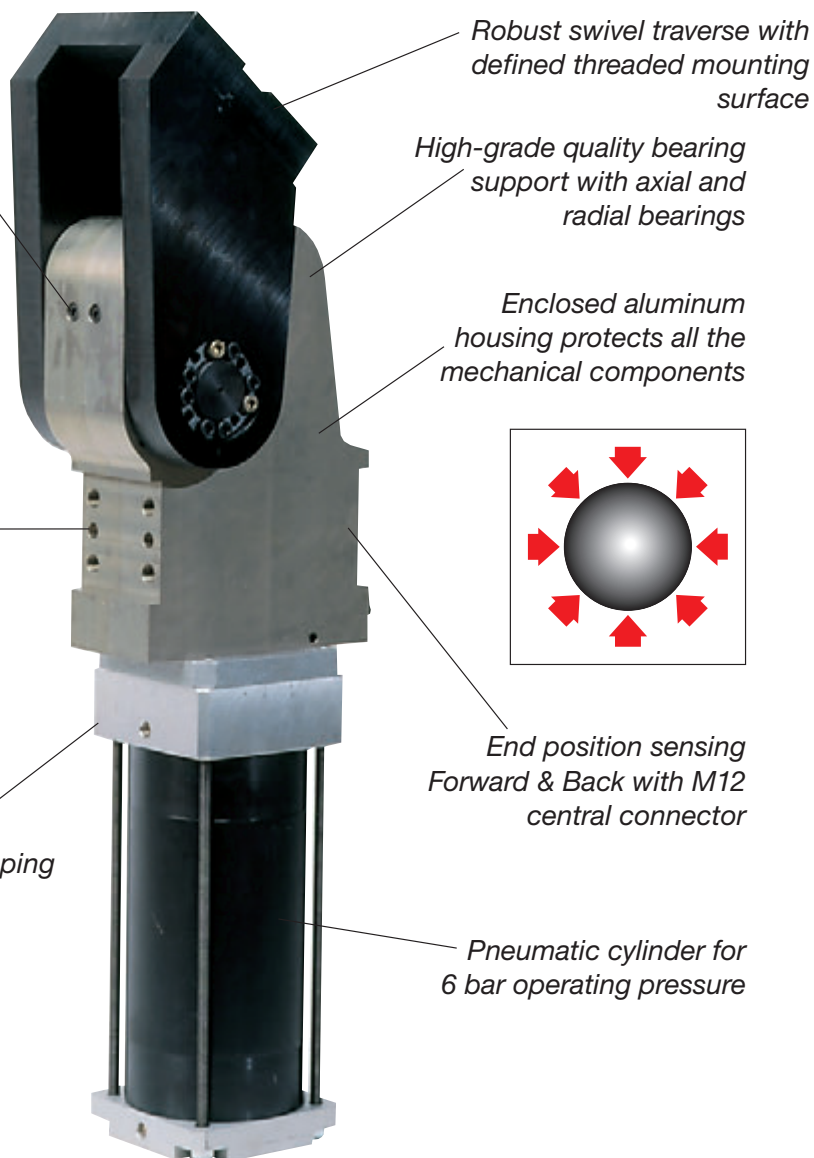

Robust swivel traverse with defined threaded mounting surface

High-grade quality bearing support with axial and radial bearings

Enclosed aluminum housing protects all the mechanical components



End position sensing Forward & Back with M12 central connector


Pneumatic cylinder for 6 bar operating pressure




External limit stops and shock absorber optional retrofit



Permissible pivoting weight as a function of the distance to the center of gravity

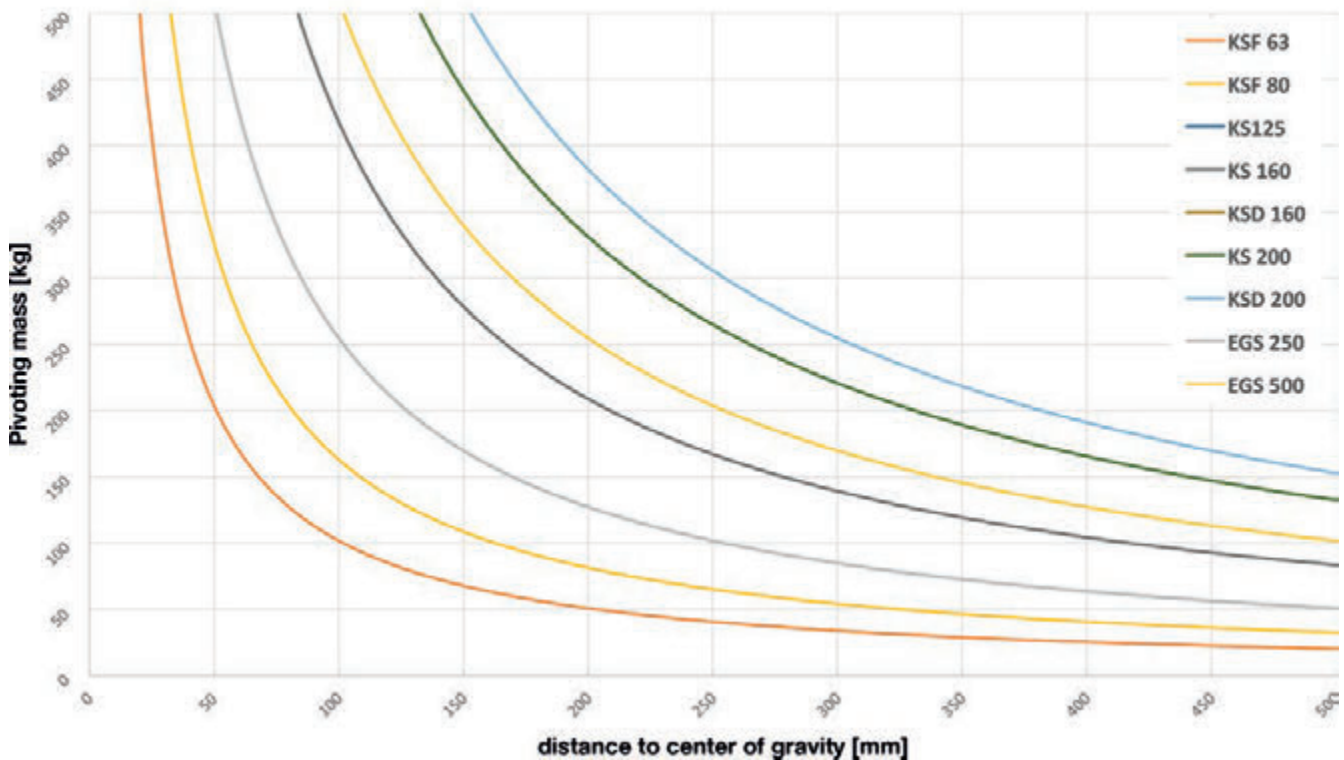

Opening and closing times as a function of the opening angle

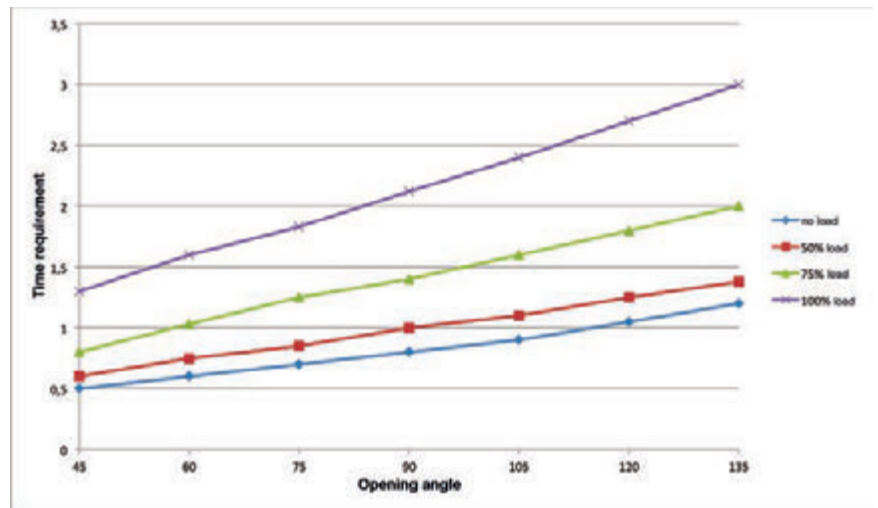

Compressed air consumption

for a complete work cycle
(open/closed) as a function of the
opening angle


Type	Opening angle								
	15°	30°	45°	60°	75°	90°	105°	120°	135°
KS 80	0,17	0,24	0,30	0,35	0,41	0,47	0,53	0,59	0,62
	0,20	0,28	0,35	0,42	0,49	0,56	0,63	0,69	0,74
	0,37	0,52	0,65	0,77	0,90	1,03	1,16	1,28	1,36
KS 100	0,32	0,44	0,55	0,65	0,76	0,87	0,98	1,08	1,15
	0,35	0,48	0,60	0,72	0,83	0,95	1,08	1,19	1,27
	0,67	0,92	1,15	1,37	1,59	1,82	2,06	2,27	2,42
KS 125	0,57	0,79	0,98	1,17	1,36	1,56	1,76	1,94	2,07
	0,63	0,88	1,10	1,30	1,51	1,74	1,96	2,16	2,31
	1,20	1,68	2,08	2,48	2,87	3,30	3,72	4,10	4,38
KS 160	0,97	1,35	1,68	2,00	2,32	2,67	3,01	3,32	3,55
	1,03	1,44	1,79	2,14	2,48	2,85	3,21	3,54	3,78
	2,00	2,79	3,47	4,14	4,80	5,52	6,22	6,86	7,33
KS 200	1,54	2,16	2,69	3,20	3,74	4,27	4,84	5,31	5,67
	1,61	2,25	2,80	3,33	3,87	4,45	5,01	5,53	5,91
	3,15	4,41	5,49	6,53	7,58	8,72	9,82	10,84	11,58

-

...T12 Inductive position sensing 24 V,
2 outputs without LED display

Type	Torque (Nm)	Ø Cylinder (mm)	Weight (kg)	Dimensions l x w x d (mm)
KS 63	23	63	6,8	335x106x78

2 - 8 |

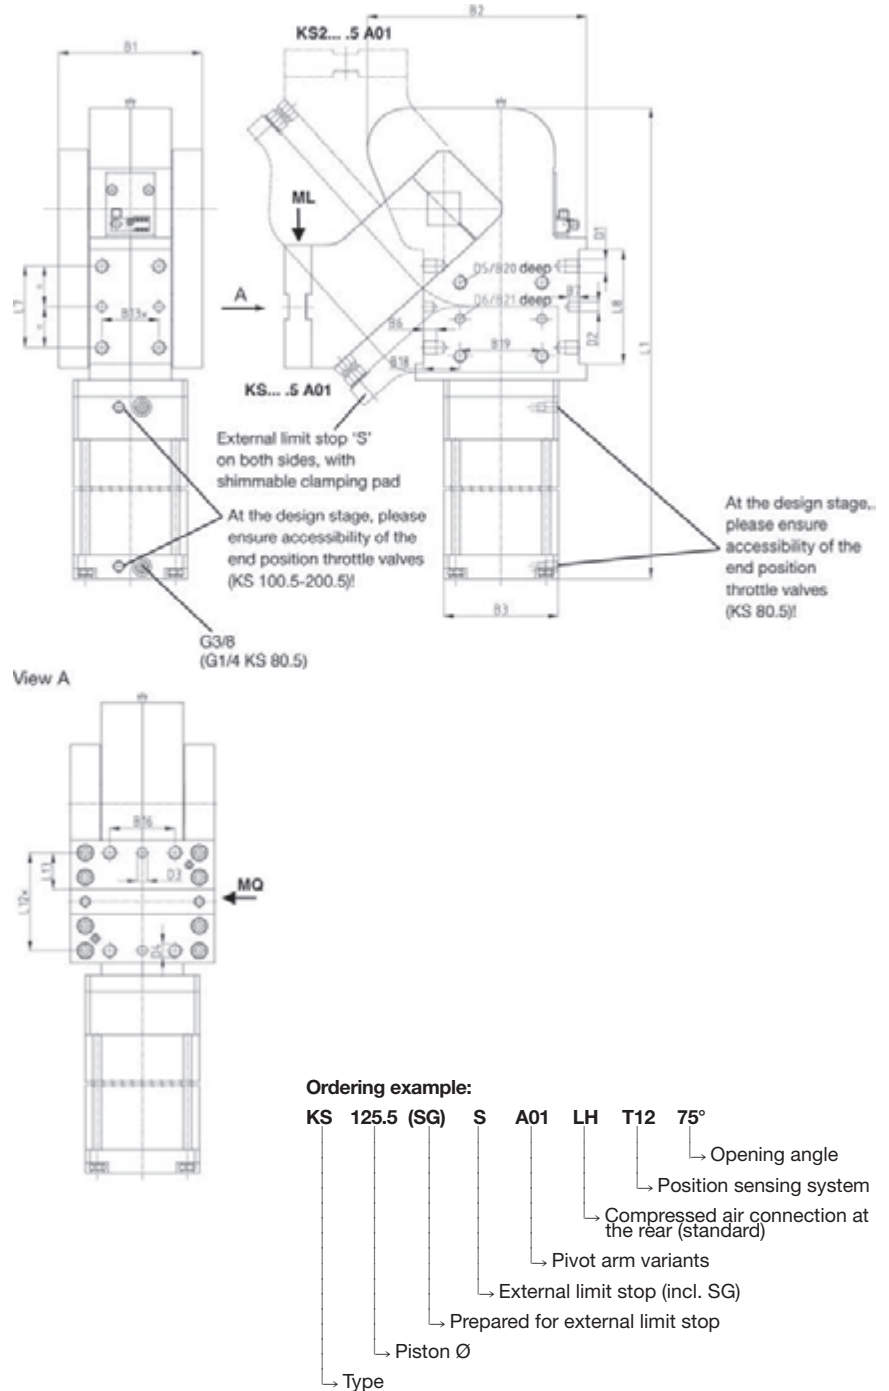

- Pivoting dump units with optimised knee-lever mechanism for constant torque cycle
- Enclosed main body made from high-strength aluminum material
- Powered by pneumatic cylinder, Ø 80 to 200 mm
- Locked end position
- Pivot arm mounted on square-section shaft
- Pneumatic damping for the end position
- Drive shaft running in needle roller bearings, with axial and radial bearings
- Maximum pivoting angle 135°
- Built-in end position sensing
- Optional: BD locking unit

Type	Max. permissible torque ML max. 0-135° (Nm)	Transverse torque load MQ max. (Nm)	Pivoting time at 135° opening angle (sec.)	Ø Piston (mm)	Weight ~ (kg)
KS 80.5	90	360	3,3	80	30
KS 100.5	140	380	3,3	100	35
KS 125.5	250	1000	3,3	125	65
KS 160.5	410	1000	3,3	160	75
KS 200.5	650	1000	4,3	200	85

Type	B1	B2	B3	B6	B7	B13*	B16	B18 ±0,1	B19*	B20	B21	D1	D2 H7	D3 H7	D4	D5	D6 H7	L1 (max. 135°)	L7 ±0,1	L8 ±0,1	L12*	L13
KS 80.5	145	288	140x62	18	12	50	60	30	85	16	10	M12	10	10	M12	M16	12	604	50	80	90	30
KS 100.5	145	288	110	18	12	50	60	30	85	16	10	M12	10	10	M12	M16	12	602	50	80	90	30
KS 125.5	176	370	140	16	12	70	80	45	100	16	12	M16	12	12	M16	M16	12	730	100	140	120	45
KS 160.5	176	370	180	16	12	70	80	45	100	16	12	M16	12	12	M16	M16	12	746	100	140	120	45
KS 200.5	176	370	220	16	12	70	80	45	100	16	12	M16	12	12	M16	M16	12	751	100	140	120	45

Subject to technical modifications.




Vario-Swivel Unit KSV... .5

POSITIONING



- Enclosed main body made from high-strength aluminum material
- Powered by pneumatic cylinder, Ø 80 to 200 mm
- Locked end position
- Pivot arm mounted on square-section shaft
- Pneumatic damping for the end position
- Drive shaft running in needle roller bearings, with axial and radial bearings
- Maximum pivoting angle 135°
- Built-in end position sensing
- Vario-pivoting dump units with stepless adjustment of the opening angle
- Optional: BD locking unit

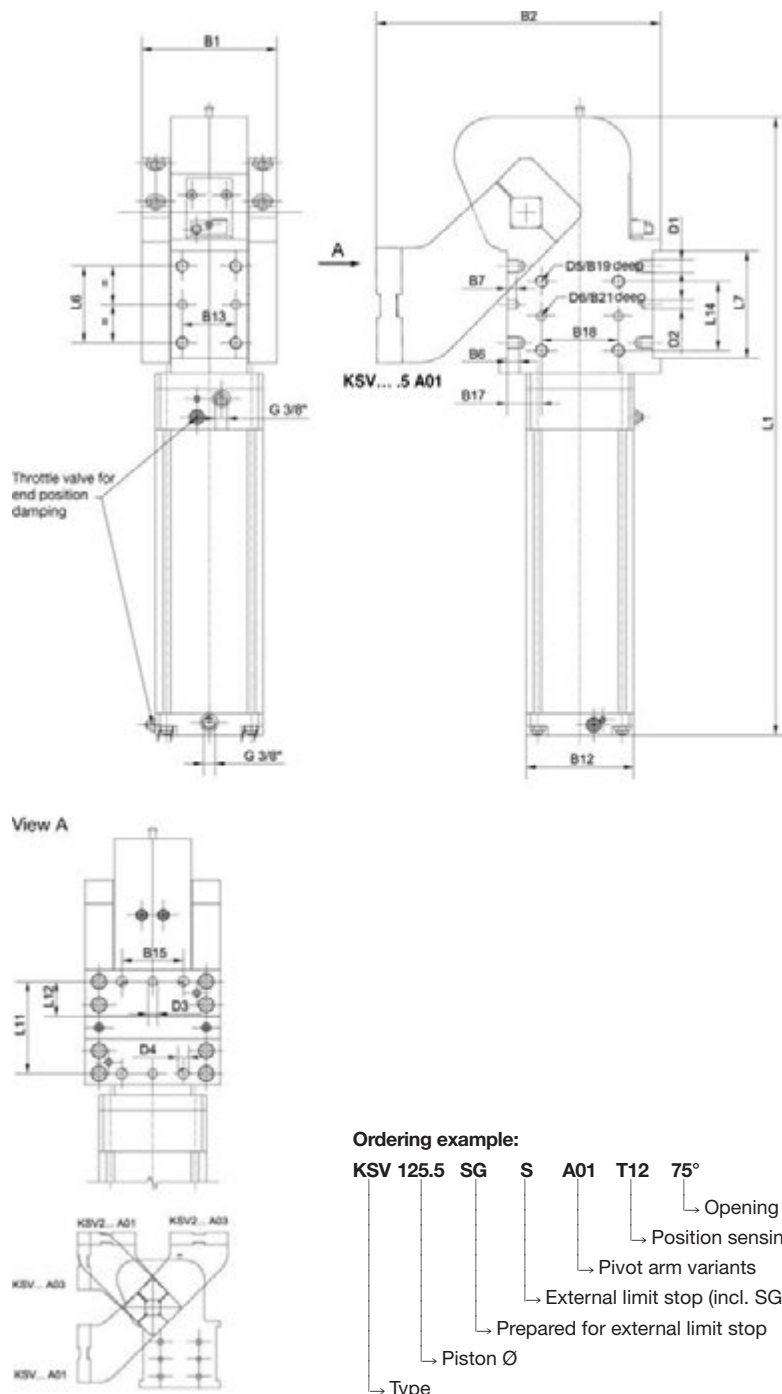

Ordering example:

KSV 125.5 SG S A01 T12 75°

↳ Opening angle
 ↳ Position sensing system
 ↳ Pivot arm variants
 ↳ External limit stop (incl. SG)
 ↳ Prepared for external limit stop
 ↳ Piston Ø
 ↳ Type


Type	Max. permissible torque ML max. 0-135° (Nm)	Transverse torque load MQ max. (Nm)	Pivoting time at 135° opening angle (sec.)	Ø Piston (mm)	Cylinder R = Circular-section F = slim	Weight ~ (kg)
KSV 80.5	90	360	3,3	80	F	33
KSV 100.5	140	380	3,3	100	R	38
KSV 125.5	250	1000	3,3	125	R	70
KSV 160.5	410	1000	3,3	160	R	80
KSV 200.5	650	1000	4,3	200	R	90

Type	B1	B2 ±0,1	B6	B7	B12	B13*	B15	B17 ±0,1	B18*	B19	B21	D1	D2 H7	D3 H7	D4	D5	D6 H7	L1 (max. 135°)	L6 ±0,1	L7 +0,1	L11*	L12* ±0,1	L14*
KSV 80.5	145	288	18	12	140x62	50	10	30	85	16	10	M12	10	10	M12	M16	12	680	50	80	90	30	60
KSV 100.5	145	288	18	12	110	50	10	30	85	16	10	M12	10	10	M12	M16	12	684	50	80	90	30	60
KSV 125.5	176	370	16	12	140	70	20	45	100	16	12	M16	12	12	M16	M16	12	805	100	140	120	45	90
KSV 160.5	176	370	16	12	180	70	20	45	100	16	12	M16	12	12	M16	M16	12	820	100	140	120	45	90
KSV 200.5	176	370	16	12	220	70	20	45	100	16	12	M16	12	12	M16	M16	12	825	100	140	120	45	90

Subject to technical modifications.



- Pivoting dump units with hydraulic speed damping and emergency stop function
- Enclosed main body made from high-strength aluminum material
- Powered by hydraulic cylinder Ø 100 to 200 mm
- Locked end position
- Pivot arm mounted on square-section shaft
- Pneumatic damping for the end position
- Drive shaft running in needle roller bearings, with axial and radial bearings
- Maximum pivoting angle 135°
- Built-in end position sensing

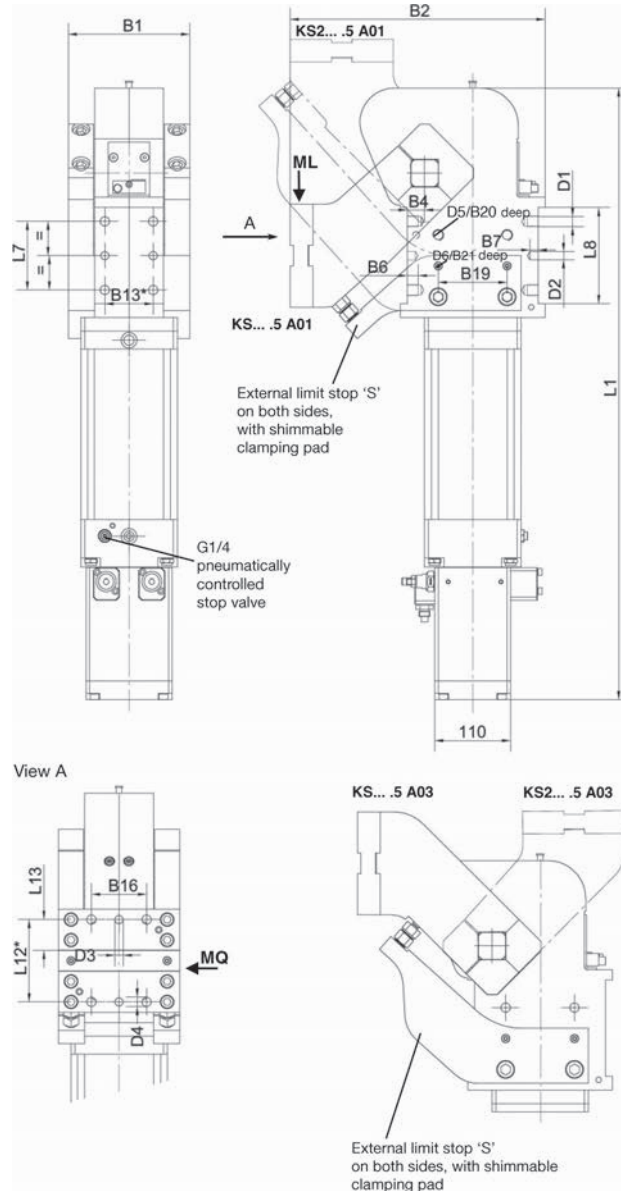

Ordering example:

KS 125.5 H SG S A01 T12 75°
 ↳ Type
 ↳ Piston Ø
 ↳ Hydraulic speed damping
 ↳ Prepared for external limit stop
 ↳ External limit stop (incl. SG)
 ↳ Pivot arm variants
 ↳ Position sensing system
 ↳ Opening angle

Type	Max. permissible torque ML max. 0-135° (Nm)	Transverse torque load MQ max. (Nm)	Pivoting time at 135° opening angle (sec).	Ø Piston (mm)	Weight ~ (kg)
KS 80.5 H	140	380	3,3	100	30
KS 125.5 H	250	1000	3,3	125	68
KS 200.5 H	650	1000	3,3	200	85

Type	B1	B2	B4	B6	B13*	B16	B19*	B20	B21	D1	D2 H7	D3 H7	D4	D5	D6 H7	L1 (max. 135°)	L7 ±0,1	L8 ±0,1	L12*	L13*
KS 80.5 H	145	288	20	18	50	60	85	16	10	M12	10	10	M12	M16	12	814	50	80	30	30
KS 125.5 H	176	370	25	16	70	80	100	16	12	M16	12	12	M16	M16	12	890	100	140	120	45
KS 200.5 H	176	370	25	16	70	80	100	16	12	M16	12	12	M6	M16	12	890	100	140	120	45



Subject to technical modifications.



180°-Swivel Unit KSD...



- Slim configuration with 180° pivoting angle
- Powered by oblong-section cylinder, Ø 63 and 80 mm
- Force transmitted via knee-lever mechanism
- Locked end position
- Pneumatic damping for both end positions
- Drive shaft running in needle roller bearings, with axial and radial bearings
- Optional built-in end position sensing

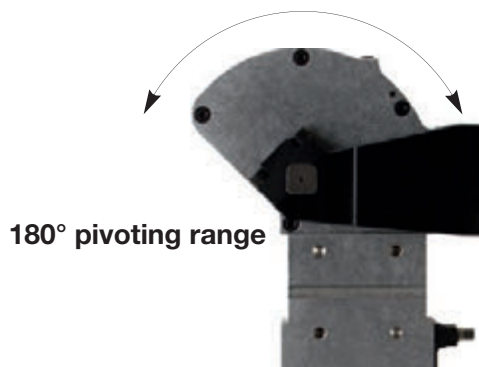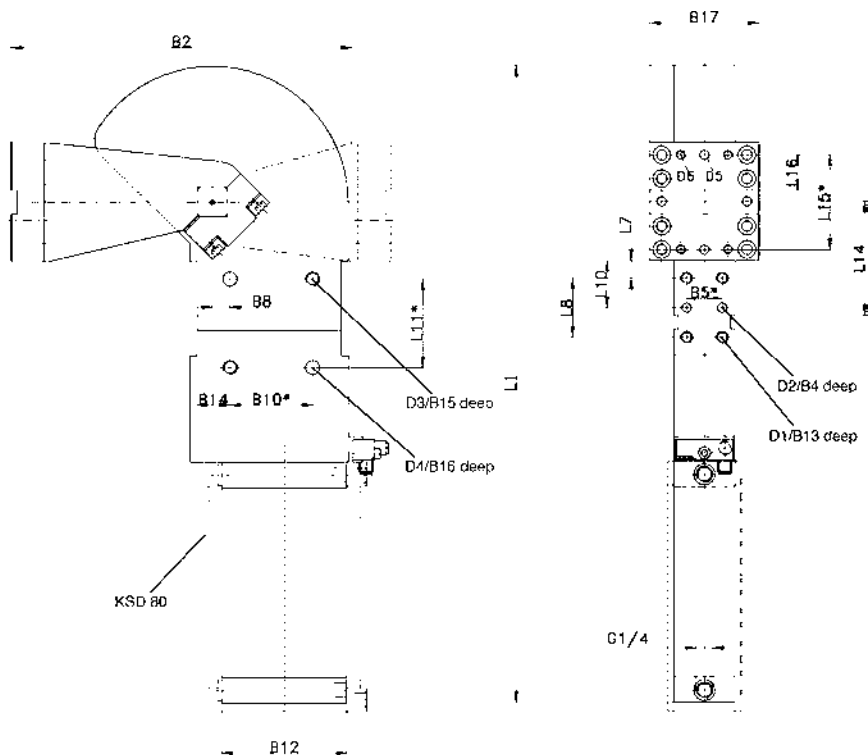

Ordering example:

KSD 63 A10 T12 180°

→ Type
→ Piston Ø
→ Clamp arm variants
→ Position sensing system
→ Opening angle

Type	Torque (Nm)	Ø Cylinder (mm)	Weight ~ (kg)
KSD 63	50	63	20
KSD 80	90	80	22


Type	B2	B4	B5*	B8 ±0,05	B10*	B12	B13	B14 ±0,1	B15	B16	B17	D1	D2 H7	D3	D4 H7	D5 H7	D6	L1	L7 ±0,1	L8 ±0,2	L10 ±0,05	L11*	L14
KSD 63	290	12	30	15	70	106	18	28	15	12	102	M8	8	M12	12	8	M8	680	15	50	40	75	96,5
KSD 80	290	12	30	15	70	140	18	28	15	12	102	M8	8	M12	12	8	M8	730	15	50	40	75	96,5

Type	L15*	L16 ±0,1
KSD 63	80	30
KSD 80	80	30

Subject to technical modifications.



- Slim configuration with oblong-section cylinder
- Force transmitted via knee-lever mechanism
- Locked end position
- Pneumatic damping for both end positions
- Drive shaft running in needle roller bearings, with axial and radial bearings
- Maximum pivoting angle 135°
- Optional built-in end position sensing

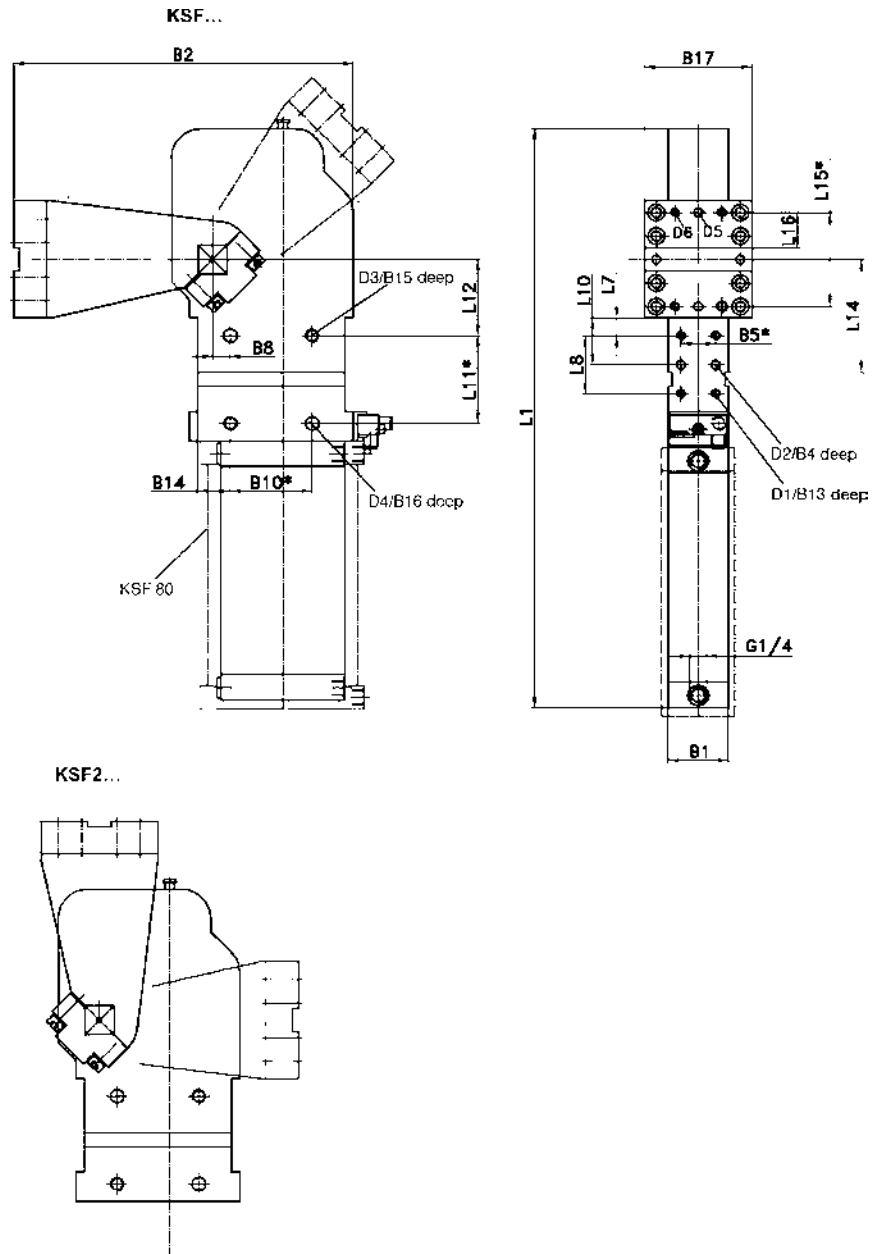

Ordering example:

KSF 63 A10 T12 135°

- Type
- Piston Ø
- Clamp arm variants
- Position sensing system
- Opening angle

Type	Torque (Nm)	Ø Cylinder (mm)	Weight ~ (kg)
KSF 63	50	63	17
KSF 80	110	80	19

Type	B1	B2	B8 ±0,05	B10*	B14 ±0,1	B17	D5 H7	D6	L1 ~	L7 ±0,1	L8 ±0,2	L10 ±0,05	L11*	L12 ±0,05	L14	L15*	L16 ±0,1
KSF 63	52	290	15	70	28	92	8	M8	530	15	50	40	75	65	96,5	80	30
KSF 80	62	290	15	70	28	102	8	M8	600	15	50	40	75	65	96,5	80	30

Subject to technical modifications.



Electric Pivoting Dump Unit EKS... .6



POSITIONING



- Pivoting mechanism powered by electric hollow shaft motor and ball screw
- Dimensions compatible with pneumatic series
- Holding brake for securing end position and emergency stop fitted as standard
- Optional frequency converter flange-fitted to the motor to regulated the pivoting motion, with soft start, acceleration and braking profile



Option:
adapted frequency converter

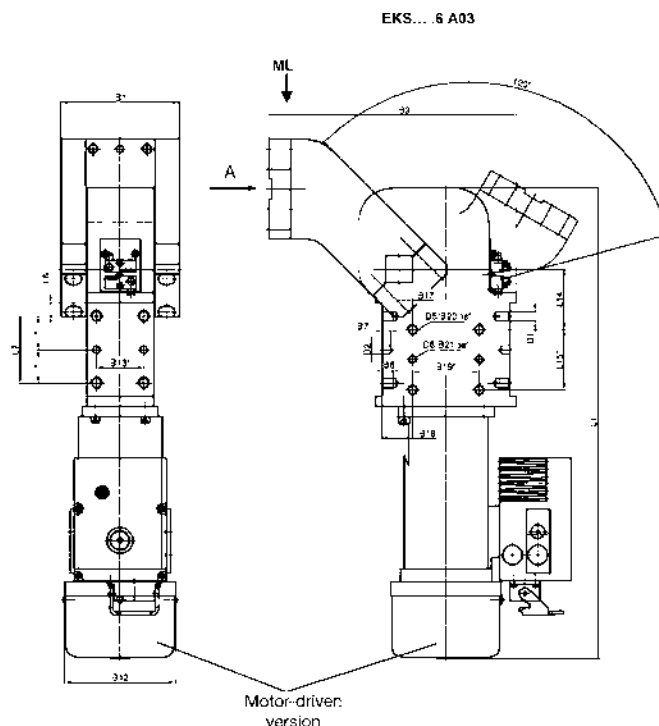

Ordering example:

EKS 160.6 (SG) S A01 T12 120° MS01


↳ Type
 ↳ Prepared for ext. limit stop
 ↳ External limit stop (incl. SG)
 ↳ Pivot arm variants
 ↳ Position sensing system
 ↳ Opening angle
 ↳ SEW MOVIMOT

Type	Max. permissible torque ML max. (Nm)	Transverse torque loading MQ max. (Nm)	Pivoting time at max. 180° opening angle (sec.)	Weight (kg) without pivoting traverse
EKS 100.6	180	380	2,35	52
EKS 160.6	320	1000	2,35	60
EKS 200.6	450	1000	2,55	78

Type	Drive motor						
	Nominal voltage U Y AC (V)	Duty cycle (ED)	Nominal power (W)	Nominal rating n_n (1/min)	Motor Md at N_m (Nm)	Nominal current I (A)	Protection type DIN 40050
EKS 100.6	400	20%	280	830	3,2	1,3	IP 54
EKS 160.6	400	20%	720	900	7,6	3,3	IP 54
EKS 200.6	400	20%	1700	1230	13,0	5,6	IP 54

Type	B1	B3	B7	B12 dia.	B13*	B16 ±0,1	B17 ±0,05	B18 ±0,1	B19*	B20	B21	D1	D3 H7	D4	D5	D6 H7	L1	L6 ±0,1	L7 ±0,1	L12* ±0,1	L13 ±0,1	L14 ±0,05	L15*
EKS 100.6	145	288	12	164	50	60	10	30	85	16	10	M12	10	M12	M16	12	615	15	50	90	30	85	60
EKS 160.6	176	370	12	164	70	80	20	45	100	16	12	M16	12	M16	M16	12	701	20	100	120	45	90	90
EKS 200.6	176	370	12	164	70	80	20	45	100	16	12	M16	12	M16	M16	12	729	20	100	120	45	90	90

Subject to technical modifications.

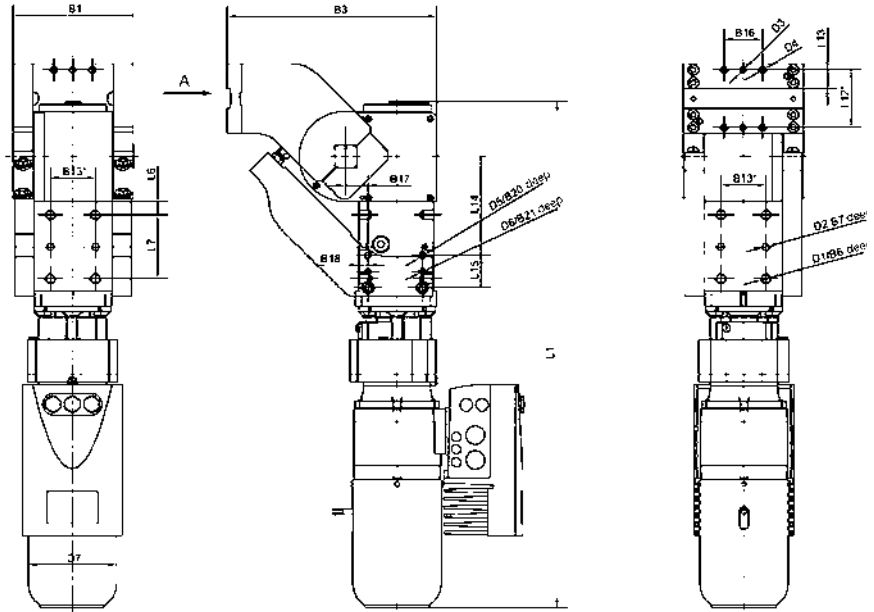

- Conversion of the pivoting motion by mean of a globoidal index drive
- Eccentric location of the shaft for zero-backlash bearing support of the drive mechanism
- Compact configuration with principal dimensions compatible with the TÜNKERS pneumatic series
- High emergency stop resistance
- Cycle time advantage compared with the pneumatic series due to adjustable traverse speed (<2 sec to >3 sec at 135° opening angle)
- Rotational speed feedback via combination sensor for high-precision positioning due to constant torque until idle state
- Compact configuration due to bolt-on frequency converter
- Control via any established systems (Profibus, Profinet, etc.)

Ordering example:

EGS 250 (SG) S A03 T80 180°

↓ Type
 ↓ Prepared for ext. limit stop
 ↓ External limit stop (incl. SG)
 ↓ Pivot arm variants
 ↓ Position sensing system
 ↓ Opening angle

Type	Max. permissible torque ML max. (Nm)	Transverse torque loading MQ max. (Nm)	Pivoting time at max. 180° opening angle (sec.)	Weight (kg) without pivoting traverse
EGS 125	125	400	2,5	32
EGS 250	250	400	2,5	65
EGS 500	500	400	2,5	110

Type	Drive motor					
	Nominal voltage AC (V)	Nominal current I _n (A)	Duty cycle (ED)	Nominal rev/min n _n (1/min)	Motor M _n at N _n	Protection type DIN 40050
EGS 125	400	0,95	20%	1380	0,8	IP54
EGS 250	400	0,96	20%	1380	1,73	IP54
EGS 500	400	3,6	20%	1380	5,3	IP54

Type	B1	B2 ±0,1	B3	B4	B5	B6	B7	B8	B9 ±0,1	B10	B11	B13*	B15	B16 ±0,2
EGS 125	167	101,5	202,5	10	5	18	12	5	120	130	168	50	5	60
EGS 250	187	122	215	20	5	16	12	5	117	127	180	70	5	60
EGS 500	216	140	280	20	10	18	15	10	145	165	239	70	5	80

Type	B17 ±0,1	B18 ±0,1	B19	B20	B21	B23	X1	X2	D1	D2 H7	D3 H7	D4	D5	D6 H7	L1 -	L3	L4 ±0,1	L5 ±0,1	L6 ±0,1	L7 ±0,1	L8 ±0,1	L9	L10 -
EGS 125	25	15	85	16	12	235,5	156	140	M12	10	10	M12	M12	10	710	100	30	77,5	15	50	80	147,5	238,5
EGS 250	35	15	85	16	12	269	156	140	M16	12	10	M12	M12	10	789	110	30	71	20	100	140	176	296,5
EGS 500	47	27	100						M16	12	12	M16	M16	12	930,5	150	30	110	20	100	140	248	379,5

Type	L11 ±0,02	L12* ±0,1	L13 ±0,1	L14 ±0,1	L15*	L16	L17
EGS 125	195	90	30	130	50	214,5	434
EGS 250	233	90	30	155	50	145,2	471
EGS 500	260	120	45	125	90	198	551

Subject to technical modifications.

POSITIONING

Linear Units





Linear Units

Linear units for moving loads up to a maximum 1,000 kg with stroke lengths up to approx. 500 mm. Powered by pneumatic cylinders or, alternatively, by electric motors with ball screws. Dependent on load and stroke, we can provide two different system solutions:

Compact Linear unit

Linear unit in integral configuration, whereby the drive mechanism, guide and locking system are combined in one housing.

Standard Linear unit

Unit in modular configuration, with separate mounting plate, recirculating ball bearing guide, drive cylinder and locking mechanism.

System configuration: Compact version

Guide carriage as integral subassembly with drive mechanism, cylinder, linear control, locking mechanism and mounting plate



Linear control with two precision rods and zero-backlash fitted bronze/graphite bushes

End position sensing for both positions


Basic housing with screwed aluminum plates

Locking mechanism to secure the end positions

Optional: Shock absorber for limit end stop

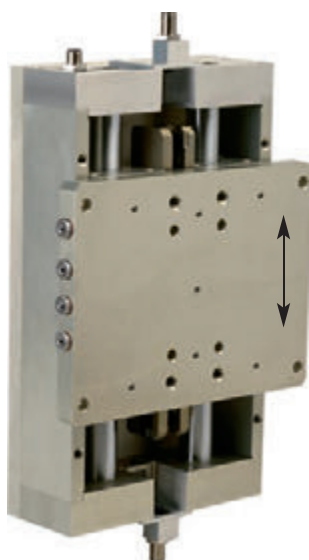



Principle: piston rod acts as guide rod

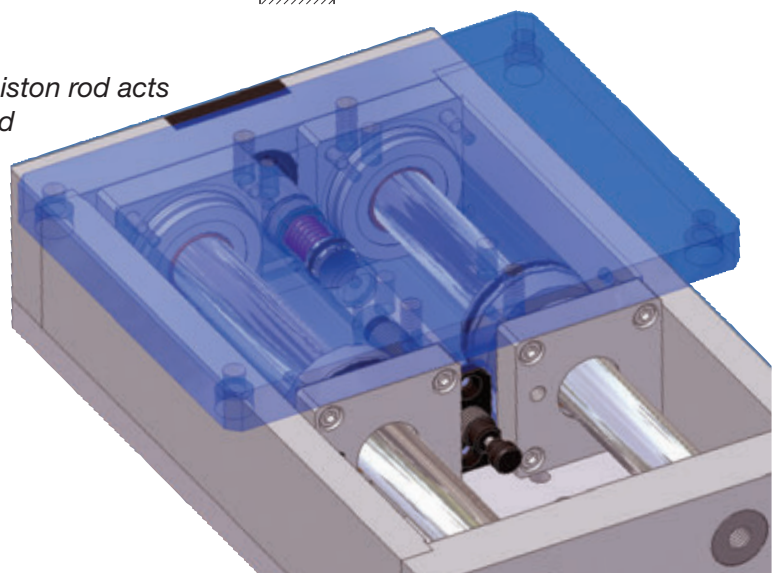

Vertical
e.g. as lifting unit

System configuration Standard-Version

with pneumatic drive mechanism

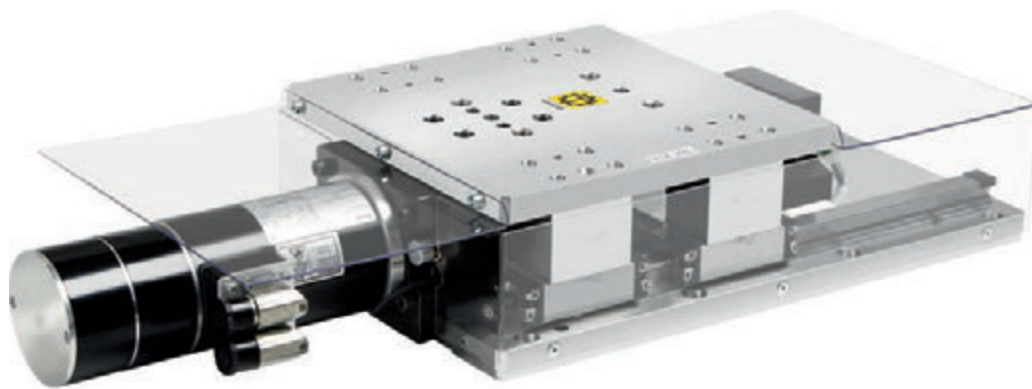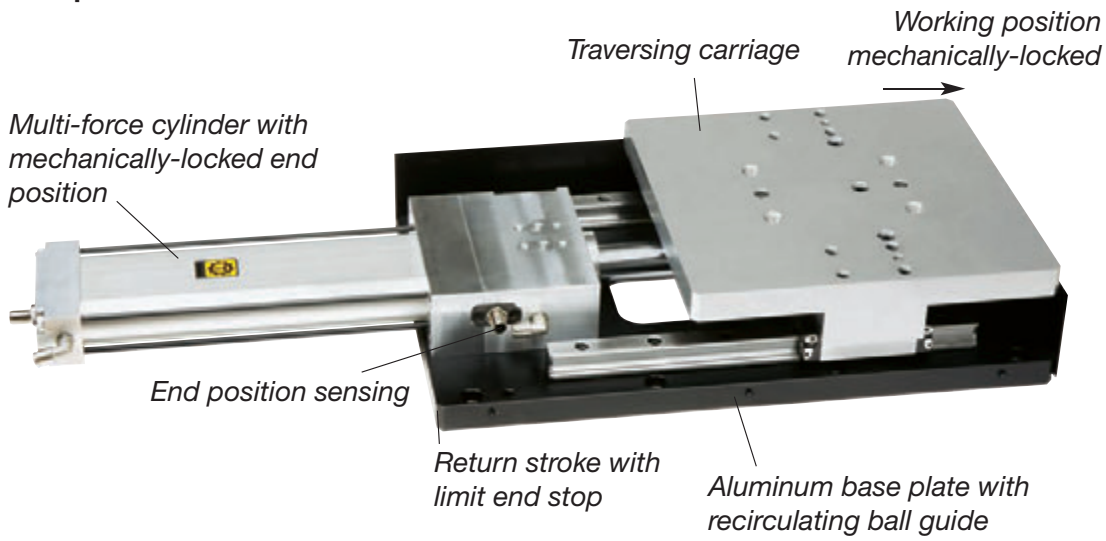


with electric drive mechanism

Structurally similar to the pneumatic unit, but skid driven by servo-motor and ball screw.




Linear unit LE 15

POSITIONING

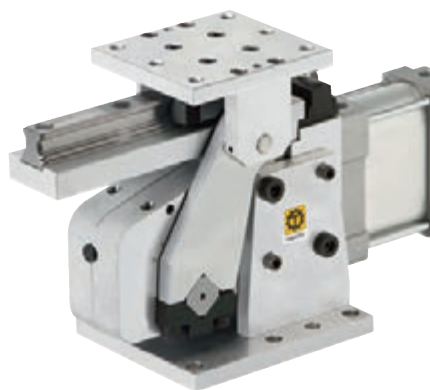

- Mini-Linear unit for moving loads up to 15 kg
- Skid with recirculating ball guide
- Powered by pneumatic clamping unit
- End position locked by knee-lever
- Forward/back end position sensing using inductive sensors

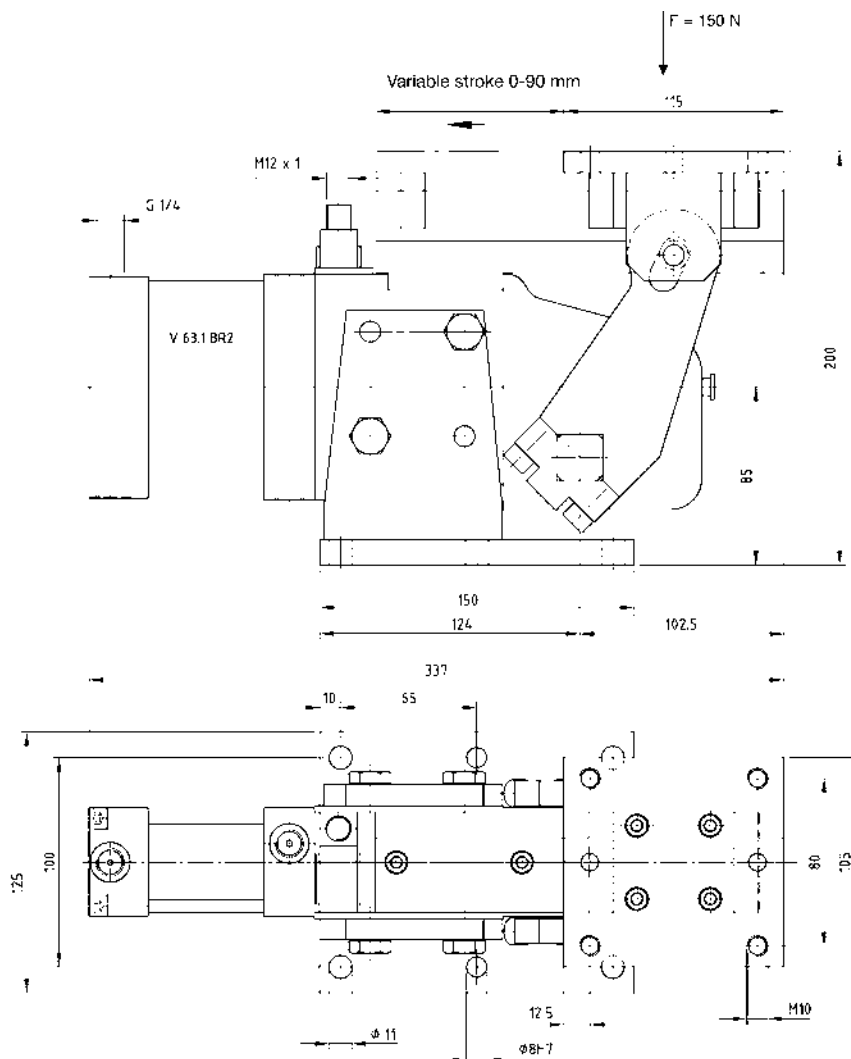

Type	Loading force (kN)	Ø Cylinder (mm)	Weight (kg)	Dimensions l x w x d (mm)
LE 15	0,15	15	7,6	337x202,5x125

Subject to technical modifications.




Linear unit LE 60




POSITIONING

- Robust housing made of screwed aluminum plates
- Linear unit guide with 2 precision rods running in 4 bronze/graphite bushes for stroke lengths up to max. 200 mm
- 2 Pneumatic cylinders, 55 mm diameter, integral with the guide skid, for traversing forces up to 1,750 N
- End position switch for both positions
- Standard with end position damping by buffers
- Optional: mechanical end position locking using knee-lever system

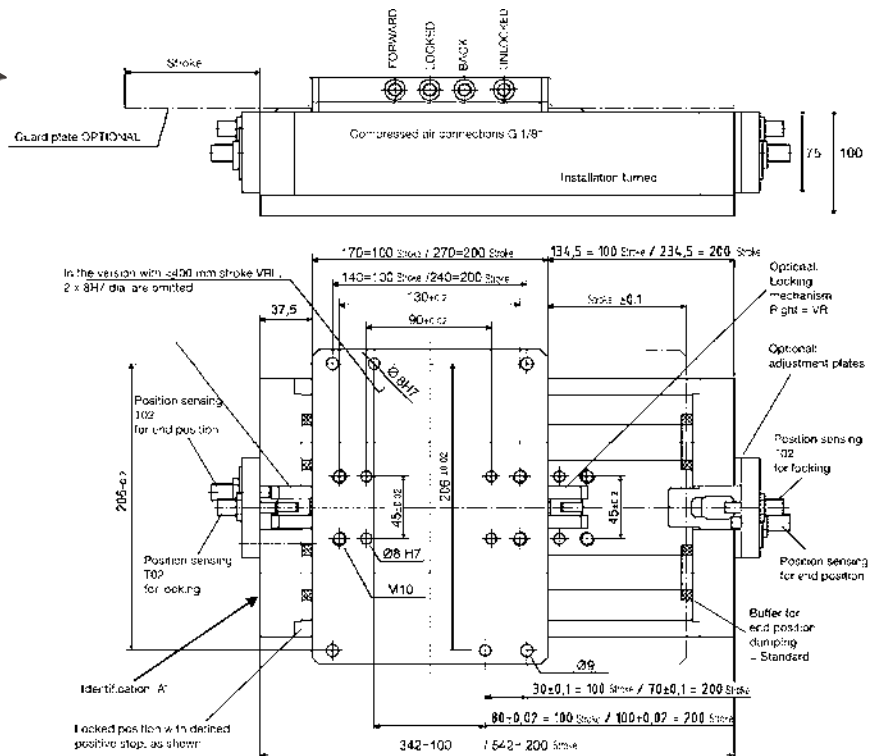

Ordering example:

LE60 100 VR SB T02

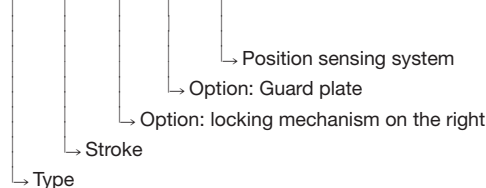

Order code TÜNKERS position sensing systems:

...T00 without position sensing
 ...T12 24 V inductive position sensing,
 2 outputs without LED display

Weight: 100 mm Stroke = approx. 13,5 kg
 200 mm Stroke = approx. 16,8 kg
 G max.: 30 kg
 M max.: 60 Nm
 Fast stroke at 5 bar = 1750 N

Standard stroke lengths:


100 mm; 200 mm
 Intermediate stroke lengths for LE 100 (50 to 100 mm) and LE 200 (110 to 200 mm) on request

Options:


VR: Locking mechanism on the right
 VL: Locking mechanism on the left
 VRL: Locking mechanism on the right and the left
 SB: Guard plate on the right and the left

Type	Loading force (kN)	Ø Cylinder (mm)	Weight (kg)	Dimensions l x w x d (mm)
LE 60	0,3	60	13,5	542x226x100

Subject to technical modifications.

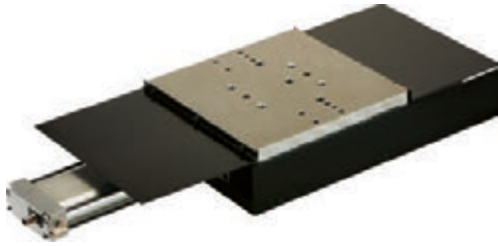

- Robust steel base plate
- Two guide rails with recirculating ball guides
- Skid plate made from aluminum with standard mounting hole pattern
- Powered by multi-force pneumatic cylinder with end position locking on one side
- End position sensing
- Optional: Protective covers

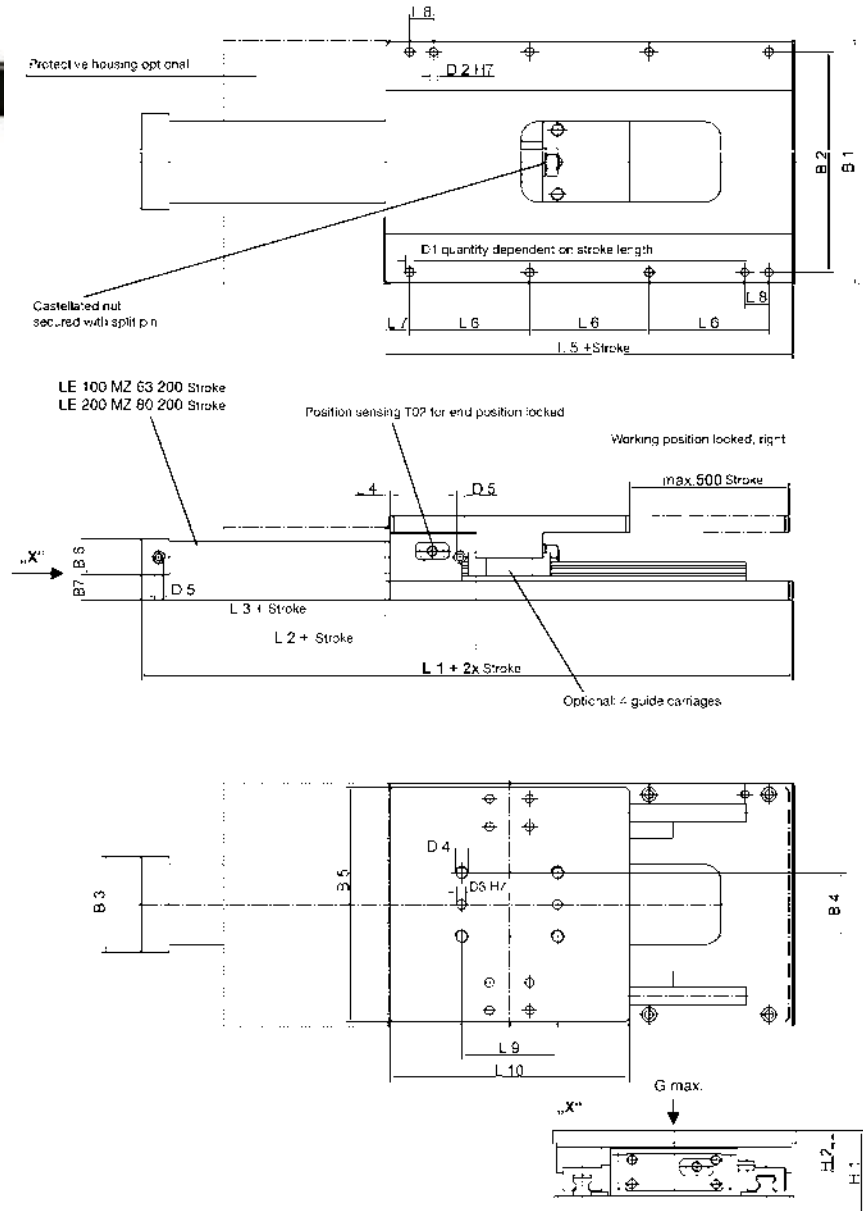

Ordering example:

LE100 200 SB T02

- Type
- Stroke
- Option: Protective housing
- Position sensing system

Order code TÜNKERS position sensing systems:

...T00 without position sensing
 ...T12 24 V inductive position sensing,
 2 outputs without LED display

G max.: LE 100 = 100 kg
 LE 200 = 200 kg

Type	Fast stroke force at 6 bar (kN)	Torque M max. (Nm)	Standard stroke length (mm)	Weight at 200 mm stroke ~ (kg)
LE 100	1,75	100	100, 200, 300,	60
LE 200	2,8	300	400, 500	110

Type	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	B1	B2	B3	B4	B5	B6	B7	D1dia.	D2dia.	D3dia.	D4	D5	H1	H2
LE 100	416	219	106	5	310	150	30	30	120	300	305	276	120	80	295	45	31	11	10	12	M16	1/8	105	15
LE 200	550	339	153	5	410	180	35	40	150	400	405	376	140	100	395	62	34	13	12	12	M20	1/4	130	22

Subject to technical modifications.




Electric Linear unit ELE 100/200

POSITIONING



- Robust steel base plate
- Dual recirculating ball guides with four traversing carriages
- Steel skid plate with standard mounting hole pattern
- Powered by rotary current motor or servo-motor, as per end client's specification
- Skid motion via ball screw

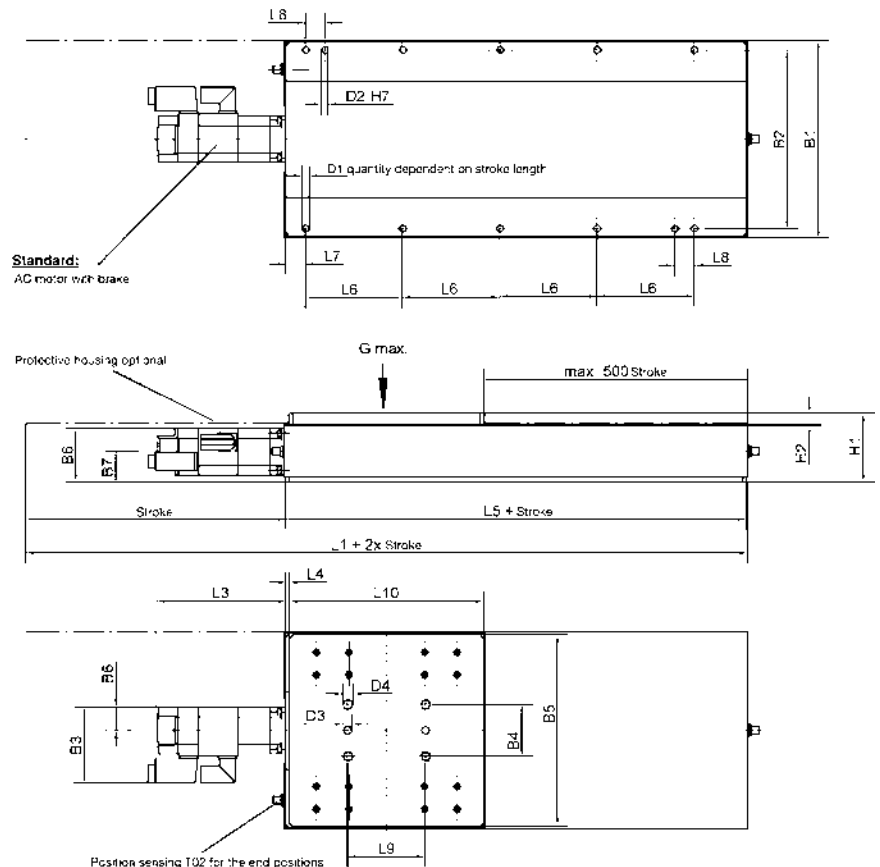

Ordering example:

ELE 100 200 42 V DM SB T02

- Position sensing system
- Optional: Guard plate (SB)
- Standard rotary current motor / Optional: Servo-motor (SM)
- Nominal voltage
- Stroke
- Type

Order code TÜNKERS

Position sensing:

- ...T00 without position sensing
- ...T12 24 V inductive position sensing, 2 outputs without LED display

G max.: LE 100 = 100 kg
LE 200 = 200 kg
LE 500 = 500 kg

Standard rotary current motor:

Protection type: IP 54
Nominal voltage: 42 V or 400 V
Nominal power: 50 W
Idle period: min. 10 sec.

Optional:

Servo-motor with brake and transducer for multiple positions

SB: Guard plate


Type	Fast stroke force (kN)	Torque M max. (Nm)	Standard stroke length (mm)	Weight at 200 mm stroke ~ (kg)	Dimensions (mm)
ELE 100	1,75	100	100, 200, 300,	60	435x305x105
ELE 200	2,8	300	400, 500	110	635x376x130

Subject to technical modifications.

Heavy-duty Linear unit LE 1000



- Base plate made of high-grade aluminum material
- Dual recirculating ball guide
- Skid plate with standard mounting hole pattern
- Powered by pneumatic cylinder with end position locking and damping on both sides
- End position sensing and locking sensing on both sides
- Linear control protected against weld spatter by aramid cover strip
- Fine adjustment of the stroke length ± 5 mm
- Optional: Protective covers
- Optional: Staking drilling for the end positions
- Optional: Shock absorber

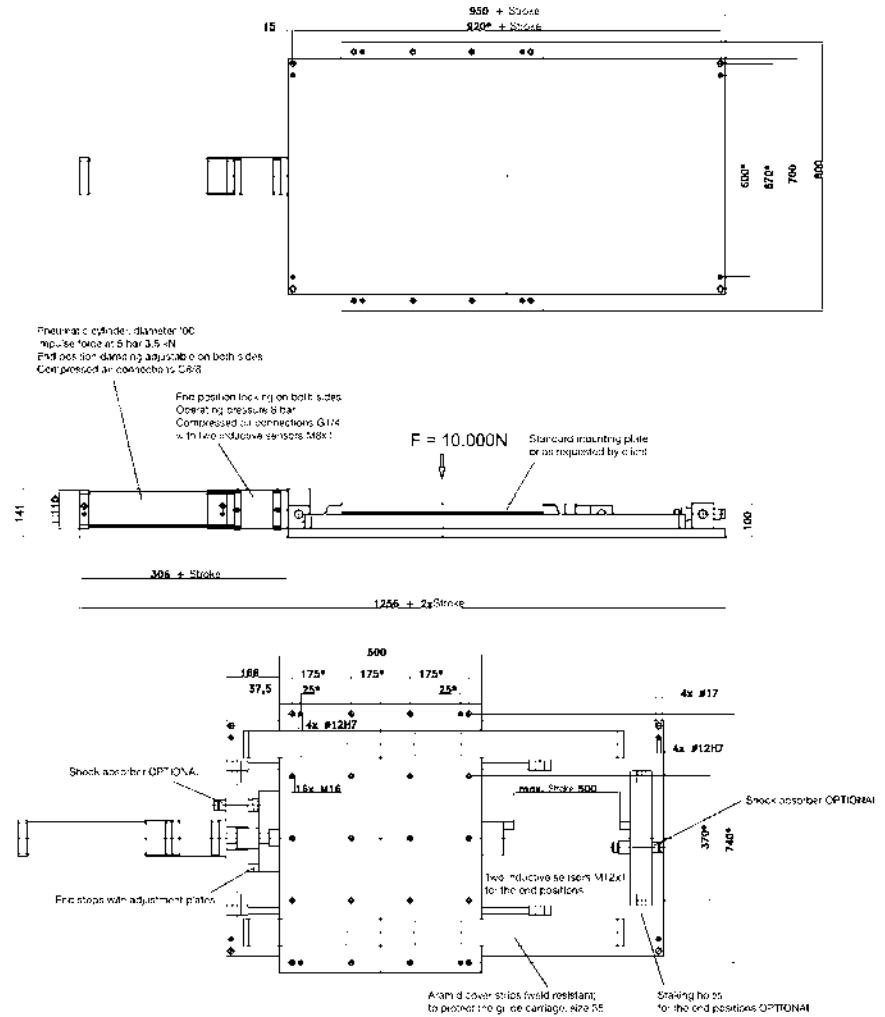

POSITIONING

Ordering example:

LE 1000 200 VRL T02

→ Type

→ Stroke

→ Locking mechanism right/left

→ Position sensing system

Order code TÜNKERS position sensing systems:

...T00 without position sensing
 ...T12 24 V inductive position sensing,
 2 outputs without LED display

Type	Fast stroke force at 5 bar (kN)	Torque M max. (Nm)	Standard stroke length (mm)	Weight (kg)	Length
LE 1000	3,5	6400	100, 200, 300, 400, 500	195	950 + Stroke

Subject to technical modifications.




- Pneumatic linear unit with dual knee-lever locking
- Purely mechanical over-centre locking for the forward and rear positions, using patented dual system
- Defined end position location with zero-backlash and mechanically secured
- Robust 4-point star guide
- Designed for traverse weights from 100 up to 200 kg

Vario principle:




- Fine adjustment of the end position in the 0 to 50 mm stroke range
- Designed for traverse weights from 100 up to 200 kg

Application: e.g. traversing fixtures or clamping subassemblies in two necessary working positions

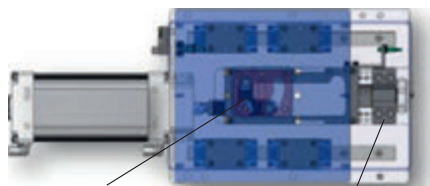

Locking mechanism

Fine stroke adjustment

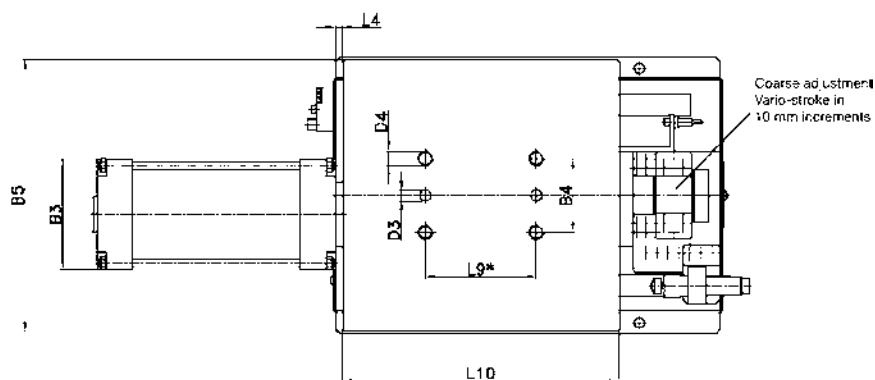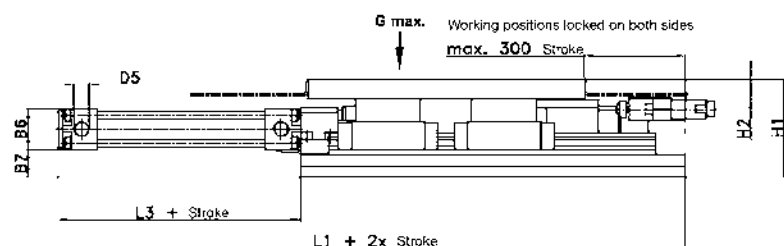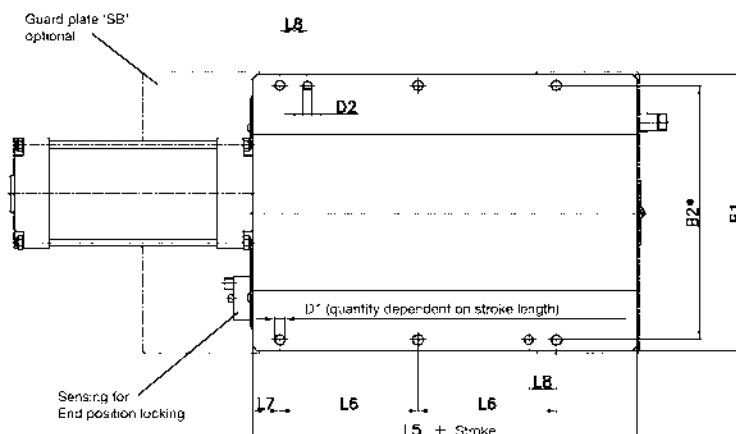

Ordering example:

LEV 100 200 SB T02

Type Stroke Option: Guard plate Position sensing system

Order code TÜNKERS position sensing systems:

...T00 without position sensing
 ...T12 24 V inductive position sensing,
 2 outputs without LED display

Type	Fast stroke at 6 bar (kN)	Torque M max. (Nm)	Standard Variostrokes (mm)	Weight at 100 stroke ~ (kg)
LEV 100	1,75	100	100, 200, 300	40
LEV 200	2,8	300	100, 200, 250, 300	60

Type	L1	L3	L4	L5	L6 ±0,1	L7	L8 ±0,02	L9	L10	B1	B2	B3	B4	B5	B6	B7	D1	D2 H7	D3 H7	D4	D5	H1	H2
LEV 100	481	163	8	318	150	30	30	120	300	300	276	120	80	295	44	30	11	10	12	M16	G 3/8	105	20,5
LEV 200	656	236	8	420	180	35	40	150	400	405	376	150	100	390	62	29	13	12	12	M20	G 3/8	130	22

Subject to technical modifications.

POSITIONING

Linear Cylinders






Linear Cylinders

TÜNKERS Linear Cylinders combine in one compact housing the pneumatic drive mechanism, a precise guide rod running in dual bearings and the electric position sensing system. In addition, the V Series versions incorporate a mechanical end position lock. Due to their special technical properties, TÜNKERS Linear Cylinders are suitable for positioning tasks, locking operations and staking functions, for example.

High precision:


very good guide capacity due to wide bearing support for the piston rods

Zero-backlash bronze/graphite bushes, manually fitted, ensure precise guide capacity

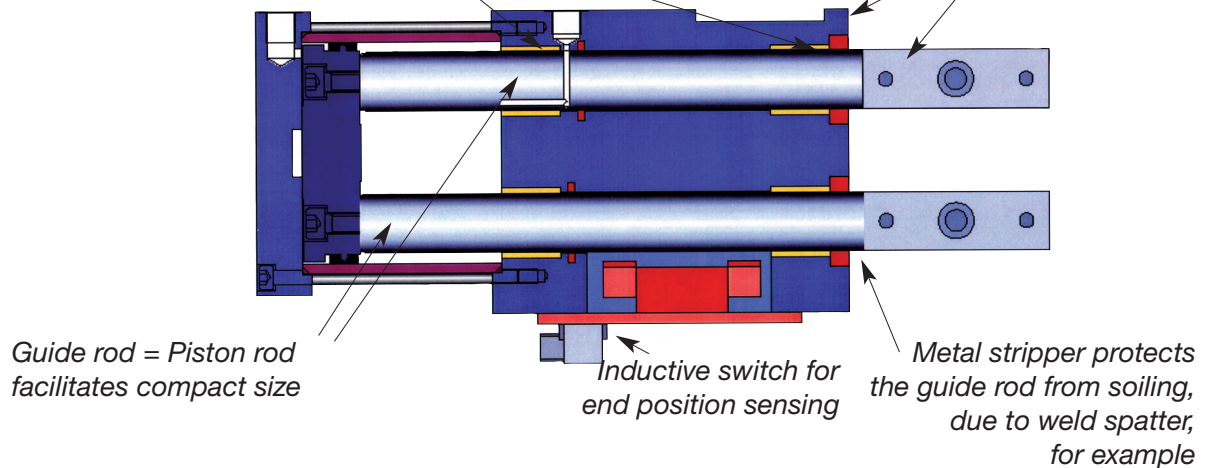


Version with mechanical end position locking

Pushrod with dual bearings with optimum guide capacity, bronze/graphite bushes



Robust knee-lever mechanism with guide rollers running in needle roller bearings

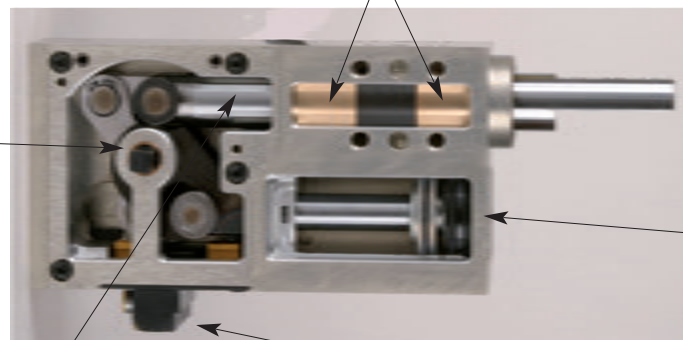

Pneumatic cylinder, Ø 40 mm




Mechanical anti-rotation device with additional roller guide

Position sensing in cassette configuration

Load/displacement cycle using knee-lever mechanism

Higher tensile and thrust forces in the critical end position, for insertion processes or to overcome breakaway forces

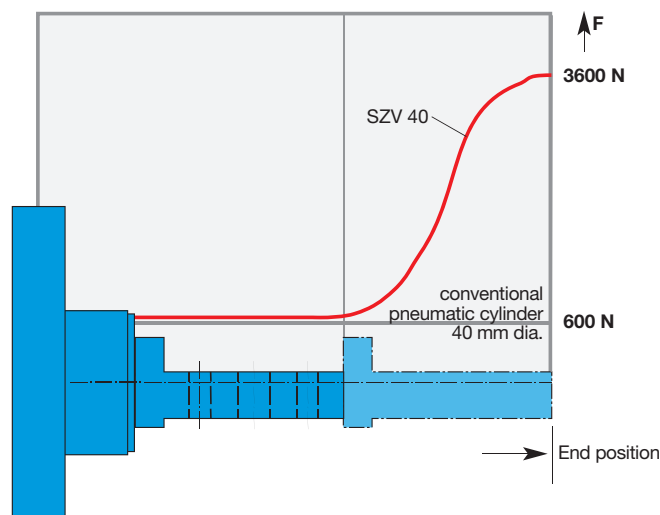

Type	 SZKD 40	 SZKD 63	 SZV.1 40	 SZV 60	 SZVD 50	 SZVD 32
Tensile/thrust force in the end position (kN)	0,6	1,4	4,0	8,0	4,6	0,61
Infeed force (kN)	0,5	1,4	0,8	1,5	0,7	0,16
Stroke (mm)	40	40	40	60	40	25
Locking	No	No	Yes	Yes	Yes	Yes
Weight (kg)	1,4	5	3,5	9,2	7	2
Dimensions (mm)	192x69x43	369x120x45	240x115x45	365x175x80	290x160x64	182x50x100

Type	 MZ 40	 MZ 63	 MZ 80	 MZR 40	 MZR 50	 MZR 63
Tensile/thrust force in the end position (kN)	4	10	25	4	7	10
Infeed force (kN)	0,7	1,75	2,8	0,7	1	1,75
Stroke (mm)	300	50-300	50-300	50-300	50-300	50-300
Locking	Yes	Yes	Yes	Yes	Yes	Yes
Weight (kg)	2,6	4,3	6,7	2,1	4	6,5
Dimensions (mm)	265x100x45	320x160x45	410x200x62	171xdia.54	200xdia.66	228xdia.79




-
- max. transverse force = 80 N
- During assembly, pin only on one side
- M12 x 1
- Sensiq T12
- M2 = 3 Nm
- M1 = 6 Nm
- Adapter position A2B
- Adapter position A1B

2 - 30 |

Positionieren

Positioning

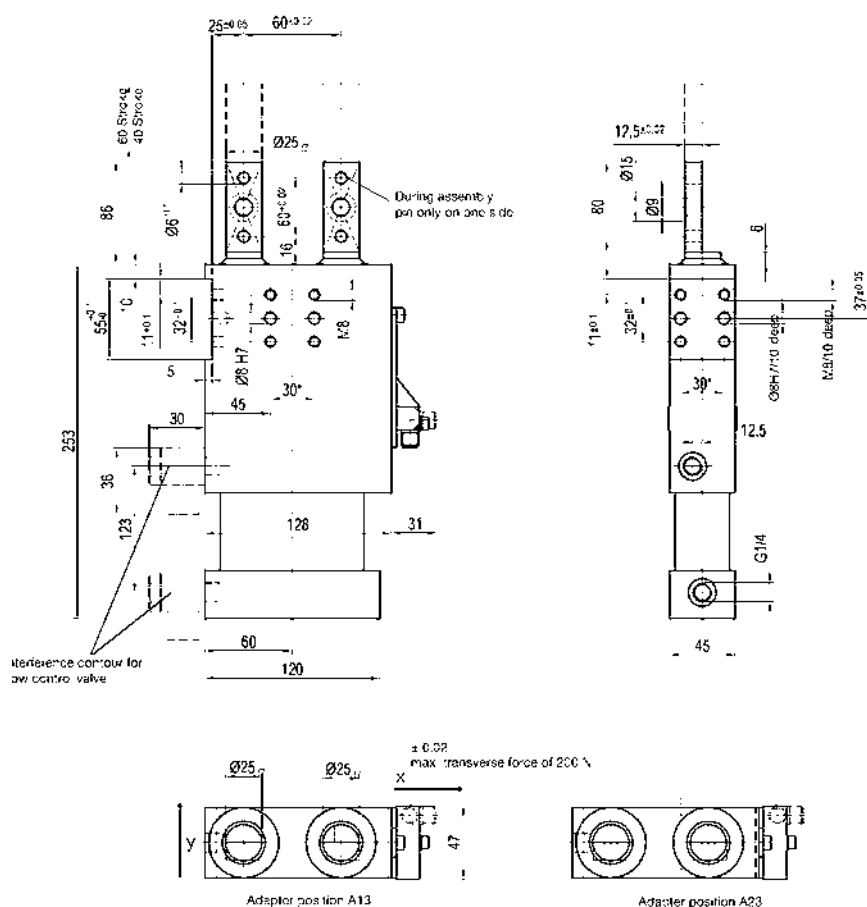

- Tensile and thrust force: 1400 N at 5 bar

Ordering example:

SZKD 63.5 BR3 A13 T12

→ Type

→ Adapter position

→ Position sensing system

Type	Extraction force (kN)	Thrust force (kN)	Ø Cylinder (mm)	Weight (kg)	Dimensions (lxwxh) (mm)
SZKD 63.5 BR3	1,4	1,4	63	4,95	283x18x45

POSITIONING




Linear Cylinder SZV.1 40

POSITIONING




- Slimline housing in monobloc configuration, made of high-strength aluminum material
- Powered by built-in pneumatic cylinder, $\varnothing 40$ mm, which acts on the push rod via a knee-lever mechanism
- High thrust and tensile forces up to 4 kN by means of knee-lever transmission into the end position
- Double-guided push rod running in bronze/graphite bushes
- Mounting options at the side and at the base
- Integral end position sensing in cassette configuration
- Optional: Manual infeed and pneumatic closing

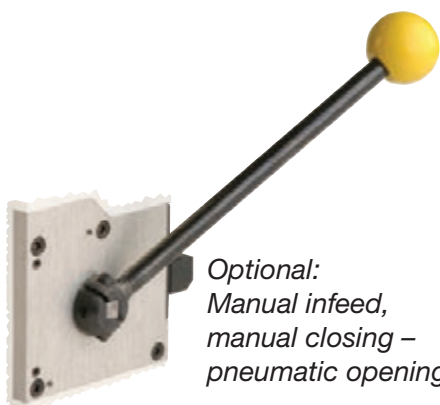

Optional:
Manual infeed,
manual closing –
pneumatic opening

Subject to technical modifications.

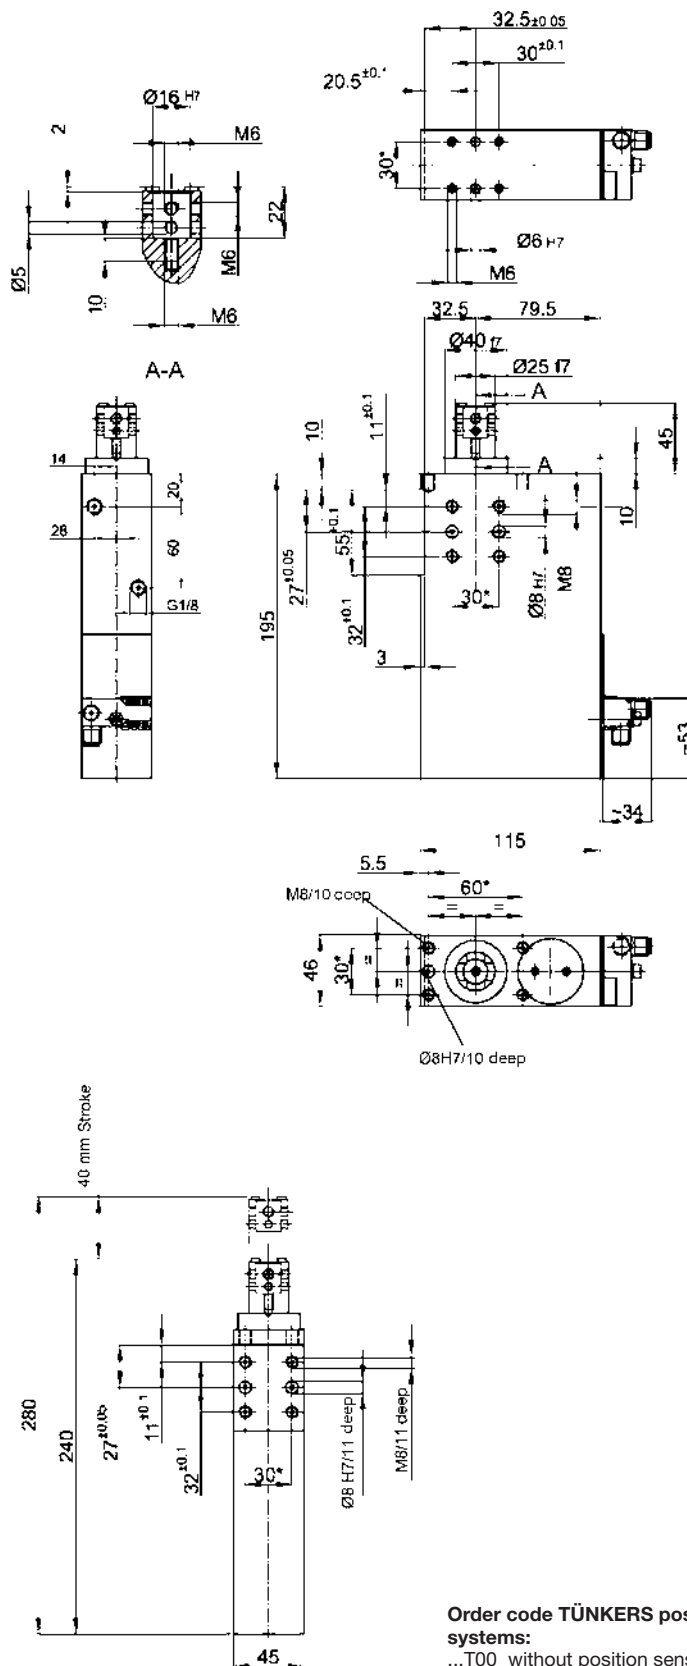

Ordering example:

SZV.1 40 A12 T12
 ↳ Type ↳ Adapter position ↳ Position sensing system


Order code TÜNKERS position sensing systems:

...T00 without position sensing
 ...T12 Inductive position sensing 24 V,
 1 output with integral LEDs

Thrust force: min. 500 N at 6 bar,
 max. in end position 3000 N
 Tensile force: min. 420 N at 6 bar,
 max. breakaway force 3000 N
 Holding force: 5 kN
 Transverse load: 300N
 Piston $\varnothing$: 40 mm
 Weight: 3,4 kg



- Slimline housing in monobloc configuration, made of high-strength aluminum material
- Powered by built-in pneumatic cylinder, Ø 60 mm, which acts on the push rod via a knee-lever mechanism
- High thrust and tensile forces up to 8 kN by means of knee-lever transmission into the end position
- Double-guided push rod running in bronze/graphite bushes
- Mounting options on all sides (at the sides and at the base)
- Integral end position sensing in cassette configuration

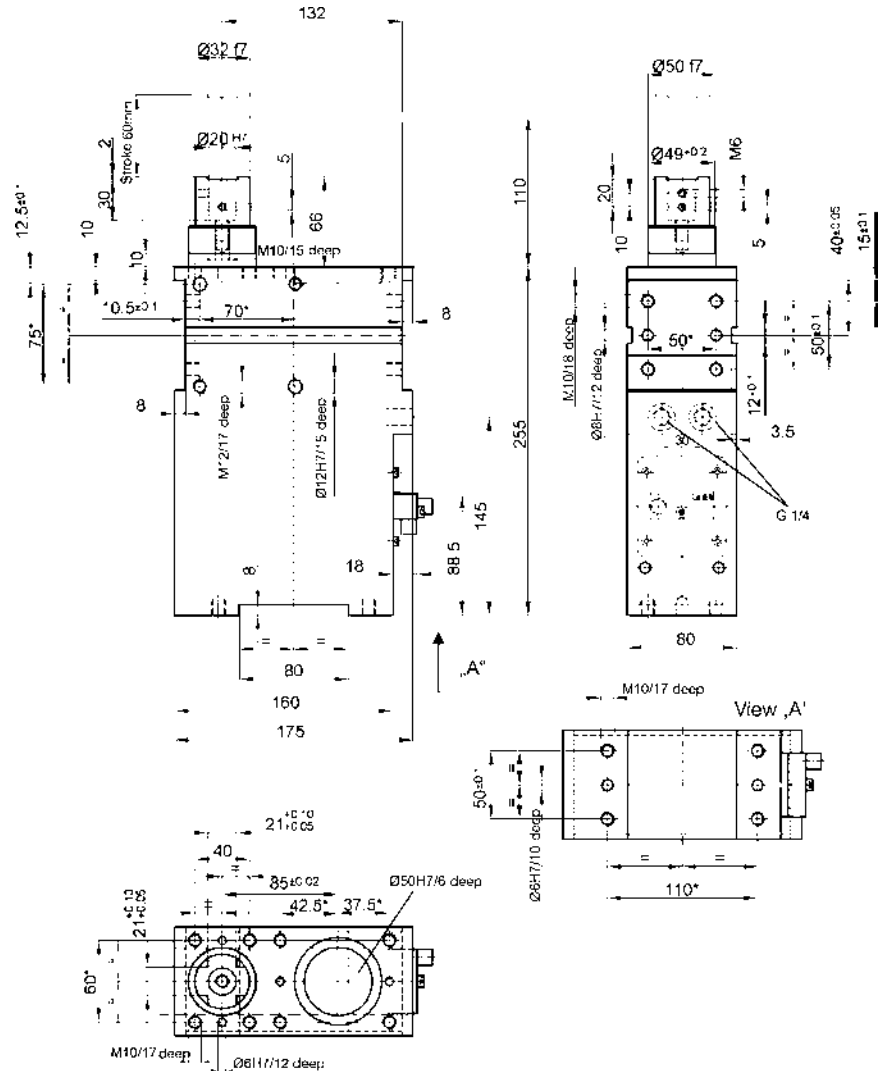

Ordering example:

SZV 60 A12 T12

Position sensing system
Adapter position
Type

Order code TÜNKERS position sensing systems:


...T00 without position sensing
...T12 Inductive position sensing 24 V,
1 output with integral LEDs

Thrust force: min. 880 N at 6 bar,
max. in end position 7500 N
Tensile force: min. 800 N at 6 bar,
max. breakaway force 7500 N
Max. permissible transverse load: approx. 500 N
Weight: approx. 9,2 kg

Subject to technical modifications.



- Slimline housing in monobloc configuration, made of high-strength aluminum material
- Pneumatic cylinder, Ø 32 mm and integral with the housing, synchronously powers the push rods by means of a knee-lever mechanism
- High thrust and tensile forces up to 600 N by means of knee-lever transmission into the end position
- Double-guided push rod running in bronze/graphite bushes
- Mounting options on all sides (at the sides and at the base)
- Integral end position sensing in cassette configuration
- Optional: Manual infeed and pneumatic closing

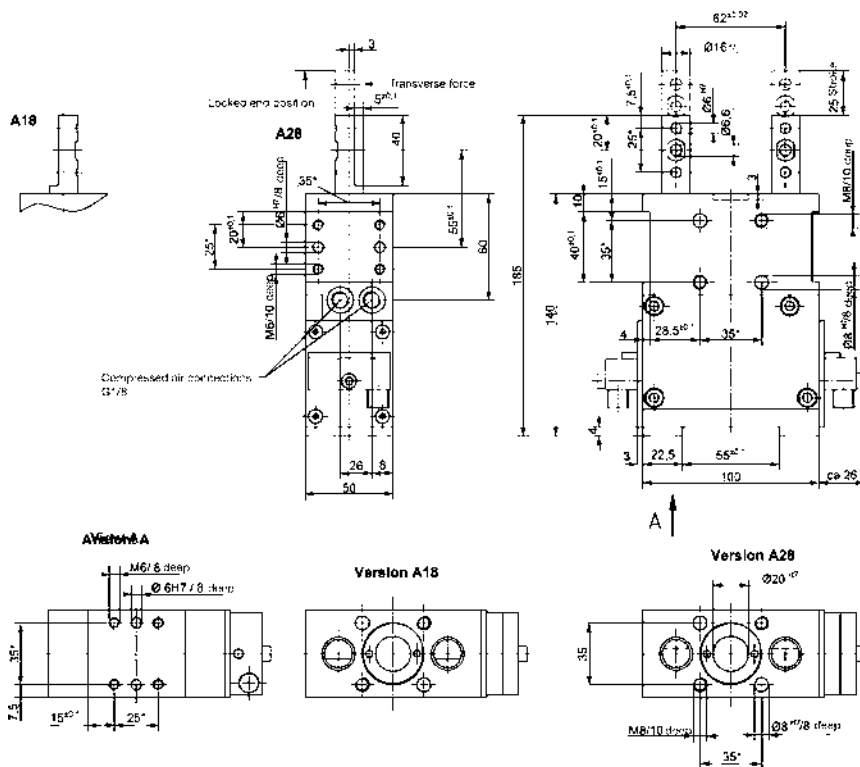

Ordering example:

SZVD 32 A18 T12

└─ Type

└─ Adapter position

└─ Position sensing system

Order code TÜNKERS position sensing systems:

...T00 without position sensing

...T12 Inductive position sensing 24 V,
1 output with integral LEDs

Thrust force: 160 N at 6 bar, max. in end position approx. 600 N

Tensile force: 130 N at 6 bar, max. breakaway force approx. 600 N

Transverse force per piston rod: 250 N

Weight: 2 kg


Max. flexing: 0.1 mm, at max. transverse force and 25 mm stroke

Max. offset: 100 mm from the centre point

Subject to technical modifications.



- Slimline housing in monobloc configuration, made of high-strength aluminum material
- Pneumatic cylinder, Ø 50 mm and integral with the housing, synchronously powers the push rods by means of a knee-lever mechanism
- High thrust and tensile forces up to 2.3 kN by means of knee-lever transmission into the end position
- Double-guided push rod running in bronze/graphite bushes
- Mounting options on all sides (at the sides and at the base)
- Integral end position sensing in cassette configuration
- Optional: Manual infeed and pneumatic closing

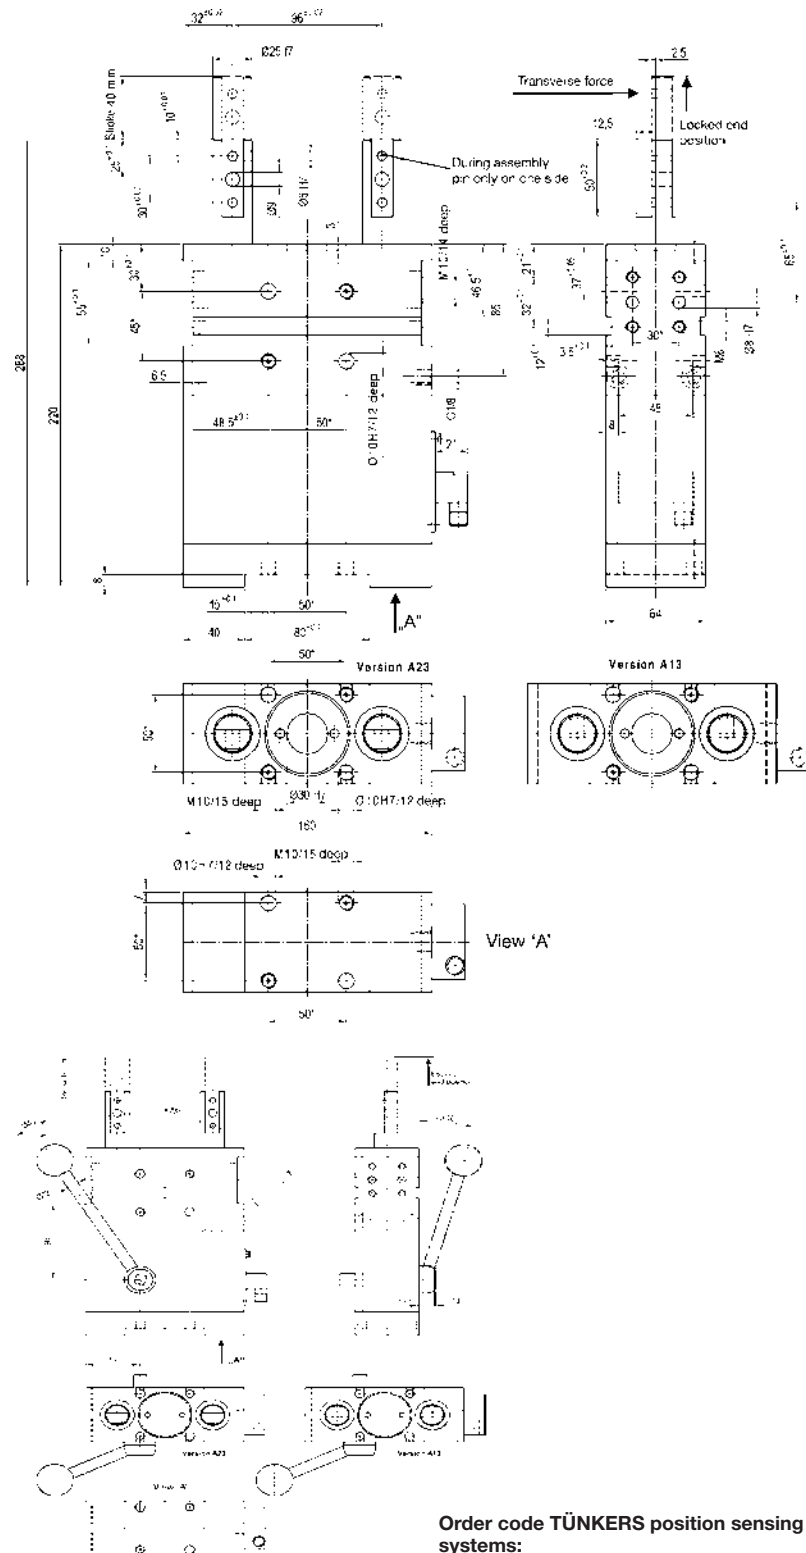

Order code TÜNKERS position sensing systems:

...T00 without position sensing
...T12 24 V inductive position sensing,
1 output with integral LEDs

Thrust force: min. 700 N at 6 bar,
max. in end position
approx. 2000 N

Extraction force: min. 640 N at 6 bar,
max. breakaway force
approx. 2000 N

Side land
per piston rod: 400 N
Max. flexing = 0.1 mm, at max. transverse force
and 40 mm stroke
Max. Offset = 200 mm from the centre point
Weight: 7 kg

Ordering example:

SZVD 50 A13 T12

```

graph TD
    Root[ ] --> Type
    Root --> Adapter[Adapter position]
    Root --> Position[Position sensing system]


```

Subject to technical modifications.




Multi-force Cylinder MZ 40...80

POSITIONING

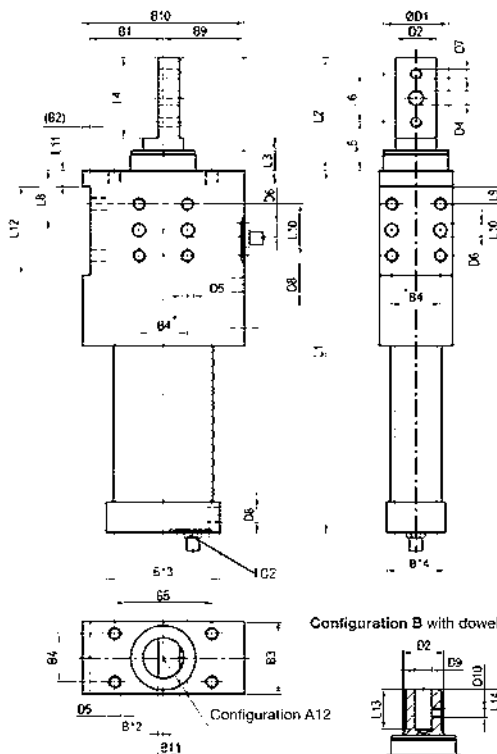


- Cylinder with integrated force transmission at the same level as the locking force in the end position
- Pneumatic cylinder with mechanical force transmission that, in the end position, multiplies the cylinder force by a factor of 8
- Main body and transmission mechanism made of steel
- Pneumatic drive mechanism with circular-section cylinder
- Operating pressure: 4 to 6 bar
- Force transmission by means of wedge mechanism for defined power stroke
- Stroke: 50 to 300 mm



Ordering example:

MZ F 40 V 120 A12 T02

MZ → Type
 F → Adapter position or configuration
 40 → Stroke
 V → Optional: with locking
 120 → Piston Ø
 A12 → Optional: with additional guide
 T02 → Position sensing system

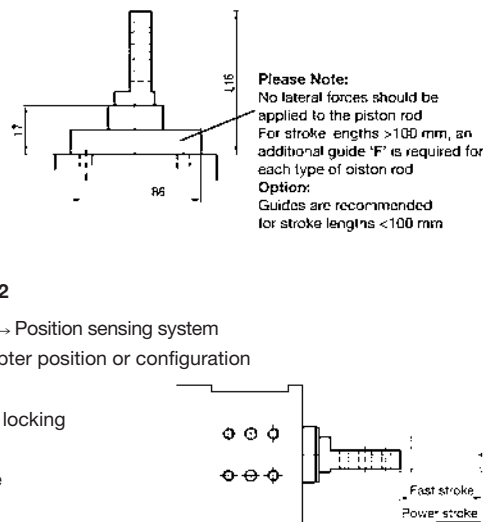

Type	Clamping force of the power stroke at 6 bar (kN)	Power stroke (mm)	Fast stroke force of the fast stroke at 6 bar (kN)	Corresponding Ø Piston (mm)
MZ 40	4	6	0,7	40
MZ 63	10	6	1,75	63
MZ 80	25	6	2,8	80

Fast stroke min. 15 mm
Standard fast stroke series: 50; 100; 150 mm
(does not include the 6 mm power stroke)


Other special stroke lengths on request up to max. 300 mm

Type	B1 ±0,02	B2	B3	B4	B5 ±0,2	B6	B9	B10	B11	B12	B13 ±0,05	B14	D1	D2 H7	D3 H7	D4 H7	D5	D6 H7	D7 H7	D8	D9 H7	D10	D11
MZ 40	45	5	45	30	60	80	50	100	13	3	70	45	40	25	10	9	M8	8	6	G1/8	10	M6	M8
MZ 63	75	5	60	30	85	105	80	160	15	3	120	45	55	30	15	9	M8	8	6	G1/8	16	M8	M12
MZ 80	92	8	80	50	100	125	100	200	20	3	140	62	75	40	25	11	M10	8	8	G1/4	20	M10	M16

Type	L1	L2	L3	L4	L5	L6 ±0,02	L7	L8 ±0,05	L9 ±0,1	L10 ±0,1	L11	L12 ±0,1	L13	L14	L15	L16
MZ 40	195+Stroke	70	12	50	30	30	45	37	11	32	10	55	25	15	41	115
MZ 63	250+Stroke	70	12	50	30	30	55	37	11	32	10	55	40	20	56	125
MZ 80	340+Stroke	80	20	50	40	30	81	55	15	50	15	80	40	20	80	161

Subject to technical modifications.

Multi-force Cylinder MZR 40...63

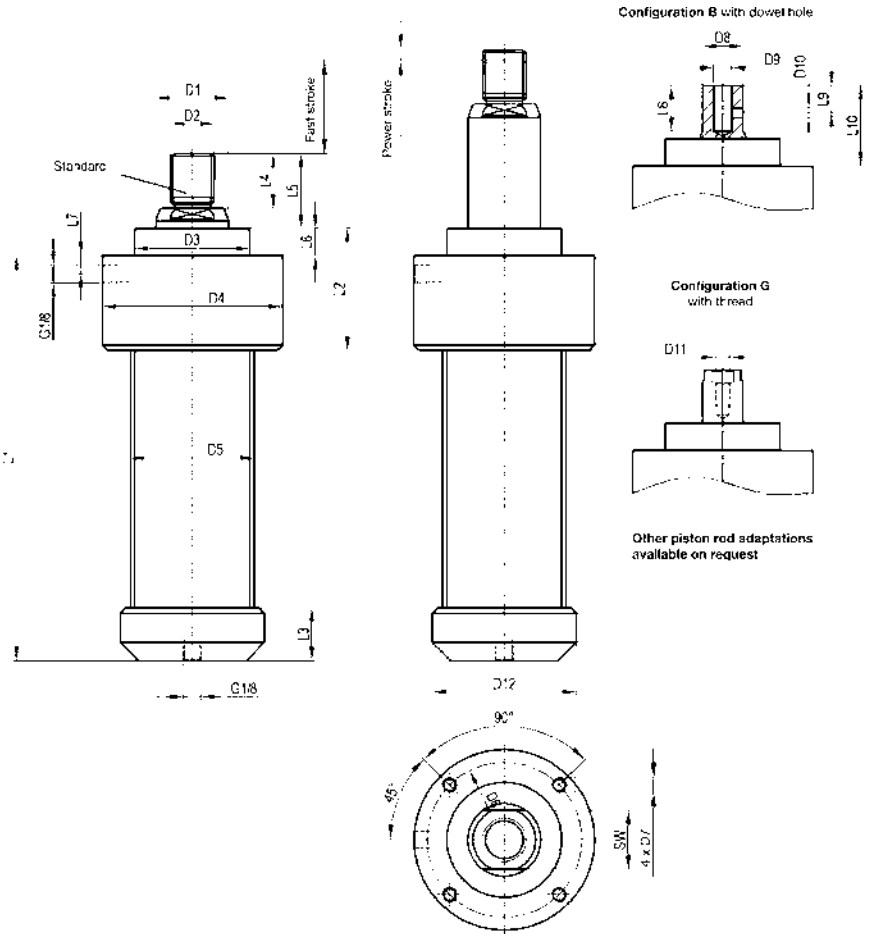

- Cylinder with integrated force transmission for high clamping and locking force in the end position
- Main body and transmission mechanism made of steel
- Pneumatic drive mechanism with circular-section cylinder
- Operating pressure: 4 to 6 bar
- By means of wedge mechanism for defined power stroke
- Stroke: 50 to 300 mm

Ordering example:

MZ **R** **40** **50**
 ↳ Type ↳ Circular-section cylinder - Standard ↳ Piston Ø ↳ Stroke

Optional:

...B: Configuration 'B' with dowel hole
 ...G: Configuration 'G' with internal thread

Standard series of fast strokes: 50; 100; 150 mm
 (does not include the 6 mm power stroke)

Other special stroke lengths on request up to max. 300 mm

Type	Clamping force of the power stroke at 6 bar (kN)	Power stroke (mm)	Fast stroke force of the fast stroke at 6 bar (kN)	Corresponding Ø Piston (mm)	Weight (kg)
MZR 40	4	6	0,7	40	2,1
MZR 50	7	6	1	50	4
MZR 63	10	6	1,75	63	6,5

Type	D1 H7	D2	D3 H7	D4	D5	D6	D7	D8 H7	D9 H7	D10	D11	D12	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	SW
MZR 40	25	M16x1,5	40	63	45	54	M5	25	10	M6	M8	54	130+Stroke	51	23,5	20	29	12	10	25	15	41	21
MZR 50	30	M16x1,5	46	78	60	68	M6	25	10	M6	M8	66	165+Stroke	65	29	20	29	15	10	25	15	44	24
MZR 63	40	M24	63	99	68	85	M8	30	16	M8	M12	79	172+Stroke	51	67	29	30	41	15	10	40	20	56

Subject to technical modifications.




Shot Pin SA 50-25/25

POSITIONING



- Safety shot pin for secure positioning of, for example, roller conveyors, rotary loads and lifts
- Compact version with integrated pneumatic cylinder, integrated guide and position sensing
- Aluminum housing with robust guide for staking pins
- Safety switch for the Forward/Back end positions

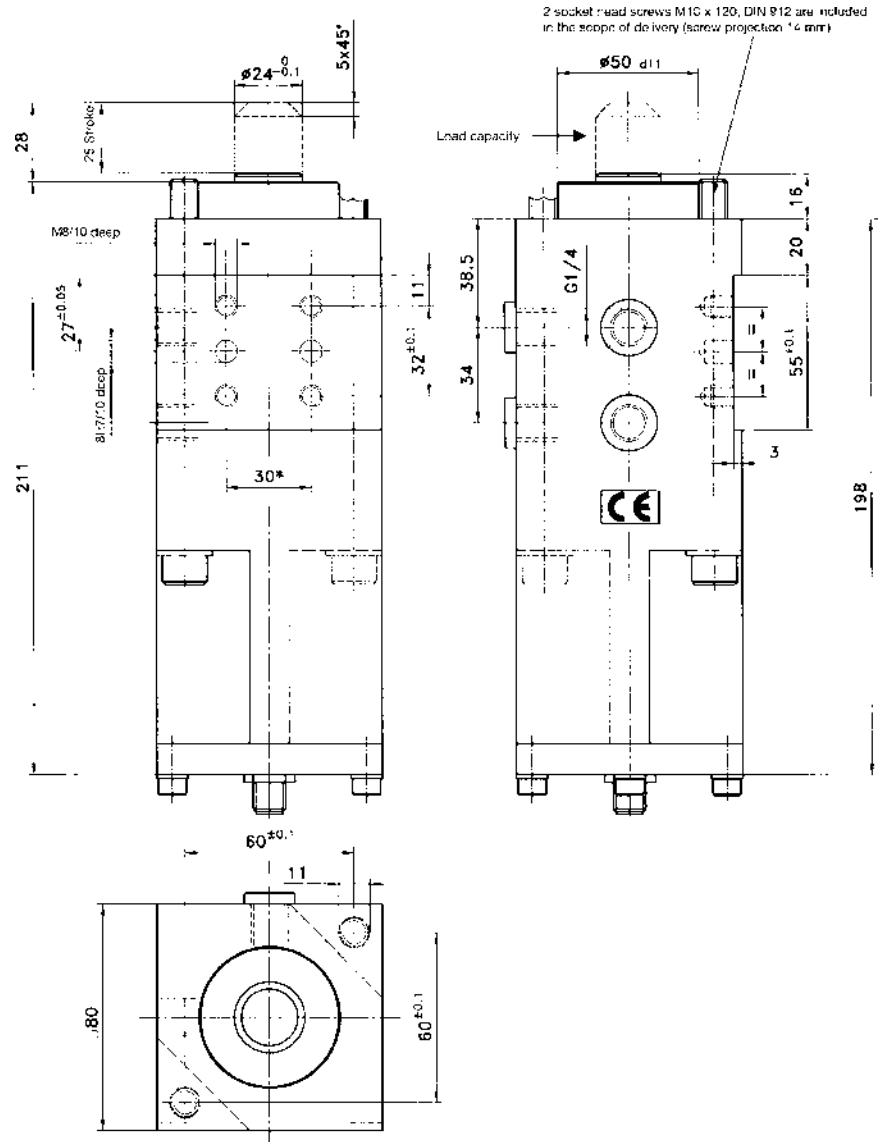

Ordering example:

SA 50-25 25 T01
 ↳ Type ↳ Stroke ↳ Position sensing system


Order code TÜNKERS position sensing systems:

- ...T00 without position sensing
- ...T02 Position sensing system in accordance with VW Standard 39D 1673, with central power supply to both switches
- ...T12 Inductive position sensing 24 V,

Subject to technical modifications.



- Safety shot pin for secure positioning of, for example, roller conveyors, rotary loads and lifts
- With integrated pneumatic cylinder, integrated guide and position sensing
- Aluminum housing with robust guide for staking pins
- Safety switch for the Forward/Back end positions

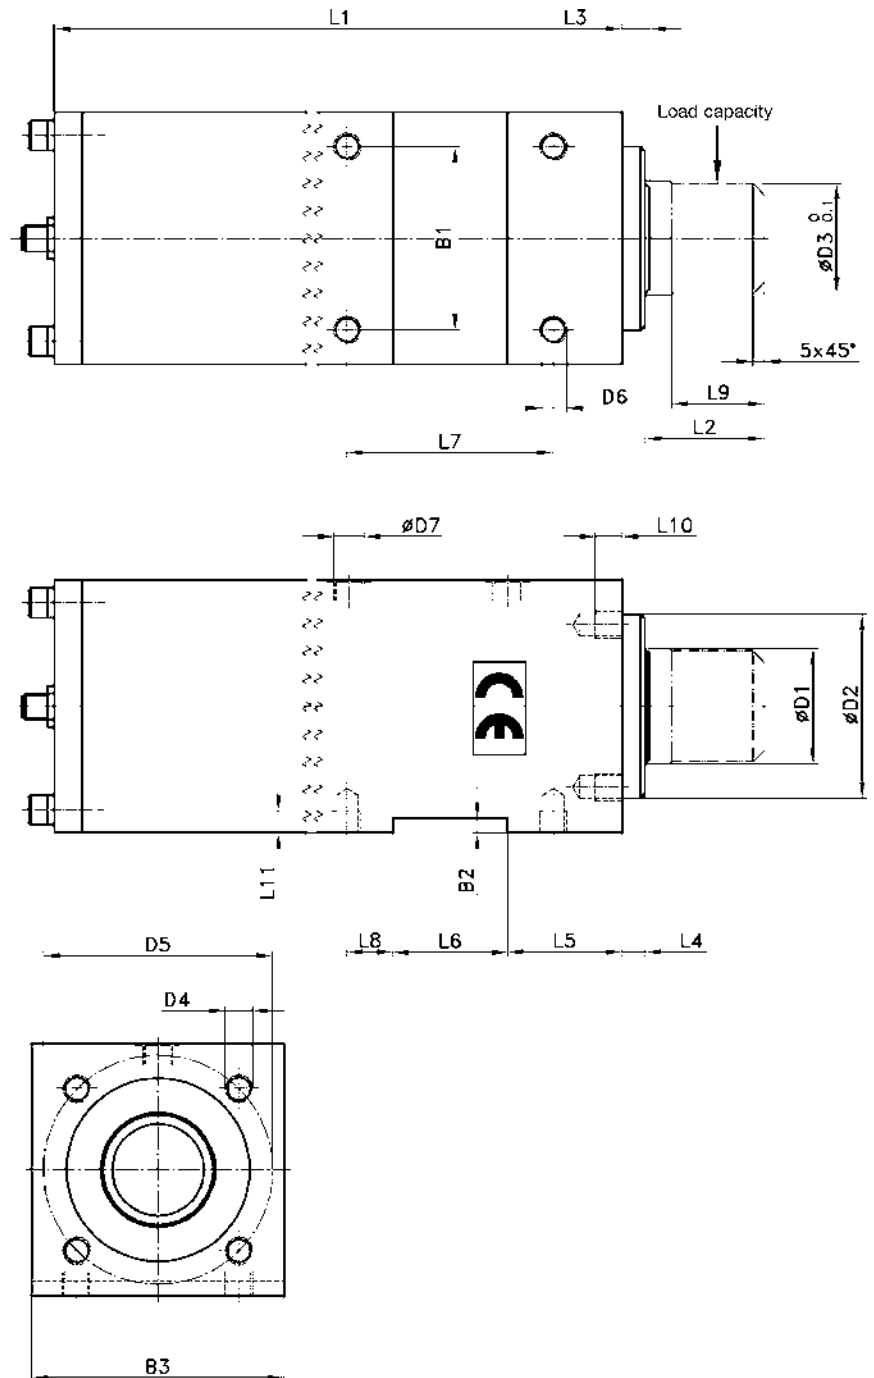


Type	Ø Pin (mm)	Stroke (mm)	Static load capacity (kg)	Weight ~ (kg)	Dimensions l x w x d (mm)
SA 80-50/50	50	50	2200	6	328x110x110
SA 100-70/80	70	80	6000	12	453x135x135

Type	B1	B2	B3 _j	D1 ₁₇	D2 ₁₇	D3 _{+0,1}	D4	D5 _{+0,1}	D6	D7	L1	L2	L3	L4	L5	L6 _{+0,1}	L7	L8	L9	L10	L11
SA 80-50/50	80	6	110	50	80	48	M12	105	M12	G1/4	328	52	12	10	50	50	90	20	40	16	17
SA 100-70/80	95	6	135	70	110	68	M16	140	M16	G3/8	453	85	15	10	70	150	200	25	60	25	20

Subject to technical modifications.




- Safety shot pin for secure positioning of, for example, roller conveyors, rotary loads and lifts
- Modular construction with separate guide housing and external flange-mounted standard cylinder
- Single staking pin
- Optional switching mechanism with mechanical safety switches

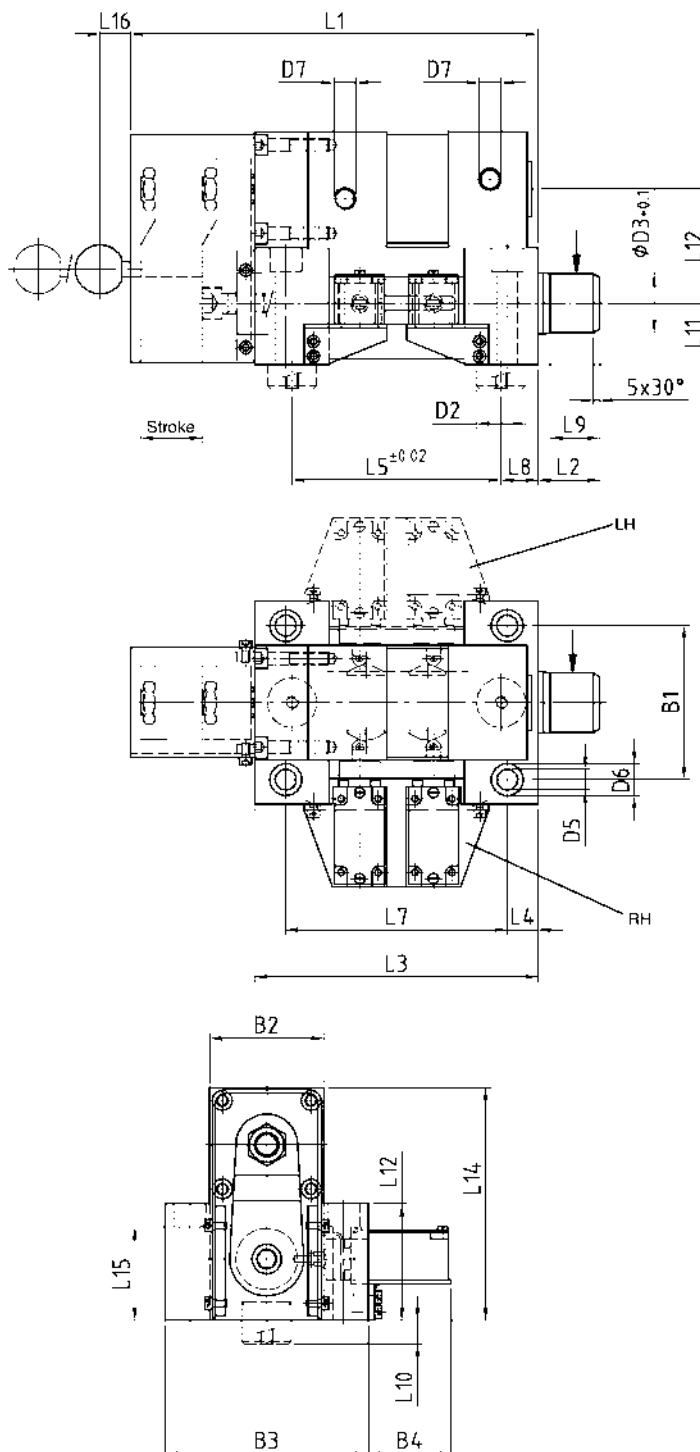


Type	Ø Cylinder (mm)	Stroke (mm)	Static load capacity (kg)	Weight ~ (kg)	Dimensions l x w x d (mm)
SAN 40-25/50	40	50	3000	9	241x201x124
SAN 50-25/25	50	25	8000	9	205x197x119
SAN 80-50/25	80	25	22000	24	230x229,5x205
SAN 80-50/50	80	50	22000	24	230x229,5x205

Type	B1	B2	B3	B4	D2 G6	D3	D5 +0,1	D6	D7	L1	L2	L3	L4	L5	L7	L8	L9	L10	L11	L12	L14	L16
SAN 40-25/50	94	64	124	77	30	24	13	-	G1/4	313	50	241	13	201	215	20	25	8	28	69	124	-
SAN 50-25/50	90	64	120	77	30	24	13	20	G1/4	267	25	205	15	165	175	20	25	8	30	66	119	25
SAN 80-50/25	125	93	160	69,5	40	48	17	26	G3/8	275	25	230	25	170	180	30	20	18	50	93	205	25
SAN 80-50/50	125	93	160	69,5	40	48	17	26	G3/8	325	50	230	25	170	180	30	40	18	50	93	205	25


Subject to technical modifications.

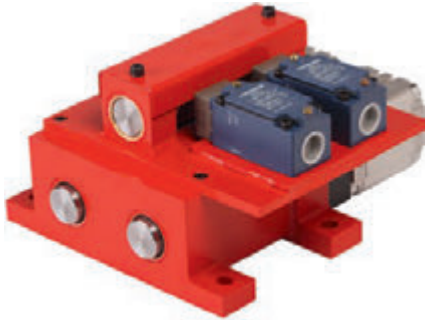

- Safety shot pin for secure positioning of, for example, roller conveyors, rotary loads and lifts
- Modular construction with separate guide housing and external flange-mounted standard cylinder
- With pneumatic drive mechanism
- With dual staking pins
- Optional switching mechanism with mechanical safety switches

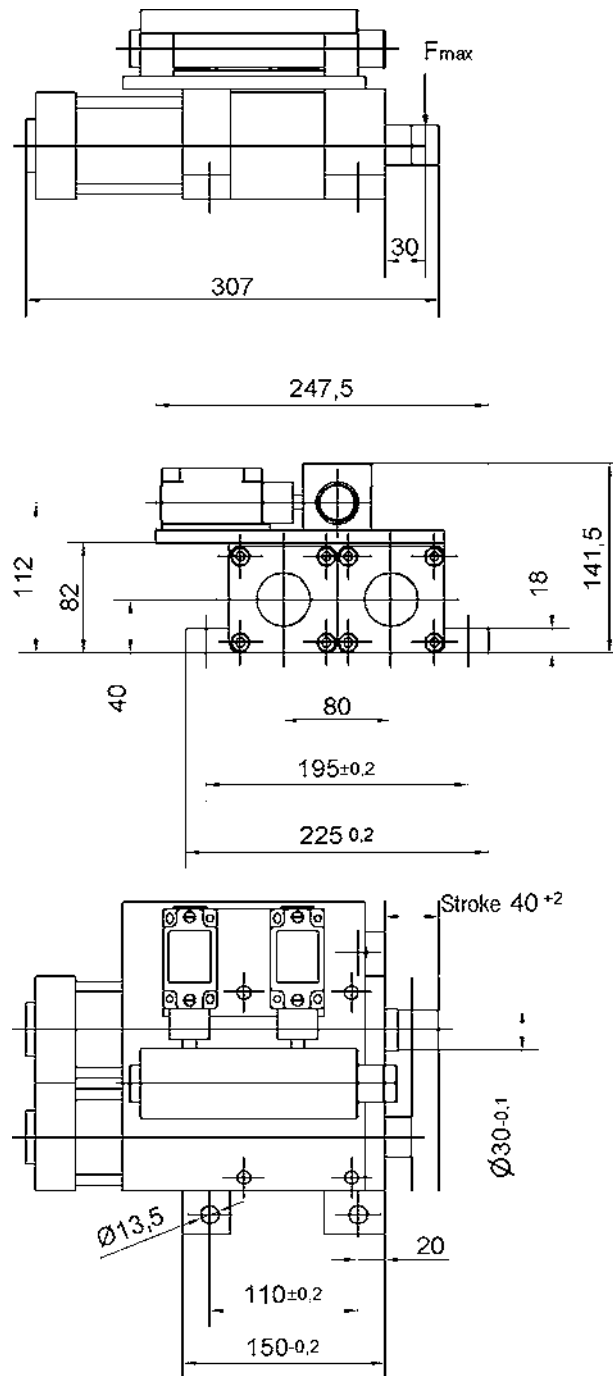

Dowel toggle switch T01S Dowel synchronisation switch T03S

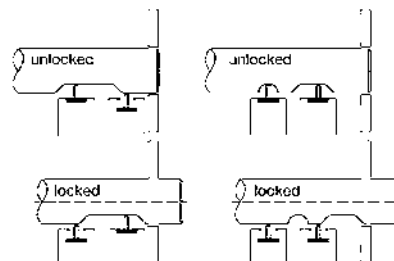


Type	Load capacity (kN)	Staking base Ø (mm)	Stroke (mm)	Dimensions l x w x d (mm)
SAND 50	4,5	30	40	307x247,5x141,5

Subject to technical modifications.




Shot Pin SAND 80

POSITIONING

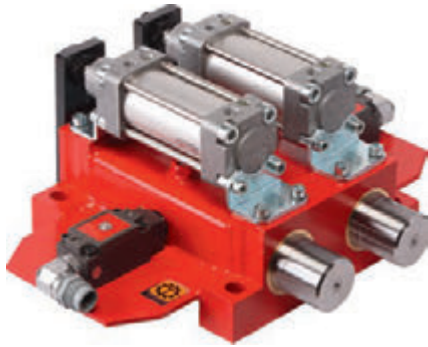


- Safety shot pin for secure positioning of, for example, roller conveyors, rotary loads and lifts
- Modular construction with separate guide housing and external flange-mounted standard cylinder
- Dual staking pins
- Optional switching mechanism with mechanical safety switches

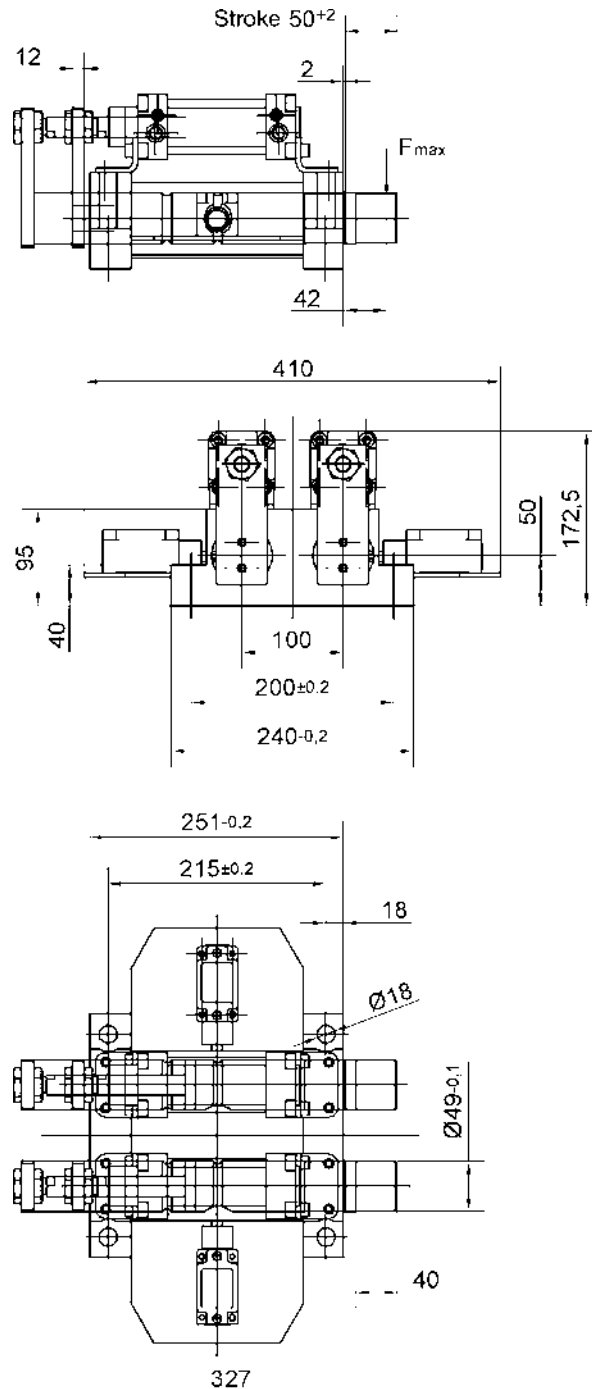

Dowel positions

unlocked

locked

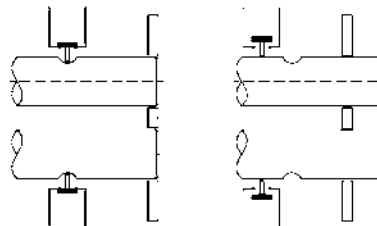

Type	Load capacity (kN)	Staking base Ø (mm)	Stroke (mm)	Dimensions l x w x d (mm)
SAND 80	22	50	50	410x327x172,5

Subject to technical modifications.

POSITIONING

Rotary Units





Rotary Units

Rotary motion is always the simplest solution in order to change tools or fixture components. Not without reason have rotary step drive mechanisms gained acceptance in interchangeable magazines, such as those fitted to machine tools or turret lathes.

The rotary indexing units described here are suitable for torque values from 4 to 40 Nm. Alternatively, the systems can be supplied with 2-, 3- or 4-way partitioning, whereby the end positions are mechanically locked.

As is always the case with TÜNKERS products, the mechanism is fully enclosed and optionally available with end position sensing.


Typical applications:

Rotary indexing unit for swivelling-in 4 different positioning dowels





- Rotary table for reversing operations up to 135°
- Dial with robust bearing support for max. loads of 3,000 N
- Powered by pneumatic clamping unit
- End position mechanically locked
- Straightforward control with 5/2-way valve
- Optional: Shock absorber for end position location
- End position switch

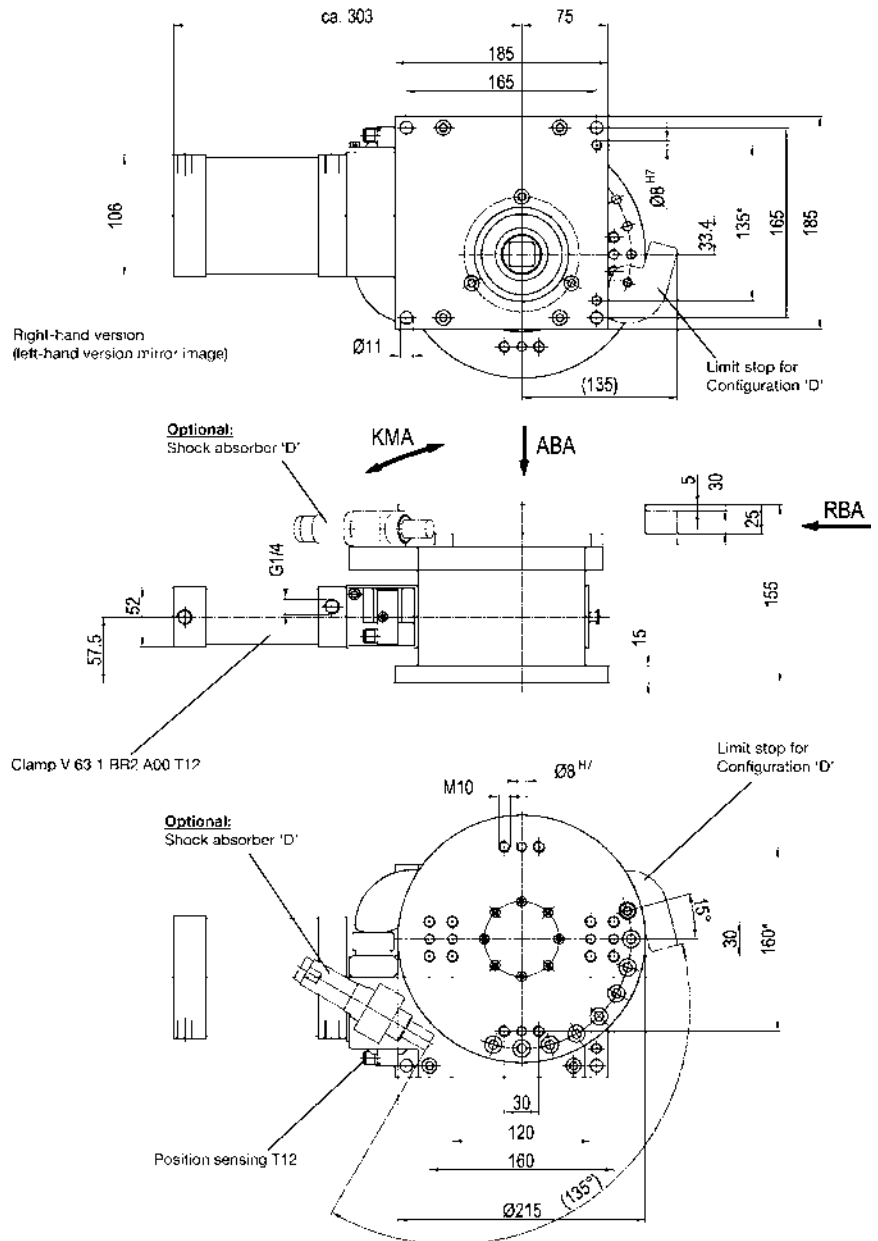

Type	Loading force ABA (N)	Radial load RBA (N)	Overturning torque KMA (Nm)	Ø Cylinder (mm)	Weight (kg)	Dimensions l x w x d (mm)
TD 215	3000	2000	80	63	approx. 14	351,5x185x155

Subject to technical modifications.




- [illegible]

Subject to technical modifications.



- Basic housing in practical aluminum configuration
- Ø 50 mm dial with axial and radial bearings
- Powered by two pneumatic sliders for clocked motion with 2-, 3- or 4-part partitioning (180°/120°/90°)
- Mechanically locked, zero-backlash end position
- End position sensing with inductive switches

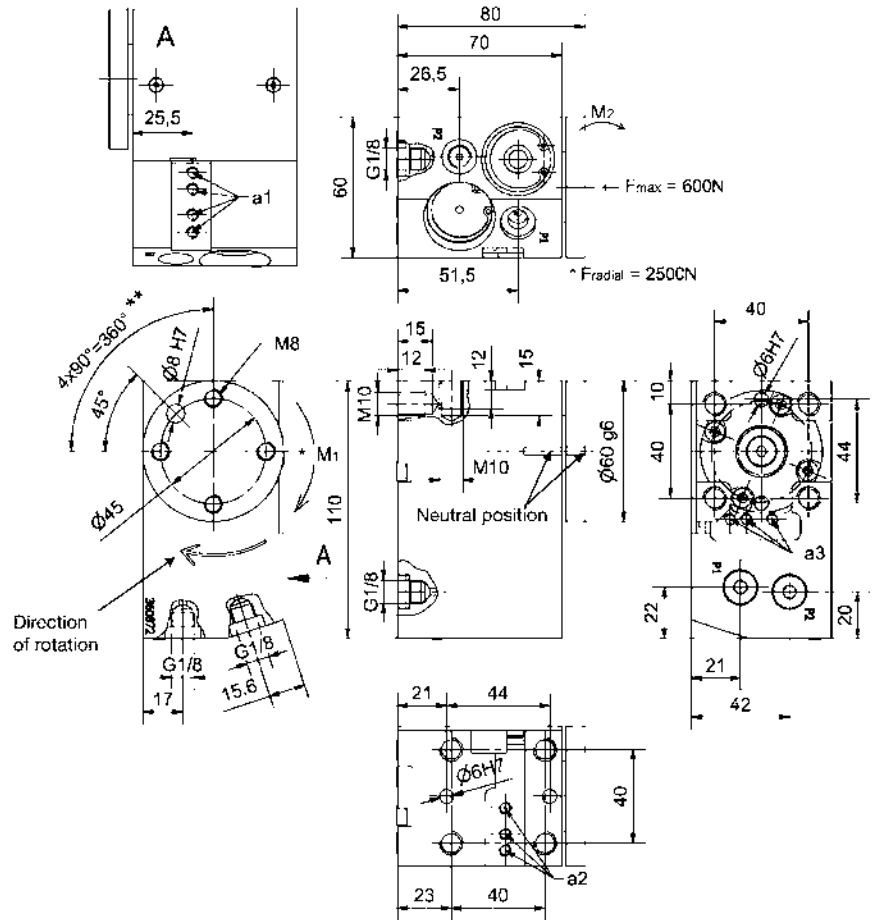

Ordering example:

RT 4-C 4 T12 a1
 ↳ Type ↳ Partitioning: 4 = 90° ↳ Assembly T12 ↳ Position sensing system

Order code TÜNKERS position sensing systems:

...T12 Inductive position sensing 24 V, 1 output with integral LEDs

Mounting thread M12 x 1, 4-pole

Technical data:

Positioning accuracy: $\pm 0,1^\circ$

Partitioning accuracy: $\pm 0,02^\circ$

Repetition accuracy: $\pm 0,02^\circ$

Torque M1: 4 Nm at 6 bar

Tilting moment M2: max. 40 Nm

Weight: approx. 1,7 kg

The position sensors should only be interpreted after the traversing movement, since incorrect interpretation can occur during the movement.

Type	Torque (kN)	Ø Cylinder (mm)	Weight (kg)	Dimensions l x w x d (mm)
RT4-C	4	25	1,7	110x80x60

Subject to technical modifications.






Rotary Indexing Table RT 40 BR2

POSITIONING



- Basic housing in enclosed aluminum configuration
- Ø 90 mm dial, with axial and radial bearings
- Powered by two pneumatic sliders for clocked motion with 2-, 3- or 4-part partitioning (180°/120°/90°)
- Mechanically locked, zero-backlash end position
- End position sensing with inductive switches

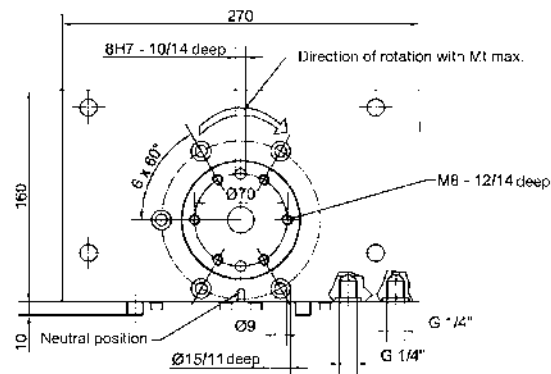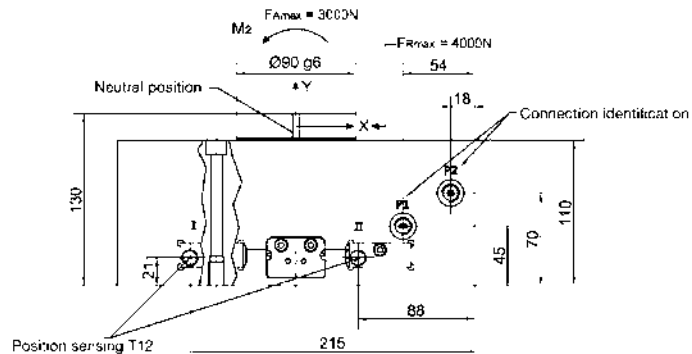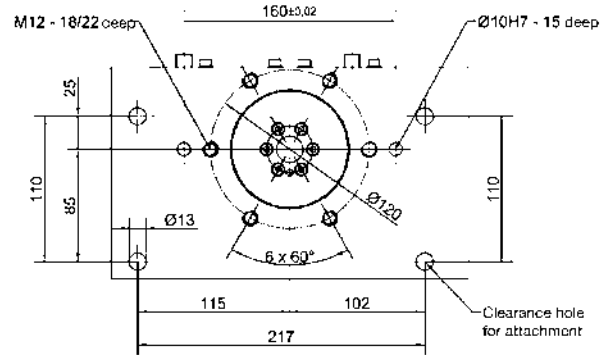

Ordering example:

RT 40 2 T12
 ↳ Position sensing system
 ↳ Partitioning: 2 = 180°; 3 = 120°; 4 = 90°
 ↳ Type

Order code TÜNKERS position sensing systems:

...T12 Inductive position sensing 24 V,
 1 output with integral LEDs

Torque: 40 Nm at 6 bar
 Tolerance for dowel holes ±0.02, for threaded holes ±0.1
 Medium: Compressed air, max. 6 bar, operation with oil-free air permissible

Technical data:

Positioning accuracy: ±0,1°
 Partitioning accuracy: ±0,02°
 Repetition accuracy: ±0,02°
 Torque M_{tmax} : 40 Nm at 6 bar
 Radial force F_{Rmax} : 4000 N (at 64 Nm tilting moment)
 Tilting moment max. M_z : 64 Nm = $F_r \times (Y+0,016)$ m
 Axial force F_{amax} : 3000 N
 Pneumatic locking torque: approx. 50 Nm
 Weight: approx. 14 kg

Type	Torque (kN)	Ø Cylinder (mm)	Weight (kg)	Dimensions l x w x d (mm)
RT40	40	60	14	270x170x130

Subject to technical modifications.


POSITIONING

Lifters





- Enclosed aluminum housing in with multi-sided mounting options
- Two push rods running in graphite bushes
- Powered by Multi-force cylinder located in the housing, with end position locking
- End position sensing
Forward/Back with inductive sensors

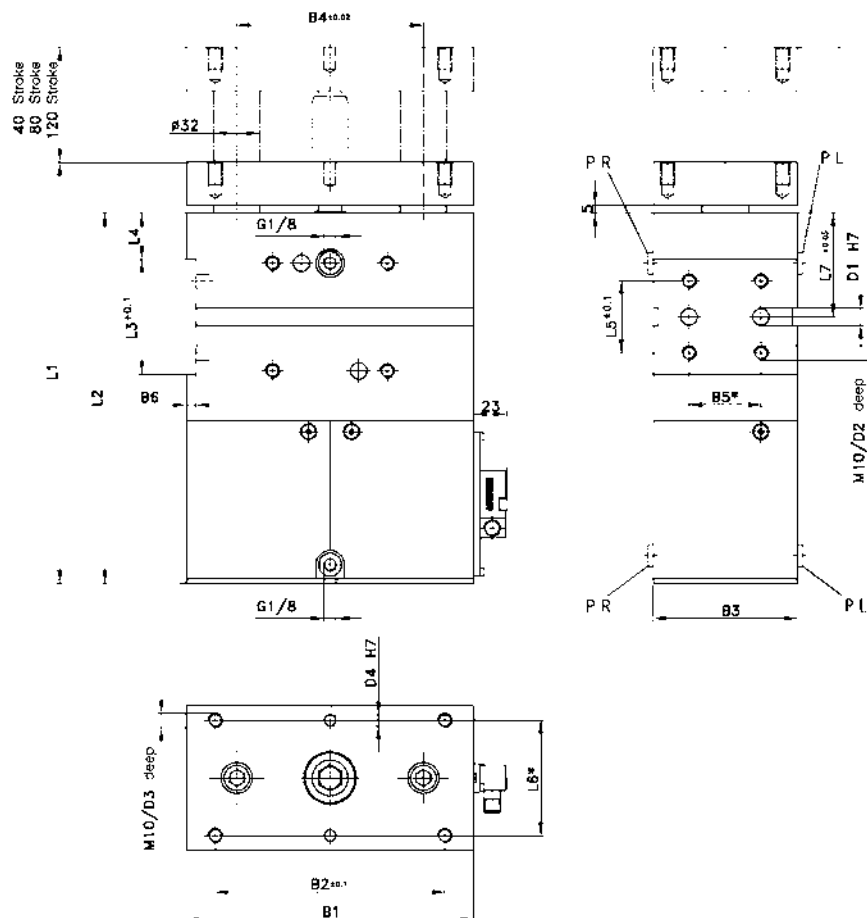

Ordering example:

MZVD 40 80 PL T12

↓ Type ↓ Stroke ↓ Pneumatic connection on the left (PR = right) ↓ Position sensing system

Order code TÜNKERS position sensing systems:

...T00 without position sensing


...T12 Inductive position sensing 24 V, 1 output with integral LEDs

Type	Fast stroke (kN)	Clamping force (kN)	Ø Cylinder (mm)	Weight ~ (kg)
MZVD 40-40	0,4	4	40	17,5
MZVD 40-80	0,4	4	40	19
MZVD 40-120	0,4	4	40	20,5
MZVD 50-40	0,6	7	50	19
MZVD 50-80	0,6	7	50	20,5
MZVD 50-120	0,6	7	50	22
MZVD 63-120	1,2	10	63	35

Type	B1	B2 ±0,1	B3	B4 ±0,02	B5*	B6	L1	L2	L3 ±0,1	L4	L5 ±0,1	L6*	L7 ±0,05	D1 H7	D2	D3	D4 H7
MZVD 40-40	200	160	100	130	50	6,5	253	218	80	32,5	50	80	72,5	12	15	15	8
MZVD 40-80	200	160	100	130	50	6,5	293	258	80	32,5	50	80	72,5	12	15	15	8
MZVD 40-120	200	160	100	130	50	6,5	333	298	80	32,5	50	80	72,5	12	15	15	8
MZVD 50-40	200	160	100	130	50	6,5	287	252	80	32,5	50	80	72,5	12	15	15	8
MZVD 50-80	200	160	100	130	50	6,5	327	292	80	32,5	50	80	72,5	12	15	15	8
MZVD 50-120	200	160	100	130	50	6,5	367	332	80	32,5	50	80	72,5	12	15	15	8
MZVD 63-120	250	200	125	180	70	8	400	340	120	25	80	90	85	12	16	20	12

Subject to technical modifications.

GRIPPING

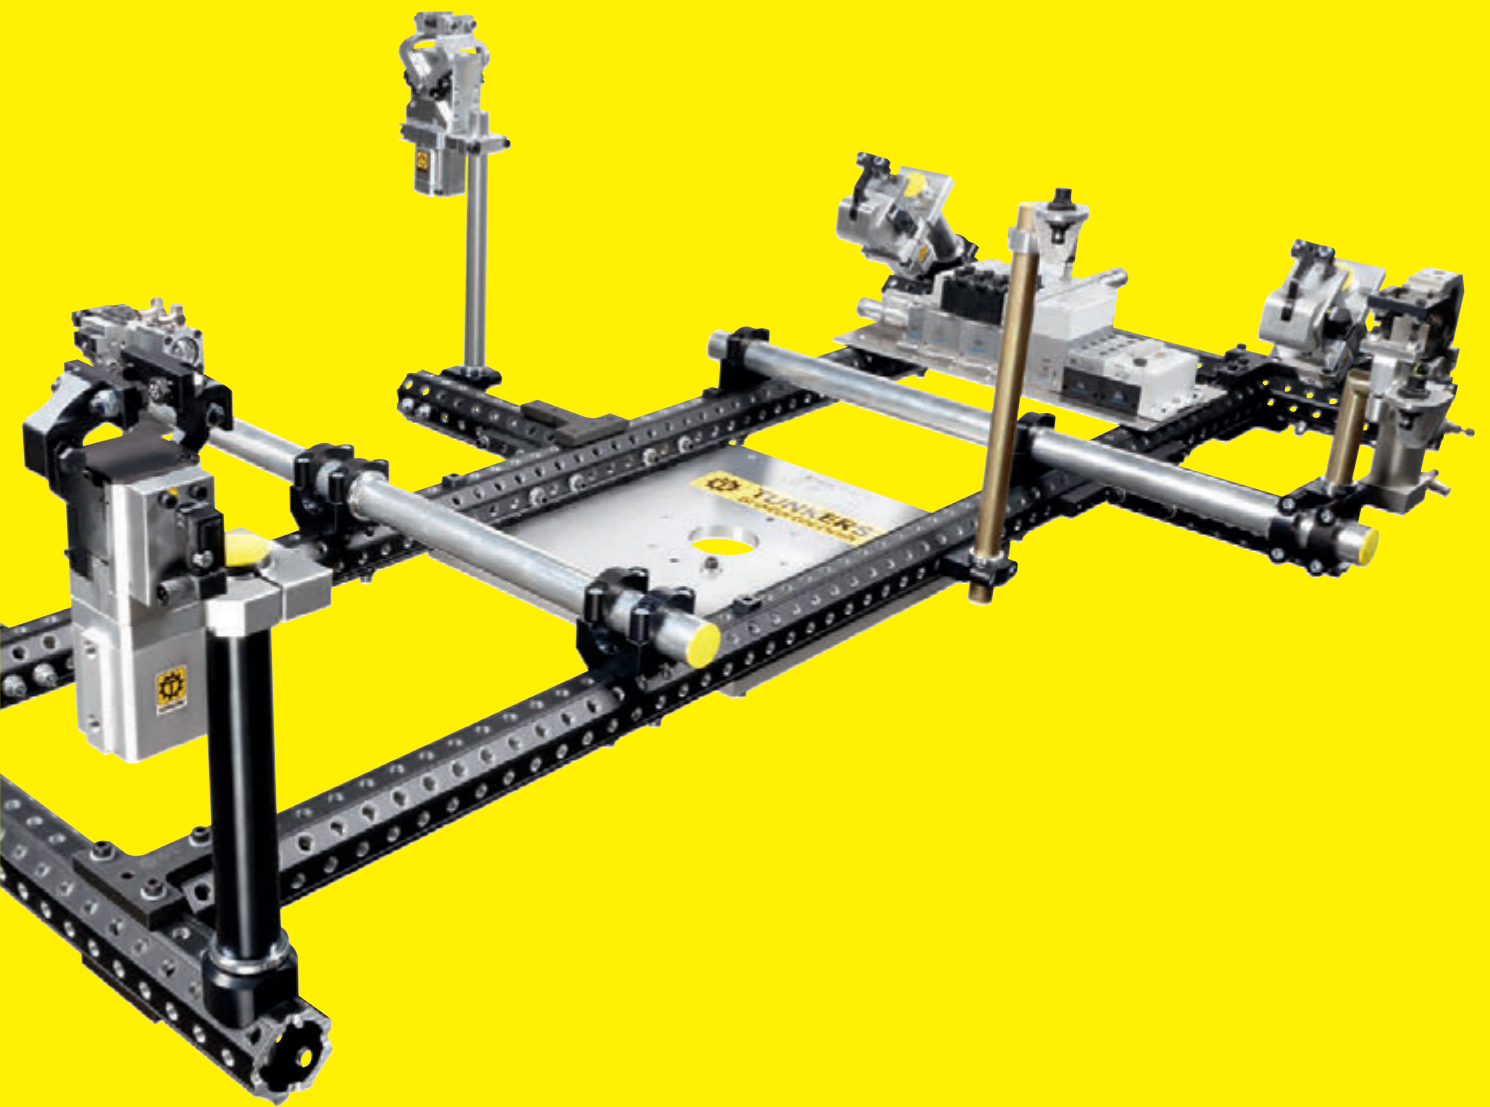



TÜNKERS Gripper Systems – the arms and hands of the industrial robot




Robotic gripper systems have become a standard in today's automotive body assembly lines. With increased performance, robotic handling has replaced conventional transport systems like shuttle and conveyor systems. They do not only move small and add-on parts, but also side panels, complete underbody groups and - for the first time now - even entire car bodies.

In special designs, robotic grippers are now also used for processes including handling procedures using welding guns, glueing or clinching units and in some cases, they even have geometric functions.

While until a couple of years ago, steel welding frames used to be the backbone of robotic grippers, modular systems are the state of the art now.

GRIPPING



TÜNKERS Round Tube System (TRR) _____		3-7
TÜNKERS Carbon Fibre Tube System (TCR) _____		3-11
TÜNKERS One Screw System (TOS) _____		3-17
Euro-Gripper-Tooling System (EGT) _____		3-23
TÜNKERS Machine Tools for Gripping, Clamping and Positioning _____		3-28
Special Products _____		3-29
Services _____		3-30



Introduction

Gripper and handling technology is the core competency of the comprehensive TÜNKERS product range. The portfolio includes a variety of system solutions, based on force-closed and form-closed concepts. The principal application for these grippers is the body in white production, in which handling, process and geometric applications are implemented. Due to the flexible nature of the car body, gripper tasks can also be performed in other aspects of automobile technology.

Versatility and flexibility

In addition to standard TÜNKERS® Round tube, Carbon tube, One Screw or Euro-Gripper-Tooling, we also offer customer-specific products in customised form. On request, our sphere of competence also includes special products.

Worldwide experience and problem-solving expertise

With eight production plants for grippers around the world and a total of approx. 14,000 gripper systems supplied to date, TÜNKERS is a strong business partner. Our handling systems are used by many original equipment manufacturers in the automobile sector, including, for example, Audi, BMW, Daimler, Ford, GM, Land-Rover, Renault, Volvo, Volkswagen or Skoda. As specialists in gripper systems, with this background experience we are able to react flexibly to problems of any kind and to offer you prompt and competent potential solutions to design challenges, for example.

TÜNKERS as system supplier

In implementing gripper projects, if required we can offer you integrated solutions. These include:

- Design consultancy and the creation of gripper system concepts
- Project management and ongoing contract implementation
- Mechanical assembly, including the production of special components and the procurement of parts
- Installation of pneumatically- and electrically-operated components
- 3D measurement and documentation
- On-site commissioning

In the first instance, please make direct contact with your local Field Service Team or send an e-mail to gripper@tuenkers.de.

In designing a gripper system, the user is faced with the choice of either a modular system or a gripper of welded construction. The advantages of modular construction are self-evident:

Key factors

Maintenance:

- No need for replacement systems, as is frequently the case with welded-construction gripper systems
- Faster replacement of components
- For maintenance, modular grippers only require a small number of standard spare parts

Weight:

- Lightweight precision round tubes out of aluminum, thin-walled steel or carbon fibre semi-finished products
- Weight reduction to retain or downgrade the category of robot

Flexibility:

- Rapid adaptation to short-notice modifications to components, for example expansion to accommodate an additional clamping station
- Combination of the various round tube gripper systems is possible → similar tube diameter and offsets of the clips
- Weight reduction due to the use of carbon fibre components

Delivery times:


- Standard components in stock
- Available worldwide

Costs:

- Design costs - Standardised 3D-CAD libraries mean the design becomes simply 'composition'
- Storage costs – Small variety of parts, few special-production parts required
- Project costs – Volume production in high numbers at low prices

1. Gripper base plate

Versions in the form of sheet aluminum or sheets of composite material in a variety of material thicknesses and dimensions, compatible with the size of the gripper and the weight of the component.



2. Modular base frame

Mainly responsible for the overall rigidity of the system. Depending on the system, the base frame can be in the form of circular- or octagonal-section tubing.




3. Connections

Extensions/gripper arms for connecting actuators and pins to the base frame.



4. Machines for gripping, clamping and positioning

Lightweight Tünkers actuators provide for a dynamic approach.

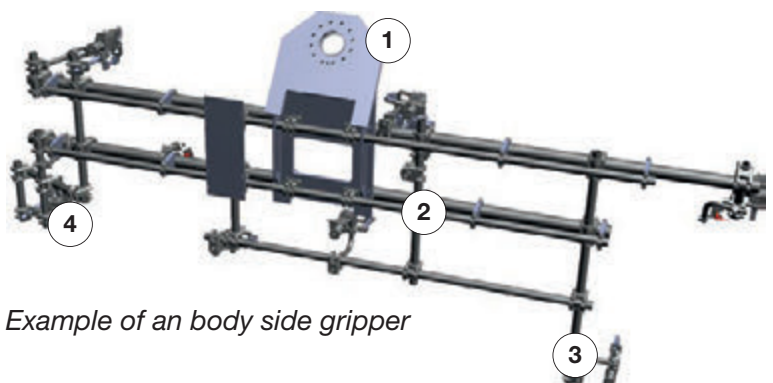

Example of an body side gripper

GRIPPING

TÜNKERS Round Tube System (TRR)






TÜNKERS Round Tube System (TRR)

From a technical viewpoint, the force-closed TÜNKERS® Round Tube System makes use of the optimum moment of inertia of tubes and, in comparison with square-section forms, they exhibit the ideal relationship between low weight, high rigidity and low vibration levels.

- System consisting of precision aluminum tubes in diameters of 25, 40 and 60 mm
- High geometric flexibility → optimum accessibility to components → positioning possible in all directions
- Similar offset with both aluminum and carbon fibre joints (hybrid system possible)
- Safety in case of a crash → the clips rotate without destroying the machines
- Reproducibility → Scale on GSKN clips or optional reference holes



Gripper system for handling a body side

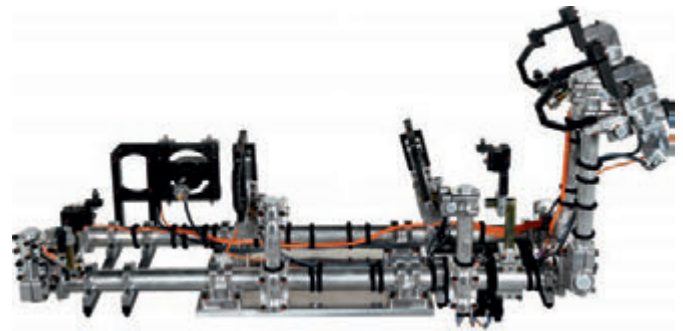

Round Tube Gripper System




Aluminum cross joints – GSKN Series



Precision aluminum tubes Ø 25, 40 and 60 mm



Nonius for precise adjustment

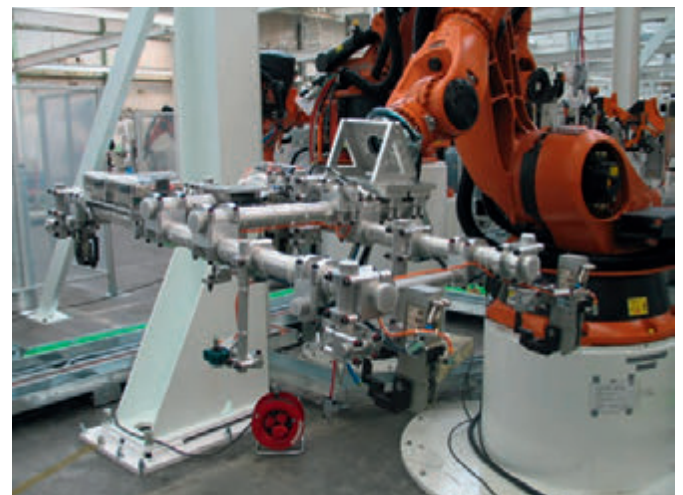

Round Tube Gripper System



Type	Material	Weight	Geometrical moment of inertia I _x	Section modulus W _x
GR 60	EN AW 2007	2,50 kg/m	329376 mm ⁴	10979 mm ³

Ordering information: GR60-...

Profile lengths in 10 mm increments (maximum length 6000 mm)



Type	Material	Weight	Geometrical moment of inertia I _x	Section modulus W _x
GR 40	EN AW 2007	1,83 kg/m	95492 mm ⁴	4775 mm ³

Ordering information: GR40-...

Profile lengths in 10 mm increments (maximum length 6000 mm)



Type	Material	Weight	Geometrical moment of inertia I _x	Section modulus W _x
GR 25	EN AW 2007	1,40 kg/m	19175 mm ⁴	1534 mm ³










Ordering information: GR25-...

Profile lengths in 10 mm increments (maximum length 3000 mm)

Please Note:

All technical data relating to the profiles have been determined using Autodesk Inventor Professional 2014. Tünkers does not guarantee that the actual product exactly corresponds to the technical data provided. Tünkers accepts no liability for damage which may occur as the result of individual use of the product.

System configuration – Base Frames and Gripper Arms

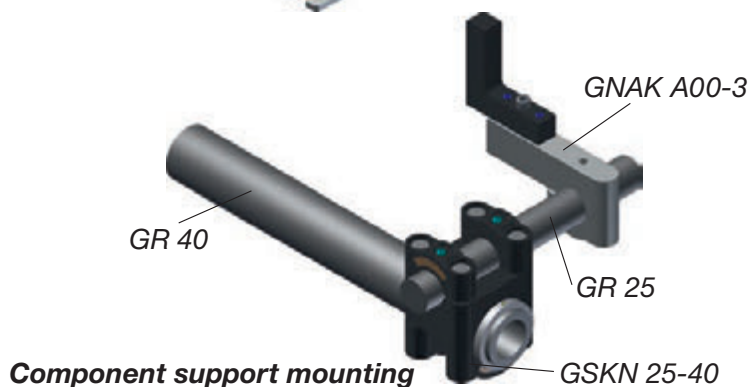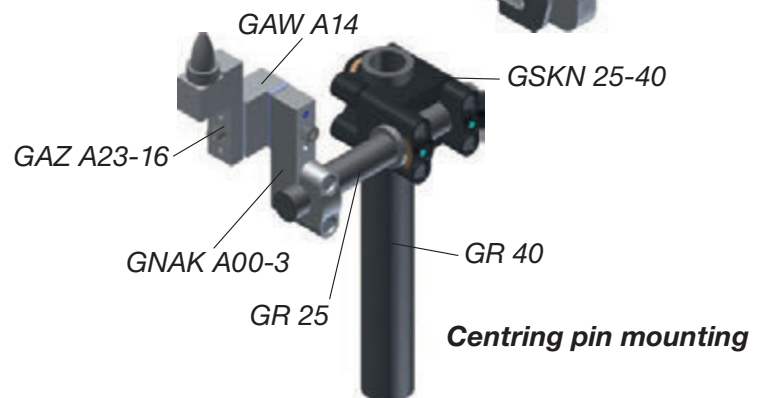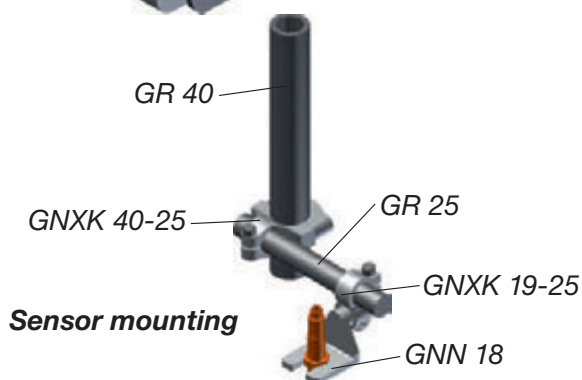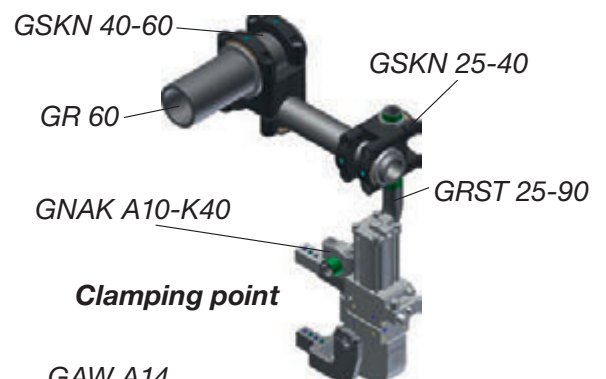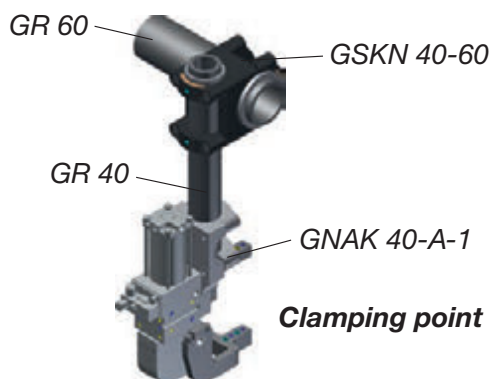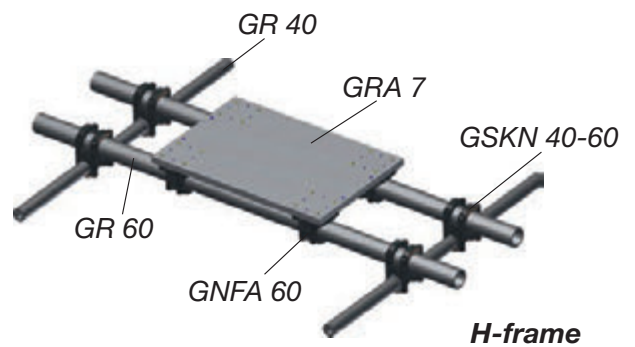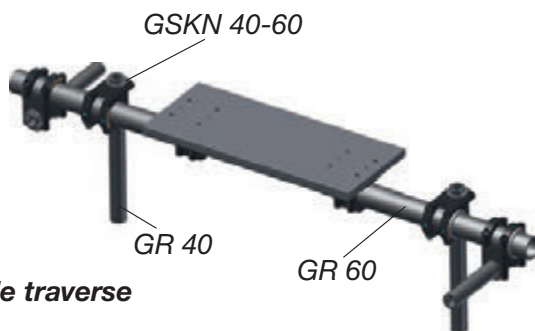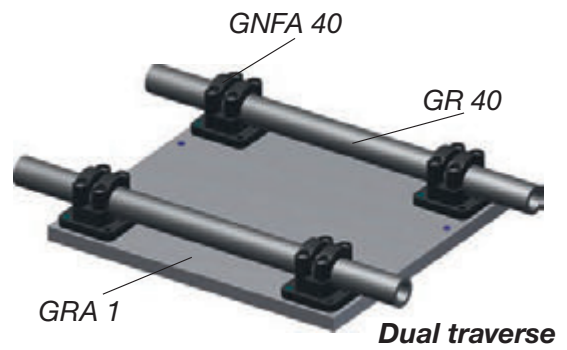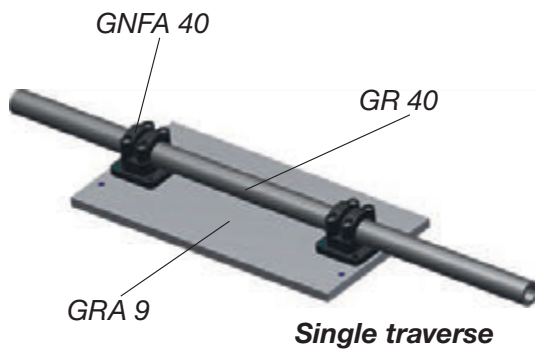

GRIPPING

TÜNKERS Carbon Fibre Tube System (TCR)



From a technical viewpoint, the force-closed TÜNKERS® Carbon Fibre Tube System makes use of the optimum moment of inertia of tubes and, at the same time, the special properties of carbon fibres.

Right at the beginning of the project phase and without knowledge of the component or gripper weight in question, the maximum permissible weight category is defined by determining the type of robot. If this weight category of the gripper solution designed for the actual application is exceeded, apart from selective measures to reduce weight, the designer must resort to using a larger robot, with negative consequences in terms of investment, space requirement (footprint) and cycle time.

With potential weight savings of up to 50%, the TÜNKERS® Carbon Fibre Tube System is a genuine alternative and creates new design leeway, as both a complete system and a hybrid solution, in which aluminum, steel and carbon fibre components can be flexibly combined in one product.

- System consisting of precision carbon fibre tubes in diameters of 25, 40 and 60 mm
- Combination and integration in existing gripper systems possible → similar offset between aluminum and carbon fibre joints
- Weight reduction → Use of a lower category of robot
- In comparison with an aluminum system: weight reduction of 40%, price supplement approx. 20% in terms of the complete gripper system



Precision carbon fibre tubes -
GRC Ø 25, 40 and 60 mm



Carbon fibre cross joints - GKC



'Stingray' – the lightweight carbon fibre bracket
Weight: from 6 kg



Stingray as gripper system –
total weight approx. 30 kg



Example application – transporting 115 kg floor pan



Type	Material	Weight	Geometrical moment of inertia I _x	Section modulus W _x	Surface treatment
GRC 60	CFK	0,85 kg/m	218780 mm ⁴	7293 mm ³	ground

Ordering information: GRC60-...

Profile lengths in 10 mm increments (maximum length 3000 mm)



Type	Material	Weight	Geometrical moment of inertia I _x	Section modulus W _x	Surface treatment
GRC 40	CFK	0,64 kg/m	67450 mm ⁴	3372 mm ³	ground

Ordering information: GRC40-...

Profile lengths in 10 mm increments (maximum length 3000 mm)



Type	Material	Weight	Geometrical moment of inertia I _x	Section modulus W _x	Surface treatment
GRC 25	CFK	0,33 kg/m	12778 mm ⁴	1022 mm ³	ground

Ordering information: GRC25-...

Profile lengths in 10 mm increments (maximum length 3000 mm)


Please Note:

All technical data relating to the profiles have been determined using Autodesk Inventor Professional 2014. Tünkers does not guarantee that the actual product exactly corresponds to the technical data provided. Tünkers accepts no liability for damage which may occur as the result of individual use of the product.

Characteristics of CFK in comparison with steel or aluminum

- Exceptional strength to weight ratio (low weight, high tensile strength)
- High modulus of elasticity, high strength, rigidity and dynamic load-bearing capacity
- Good vibration absorption and dimensional stability
- Heat and corrosion resistance
- Minimal heat expansion
- High fatigue strength, high residual safety

Properties of construction materials in comparison with CFK

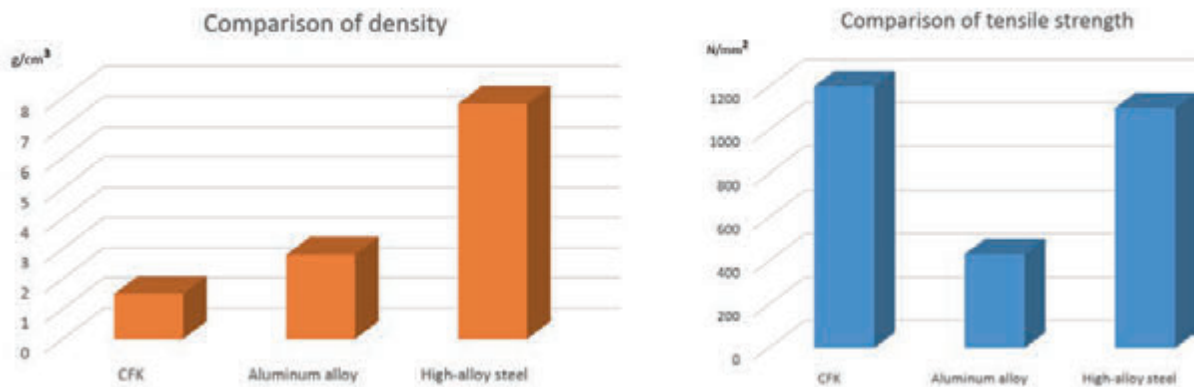

* Exact values are dependent on the alloy material

Tube Ø	Steel (kg/m)	Aluminum (kg/m)	Carbon (kg/m)
25 mm	1,63	1,40	0,33
40 mm	2,31	1,83	0,64
60 mm	(6,78)	2,50	0,85



100 %	≈	52 - 86 %	≈	18 - 26 %
-------	---	-----------	---	-----------

Weight reduction of more than 50 %




- + Rigidity – optimised design
- + Installation space – low interference contour
- + Flexibility – integration into existing systems possible
- + Compatibility – transfer of the existing design

Stingray


- Innovative gripper console
- Weight from 6 kg
- Integral tube clips, robot mounting face and centring sleeve for gripper station



Stingray gripper

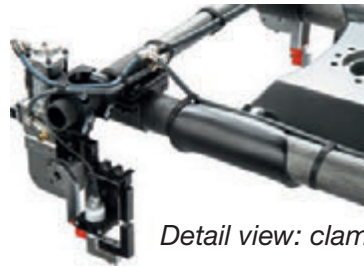

Detail view: clamp connection

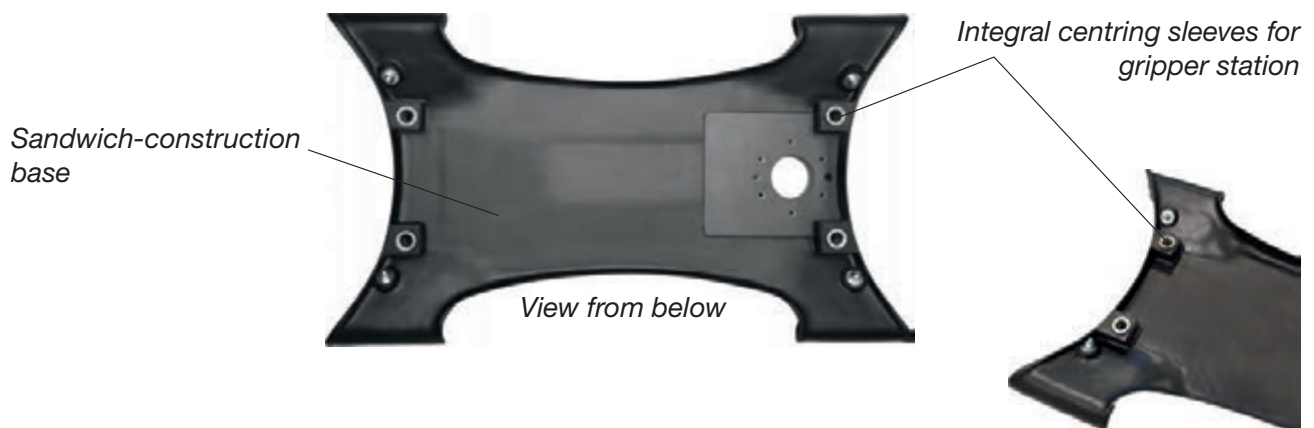


GRIPPING

TÜNKERS One Screw System (TOS)



The TÜNKERS® One Screw System combines the advantages of form-closed situation in the main frame (Level 1) with that of force-closed in the gripper arms (Level 2). Due to the ability to attach the joints in the main frame with one screw on the octagonal main frame profile, in certain applications this results in an extremely rapid assembly time. In order to guarantee a predefined clamping situation, each threaded connection should incorporate a clearance sleeve. The joints are optimally positioned by means of alternating hole templates at a distance of 30 mm from each surface and 15 mm offset from the adjacent surface.

- Octagonal-section aluminum profile in Level 1 and round tube in Level 2
- One of the fastest systems in automation in terms of MTTR
- Variable threaded connection concept
- Slim design in Level 1
- Small number of components
- No special tools required for assembly, no blind rivet nuts

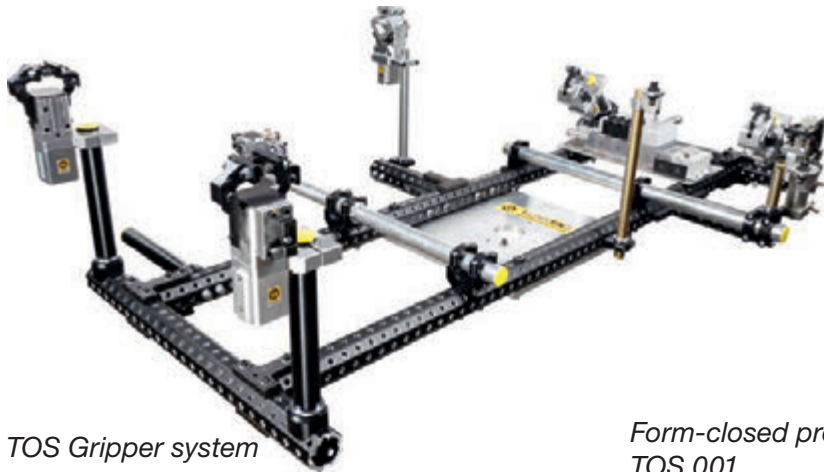

TOS Gripper system

Form-closed profile
TOS 001
for main frame

Force-closed
aluminum tubes GR 25/40
for gripper arms

Optional: CFK tubes
GRC 25/40




Detail view – Base frame
connector
TOS 023 / TOS 024



Detail view – Cross joint
TOS 040




Detail view – clamp connection

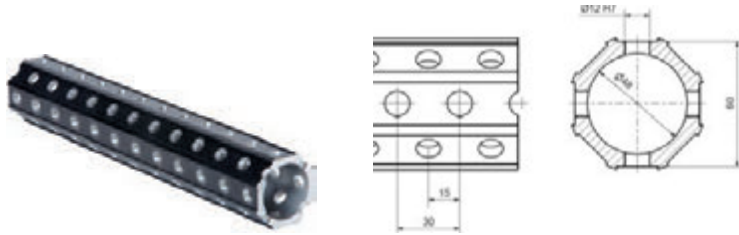

Type	Material	Weight	Geometrical moment of inertia Ix	Section modulus Wx
TOS 001 - Octagonal profile	EN AW 6063 T66	2,8 kg/m	359886 mm ⁴	11990 mm ³

Ordering information: TOS001-...

Profile lengths in set 30 mm increments (maximum length 4078 mm)

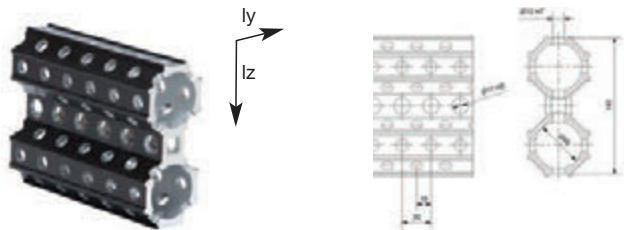

Type	Material	Weight	Geometrical moment of inertia	Section modulus
TOS 002 - Octagonal profile	EN AW 6063 T66	6,0 kg/m	Iz: 3858499 mm ⁴	Wz: 55121 mm ³
			Iy: 771806 mm ⁴	Wy: 25727 mm ³

Ordering information: TOS002-...

Profile lengths in set 30 mm increments (maximum length 4078 mm)



Type	Material	Weight	Geometrical moment of inertia Ix	Section modulus Wx
GR 40 - Circular-section tube	EN AW 2007	1,83 kg/m	95492 mm ⁴	4775 mm ³

Ordering information: GR40-...

Profile lengths in 10 mm increments (maximum length 6000 mm)



Type	Material	Weight	Geometrical moment of inertia Ix	Section modulus Wx
GR 25 - Round bar	EN AW 2007	1,4 kg/m	19175 mm ⁴	1534 mm ³




Ordering information: GR25-...

Profile lengths in 10 mm increments (maximum length 3000 mm)


Please Note:

All technical data relating to the profiles have been determined using Autodesk Inventor Professional 2014. Tünkers does not guarantee that the actual product exactly corresponds to the technical data provided. Tünkers accepts no liability for damage which may occur as the result of individual use of the product.

System configuration – base frame and cross joints

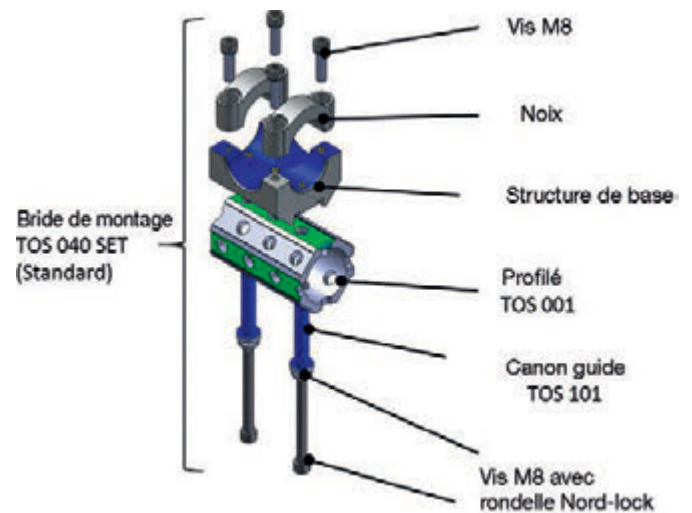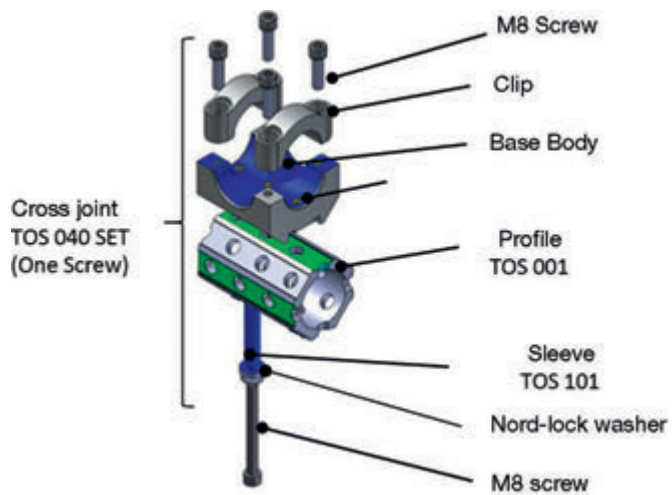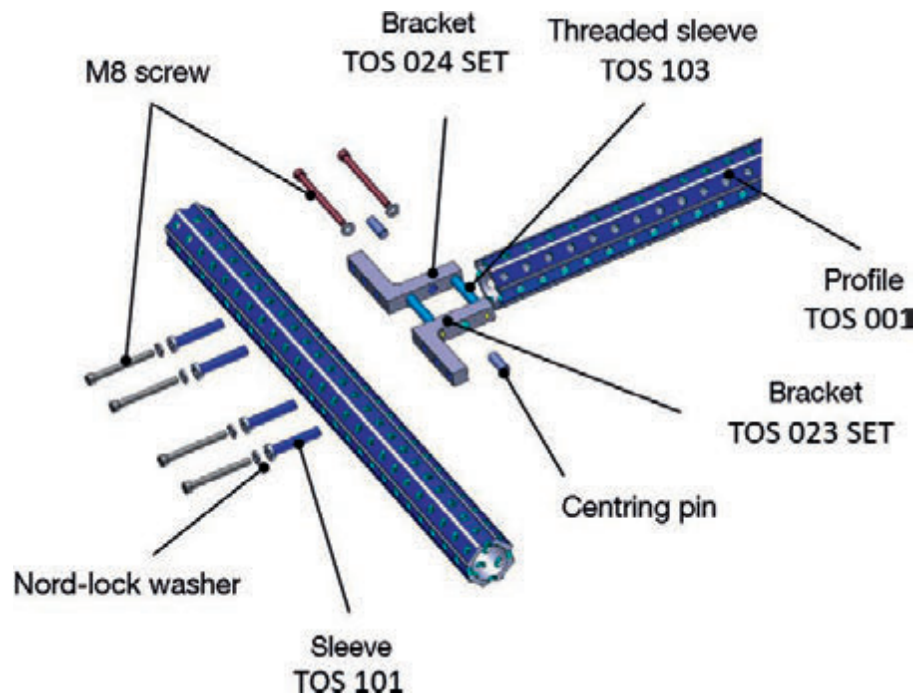

Components of the base frame (Level 1):

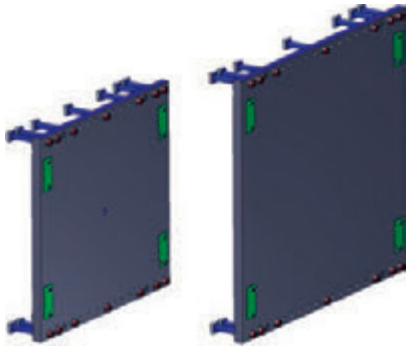

Base plate
TOS 010

Base plate
TOS 011



Flange
connection SW60
TOS 015 SET



Basic profile
TOS 001



TOS 023 SET
TOS 024 SET



T-connector
TOS 021 SET



Cross joint 40
TOS 040 SET



Joint 40 LW
TOS 041 SET



Cross joint 25
TOS 044 SET



Joint 25 LW
TOS 045 SET



Extension arm 40
TOS 043 SET

GRIPPING

Joints for gripper arms (Level 2):



GSKN Cross joint



GSKN Series

Typical adapter / clamping unit connections



GNAK A10



GNAK A00



GNXK



GNAK 40-A-1


GRIPPING

Euro-Gripper-Tooling System (EGT)




The Euro-Gripper-Tooling System (EGT) was developed by the Euro-Gripper Working Group. The concept is based on an octagonal profile which, with connectors, adapters and tubes, facilitates the modular attachment of clamping or centring units for fixture building grippers. Apart from a few shared standard components, the specific versions vary from OEM to OEM. Consequently, there is a basic catalogue which varies according to the OEM.

- TÜNKERS is a licensed supplier of EGT components to German car manufacturers and the manufacturer of complete EGT gripper systems
- They are based on SW 80/50 octagonal aluminum profiles with hole patterns
- Connections are attached by means of blind rivet nuts and screws to the profiles
- Reproducibility in the event of a crash provided by holes

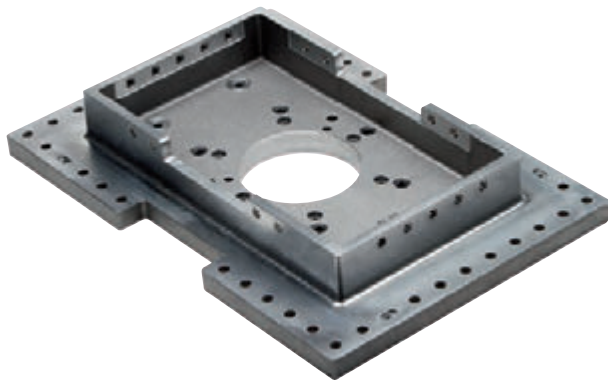


Base plate

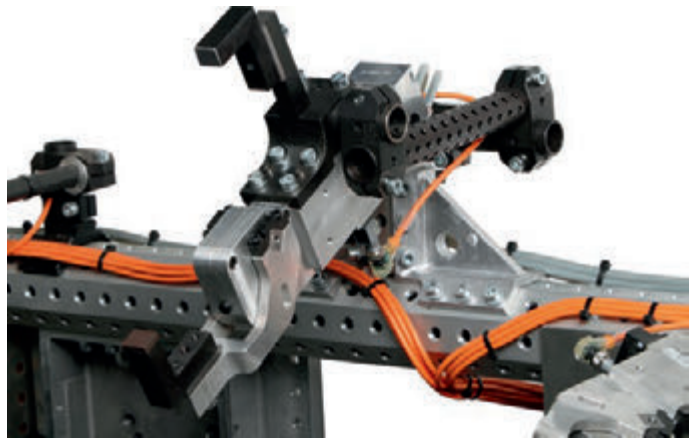


Clamp connection



Profile of the Euro-Gripper system

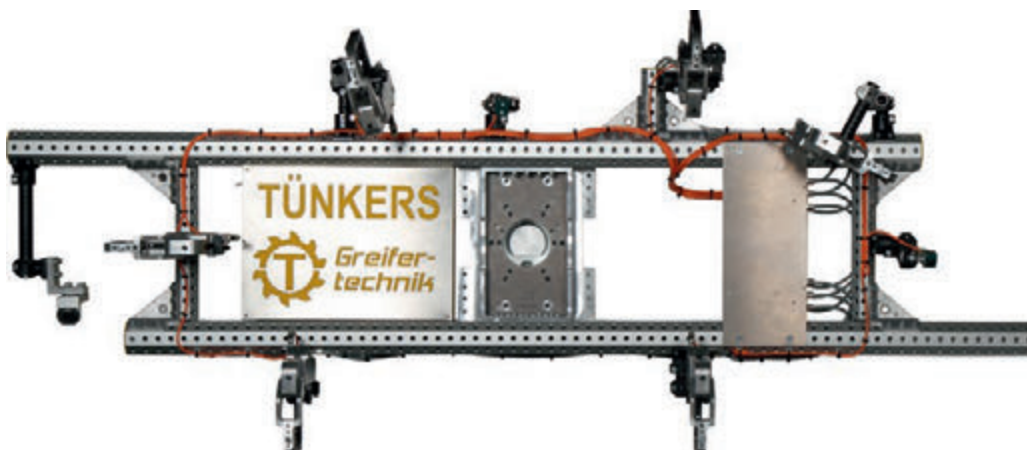


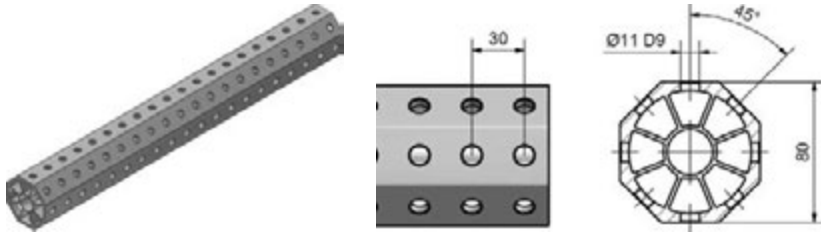

Type	Material	Weight	Geometrical moment of inertia I _x	Section modulus W _x
EGT 001 - Octagonal profile	EN AW 6063 T66	4,89 kg/m	874065 mm ⁴	21851 mm ³

Ordering information: EGT 001 SW80X...


Profile lengths in preset 30 mm increments (maximum length 4078 mm)

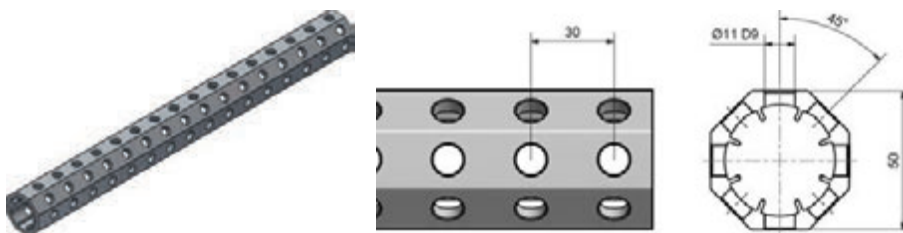

Type	Material	Weight	Geometrical moment of inertia I _x	Section modulus W _x
EGT 002 - Octagonal profile	EN AW 6063 T66	2,05 kg/m	96624 mm ⁴	3864 mm ³

Ordering information: EGT 002 SW50X...

Profile lengths in preset 30 mm increments (maximum length 4078 mm)

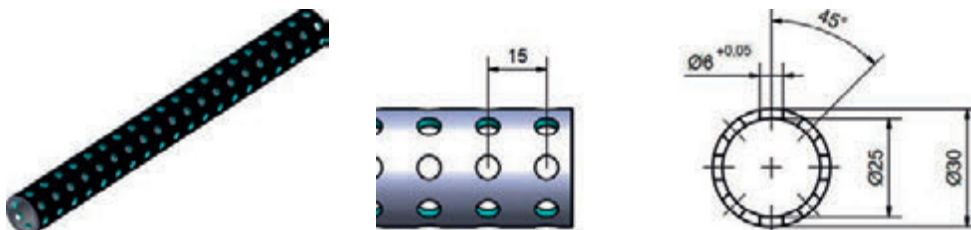

Type	Material	Weight	Geometrical moment of inertia I _x	Section modulus W _x
EGT 006 - Precision steel tube	E355-N	1,45 kg/m	9119 mm ⁴	2745 mm ³

Ordering information: EGT 006 Version M D30X2,5X...

Profile lengths in preset 15 mm increments

Version M: 73 mm to 448 mm

Version S: 86 mm to 446 mm

(maximum length 1000 mm)

Please Note:

All technical data relating to the profiles have been determined using Autodesk Inventor Professional 2014. Tünkers does not guarantee that the actual product exactly corresponds to the technical data provided. Tünkers accepts no liability for damage which may occur as the result of individual use of the product.

Components as practical extensions to the EGT System

- TGT joints for attaching the TÜNKERS® Round Tube System (TRR) to the EGT SW80 octagonal profile
- Use of the entire TÜNKERS® Round Tube System (TRR) for the gripper arms
- Weight reduction by using the TÜNKERS® Carbon Fibre Tube System (TCR)

TGT 700 SET





TGT 710 SET



TGT SW80/RR40
(special component)



TGT SW80/RR60
(special component)

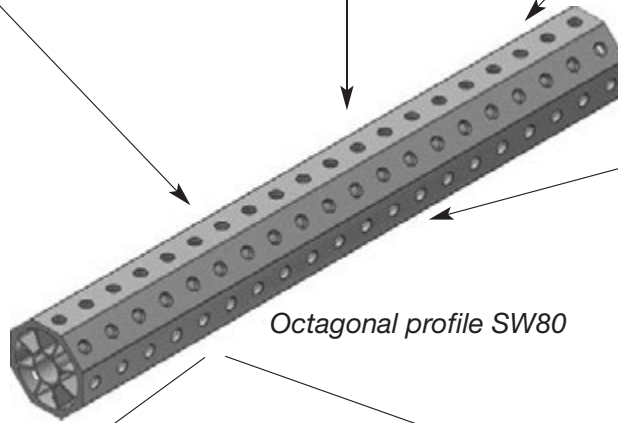


Octagonal profile SW80



Aluminum tubes for
standard applications



Optional: CFK tubes for
weight reduction

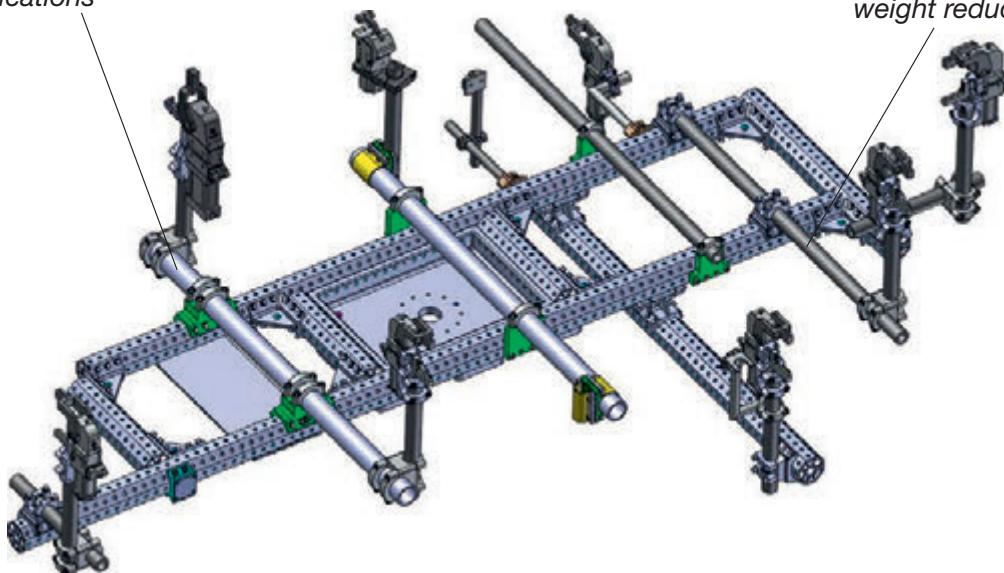

Components as practical extensions to the EGT System



- High-precision GEO blades (TGT 650) for the Euro-Gripper-Tooling System
- Application for GEO Grippers for direct attachment of clamping units to the base frame
- Variable lengths in the x- and y-directions
- Manufactured out of high-strength aluminum
- Maximum repetitive accuracy when replacing the GEO blade with a centring pin
- Optional: clip can be mounted on the reverse side in the case of high loadings



TGT 650 – GEO blade (300 mm x 155 mm)



Detail view – Attachment using a centring pin

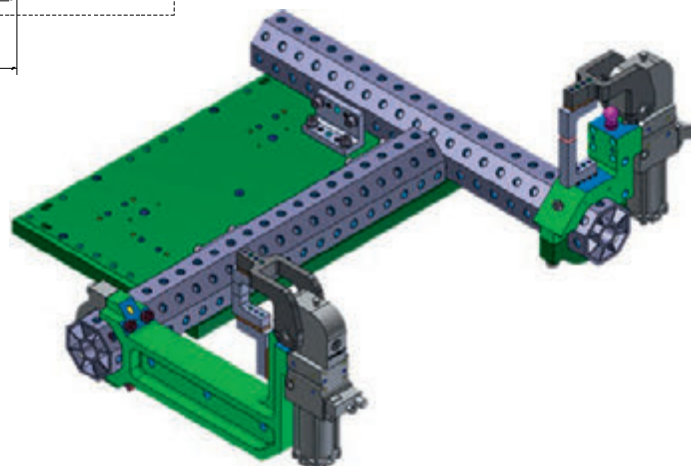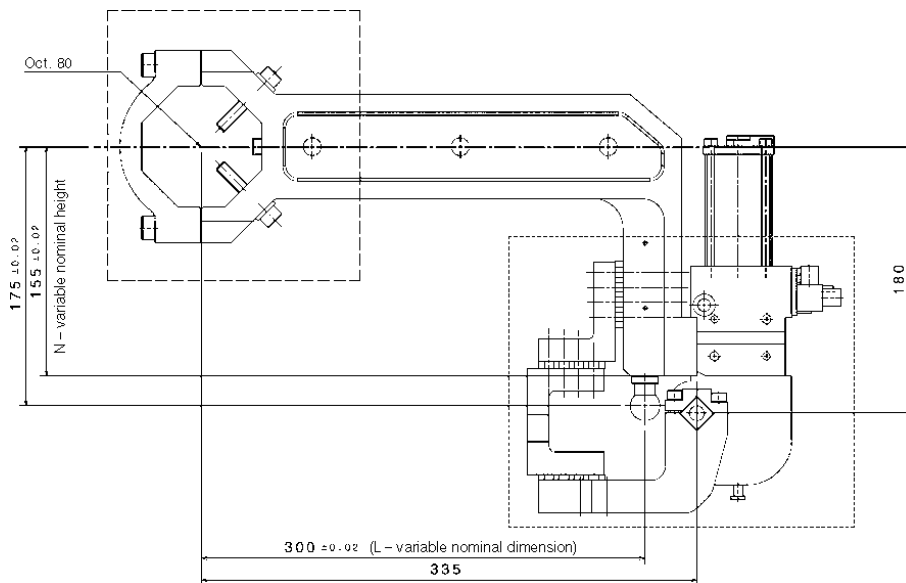

Typical configuration – GEO blade integration



- Lightweight pneumatic clamps for use with gripper systems
 - Reduction of the weight of the gripper
 - Lower category of robot
 - Reduction of vibrations on the gripper
 - Improve cycle times

Typical grippers



GN 40 · 2,38 kg



APG 40.1 BR2 A10 · 1,6 kg



GN 40 AS · 2,36 kg



APG 40.1 BR2 AS · 2 kg

Typical pneumatic clamps



V 40 LW · 1,7 kg



APH 40.5 H · 2,4 kg

Typical retractable pin units




SZK 25 · 0,4 kg




SZKT 40 · 1,7 kg




SZK 30.8 · 1,3 kg

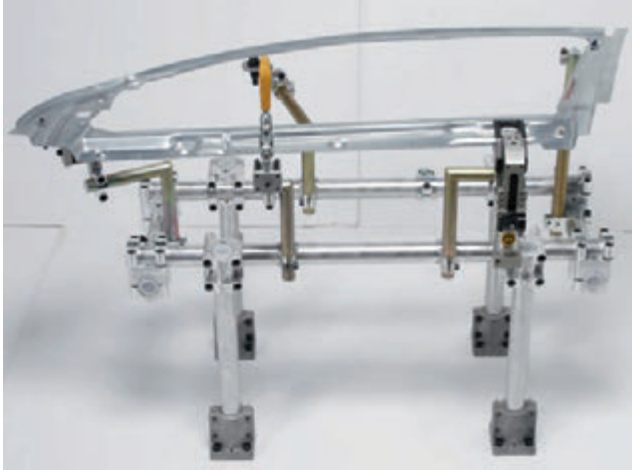

Fixture structure made from the Round Tube System (TRR)

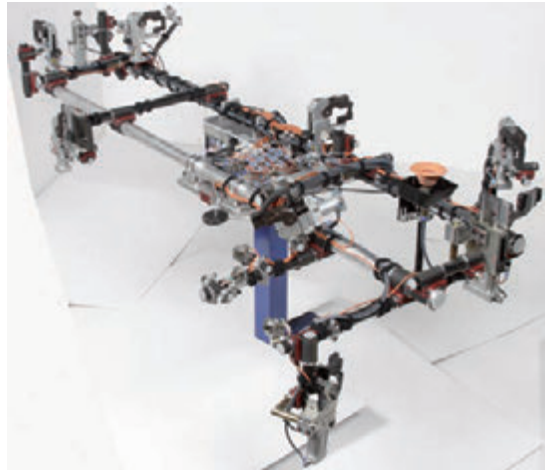

Hybrid Gripper (carbon fibre/aluminum)

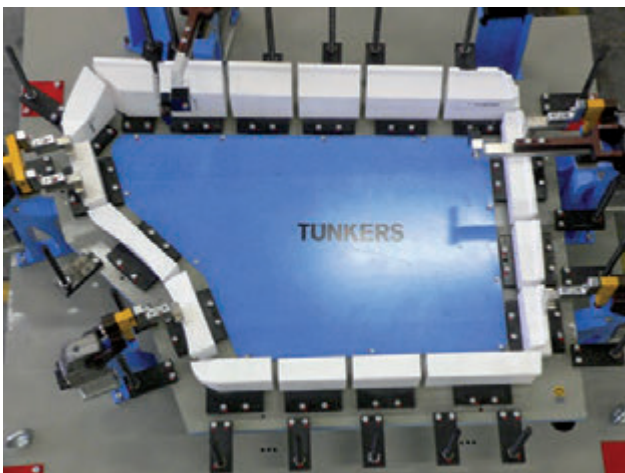

Clamping fixture to client's specification




Manipulator gripper made from the Round Tube System (TRR)

Design training for our modular gripper systems




Development of gripper concepts

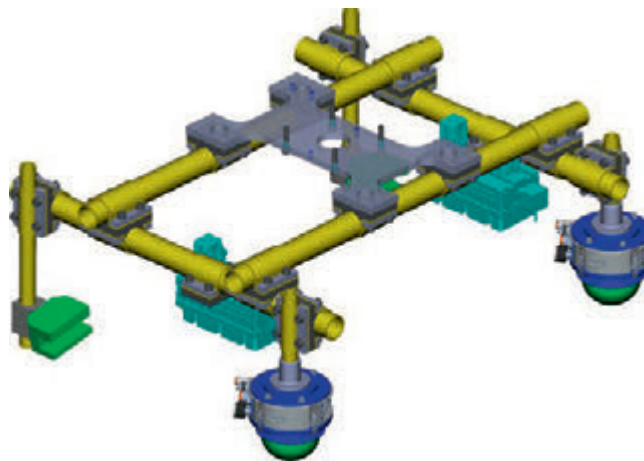

Measurement of vibrations on gripper systems while in operation



TREC accelerometer

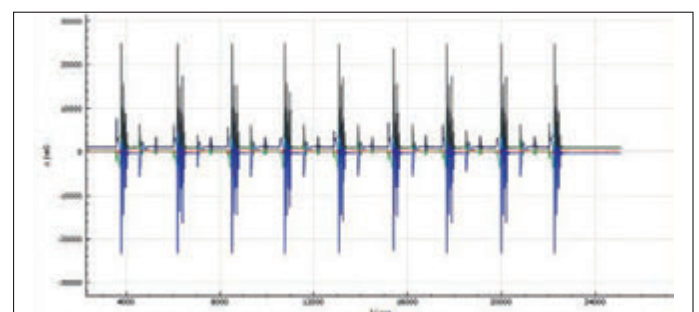

Acceleration diagram

FORMING

Umformen



Forming



TÜNKERS®
Ingenuity in series.




Forming

Punching




4-7

Stamping



4-13

Joining



4-21

Specialities



4-29

Power Press Technology



4-33

Fixtures



4-69




Forming – Our Speciality


The term “forming technology” causes the obligatory association with large-scale presses, such as they are used for the production of sheet metal components or complete car body parts.

Contrary to this, we are primarily supplying systems for post-processing of components made of steel and aluminum sheet metal or plastics. Typical applications include punching, stamping or joining operations required as additional processing steps for the manufacture of the finished part. The forming forces generated by these processes are in the range of approx. 1 to 100 kN.


The main applications of TÜNKERS forming systems are:




Punching




Marking

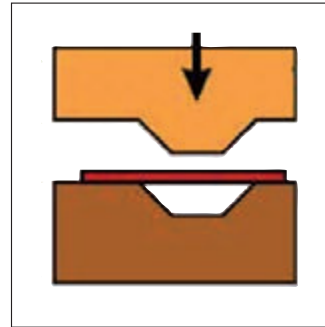


Nap Press Forming




Clinching

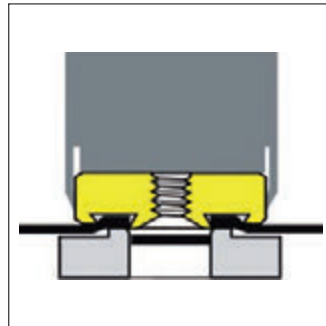


Setting of Nuts



Flanging



Cutting




Folding


We have been specialising within this range of applications for over 20 years with a focus on body sheets. Especially with a view to customised solutions, we can offer you a wealth of experience.

This catalogue contains a selection of established standard components supplied by us. Even if you cannot find a suitable solution for your application straight away, please do not hesitate to contact us.

It does not matter if the application concerns a manual toggle unit, stationary toggle unit or robotic solution – we will find a suitable solution for you for any forming process manual, stationary or robotic unit.

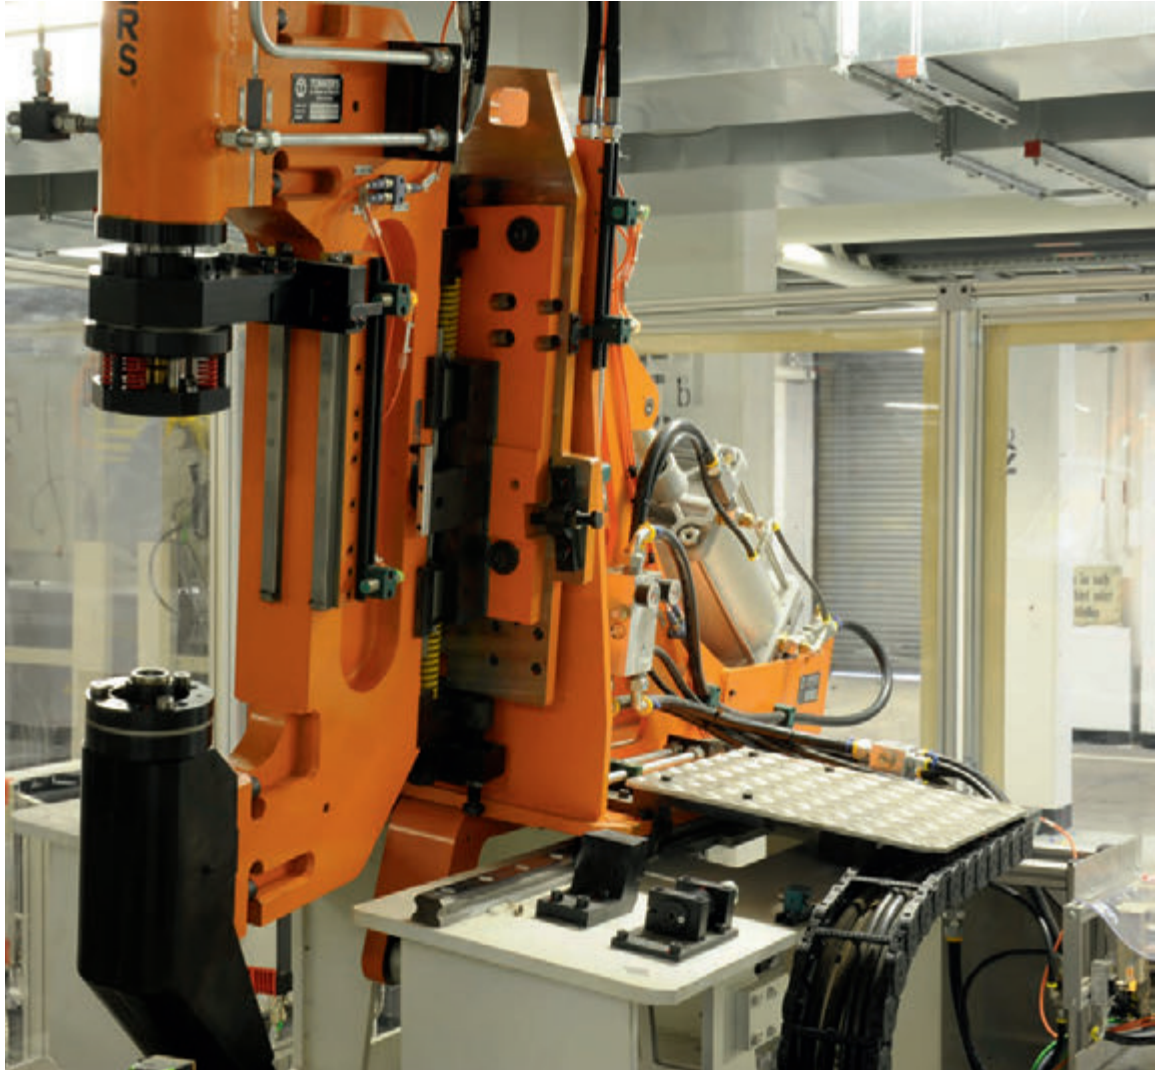

*Stationary
C-Frame unit*

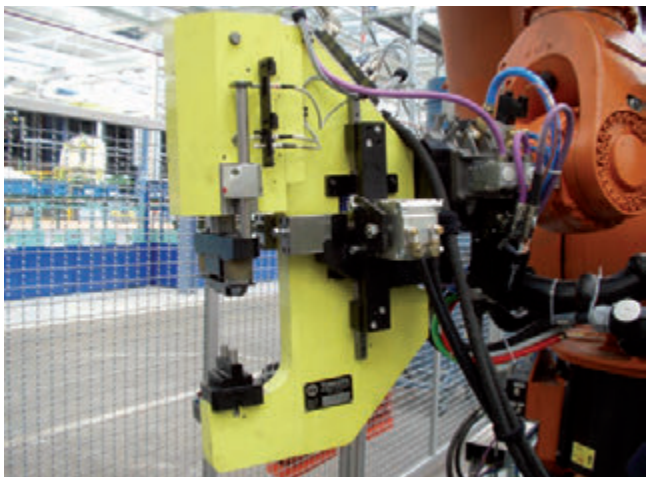


Robotic C-Frame unit



Manual unit

FORMING

Punching






Punching


With more than 1,000 applications for serial production, Tünkers offers a broad range of experience with punching and piercing applications for steel and aluminum sheet metal components.

Punching operations – even under complex conditions – are tasks which we realise on the basis of our compact power press units with pneumatic, hydraulic or pneumo-hydraulic drives especially developed for these applications.

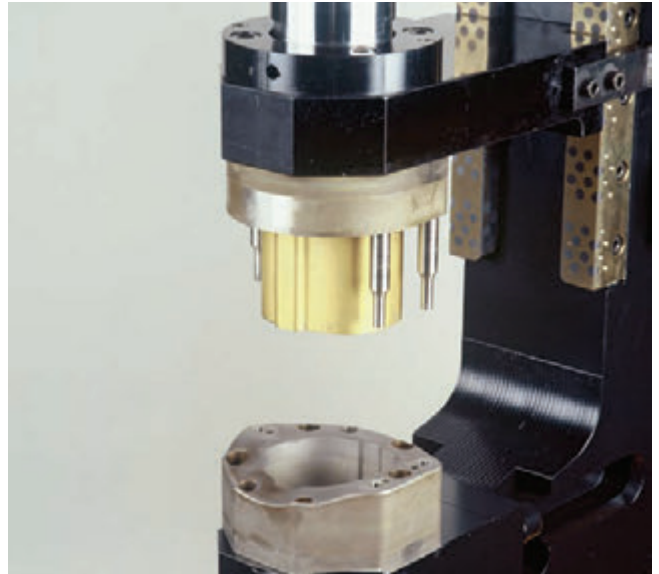


Tool Set

High-strength punch and die tools guarantee punching quantities of up to 200,000 cycles in connection with the TÜNKERS systems. Alternative designs in HWS, HSS or titanium nitride coated for round, rectangular or contoured punches and dies.

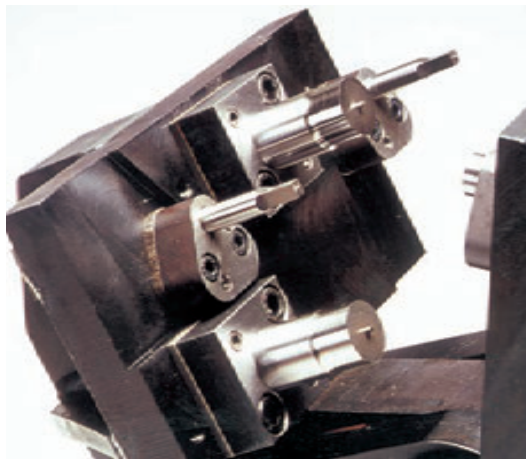


Retainer Technology


The holding system is crucial for the hole quality. The retainer holds the workpiece safely in position with a preload force of approx. 15 % of the punching force when the stamp moves down and provides for the repeatability of the punching process.

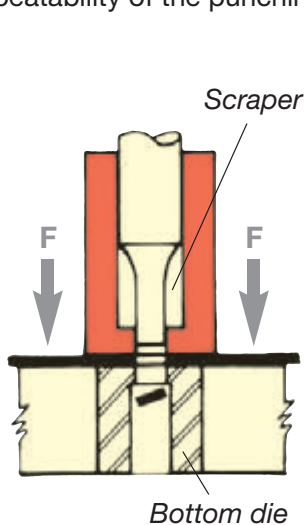

Polyurethane retainer of high-strength wear-free plastics

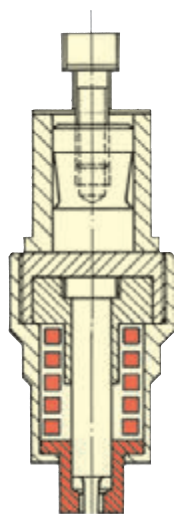

Tool cartridge with integrated stamp holder and spring-loaded retainer

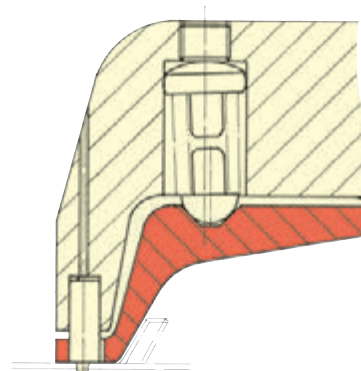

Special retainer in forked or pin-form design, adjusted to the interference situation

Simplified calculation of the punching force

The first step in designing any type of clamp is to determine the punching force required for the process. The following formulae and tables will provide you with a quick overview. Please note that the calculations are based on maximum tensile strength. Particularly in the case of high-strength steel panels with tensile strengths of up to 1,200 Nmm², due account must be taken of corresponding factors.

Force F = cutting edge circumference x sheet metal thickness x tensile strength

Example 1 (circular hole):

- Steel sheet 1.0338 tensile strength 350 N/mm²
- Circular hole 10 mm dia.
- Sheet thickness 1 mm

$$10 \text{ mm} \cdot 3,14 \cdot 1 \text{ mm} \cdot 350 \text{ N/mm}^2 \cdot 1,15 = 12.640 \text{ N} = 12,64 \text{ KN}$$

(circumference (D · π)) (thickness s) (tensile strength) (stripping force)

Example 2 (square hole):

- Steel sheet 1.0338 tensile strength 350 N/mm²
- Side length 10 mm
- Sheet thickness 1 mm

$$10 \text{ mm} \cdot 4 \cdot 1 \text{ mm} \cdot 350 \text{ N/mm}^2 \cdot 1,15 = 16.100 \text{ N} = 16,10 \text{ KN}$$

(circumference (a · 4)) (thickness s) (tensile strength) (stripping force)

Tensile strengths of standard materials


Typical material, sheet metal	max. tensile strength Rm (N/mm ²)
Steel 1.0338	350
Aluminum AlMg0,4Si1,2	260
Plastic Nylon	70
Copper Cu	200



Table showing examples of punching forces

Punching force [kN], for circular holes, material 1.0338

Sheet thickness s (mm)	Hole diameter d (mm)														
		3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	12,00	16,00	18,00	20,00	30,00	
	0,50	1,90	2,53	3,16	3,79	4,42	5,06	5,69	6,32	7,58	10,11	11,37	12,64	18,96	
	0,70	2,65	3,54	4,42	5,31	6,19	7,08	7,96	8,85	10,62	14,16	15,92	17,69	26,54	
	0,80	3,03	4,04	5,06	6,07	7,08	8,09	9,10	10,11	12,13	16,18	18,20	20,22	30,33	
	1,00	3,79	5,06	6,32	7,58	8,85	10,11	11,37	12,64	15,17	20,22	22,75	25,28	37,92	
	1,20	4,55	6,07	7,58	9,10	10,62	12,13	13,65	15,17	18,20	24,27	27,30	30,33	45,50	
	1,40	5,31	7,08	8,85	10,62	12,39	14,16	15,92	17,69	21,23	28,31	31,85	35,39	53,08	
	1,50	5,69	7,58	9,48	11,37	13,27	15,17	17,06	18,96	22,75	30,33	34,12	37,92	56,87	
	1,80	6,82	9,10	11,37	13,65	15,92	18,20	20,47	22,75	27,30	36,40	40,95	45,50	68,25	
	2,00	7,58	10,11	12,64	15,17	17,69	20,22	22,75	25,28	30,33	40,44	45,50	50,55	75,83	
	2,20	8,34	11,12	13,90	16,68	19,46	22,24	25,02	27,80	33,37	44,49	50,05	55,61	83,41	
	2,40	9,10	12,13	15,17	18,20	21,23	24,27	27,30	30,33	36,40	48,53	54,60	60,66	91,00	
	2,60	9,86	13,14	16,43	19,72	23,00	26,29	29,57	32,86	39,43	52,58	59,15	65,72	98,58	
	2,80	10,62	14,16	17,69	21,23	24,77	28,31	31,85	35,39	42,47	56,62	63,70	70,78	106,16	
	3,00	11,37	15,17	18,96	22,75	26,54	30,33	34,12	37,92	45,50	60,66	68,25	75,83	113,75	



Punching force [kN], for square holes, material 1.0338

Sheet thickness s (mm)	Side length a (mm)														
		3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	12,00	16,00	18,00	20,00	30,00	
	0,50	2,42	3,22	4,03	4,83	5,64	6,44	7,25	8,05	9,66	12,88	14,49	16,10	24,15	
	0,70	3,38	4,51	5,64	6,76	7,89	9,02	10,14	11,27	13,52	18,03	20,29	22,54	33,81	
	0,80	3,86	5,15	6,44	7,73	9,02	10,30	11,59	12,88	15,46	20,61	23,18	25,76	38,64	
	1,00	4,83	6,44	8,05	9,66	11,27	12,88	14,49	16,10	19,32	25,76	28,98	32,20	48,30	
	1,20	5,80	7,73	9,66	11,59	13,52	15,46	17,39	19,32	23,18	30,91	34,78	38,64	57,96	
	1,40	6,76	9,02	11,27	13,52	15,78	18,03	20,29	22,54	27,05	36,06	40,57	45,08	67,62	
	1,50	7,25	9,66	12,08	14,49	16,91	19,32	21,74	24,15	28,98	38,64	43,47	48,30	72,45	
	1,80	8,69	11,59	14,49	17,39	20,29	23,18	26,08	28,98	34,78	46,37	52,16	57,96	86,94	
	2,00	9,66	12,88	16,10	19,32	22,54	25,76	28,98	32,20	38,64	51,52	57,96	64,40	96,60	
	2,20	10,63	14,17	17,71	21,25	24,79	28,34	31,88	35,42	42,50	56,67	63,76	70,84	106,26	
	2,40	11,59	15,46	19,32	23,18	27,05	30,91	34,78	38,64	46,37	61,82	69,55	77,28	115,92	
	2,60	12,56	16,74	20,93	25,12	29,30	33,49	37,67	41,86	50,23	66,98	75,35	83,72	125,58	
	2,80	13,52	18,03	22,54	27,05	31,56	36,06	40,57	45,08		72,13	81,14	90,16	135,24	
3,00	14,49	19,32	24,15	28,98	33,81	38,64	43,47	48,30	57,96	77,28	86,94	96,60	144,90		




Pneumatic toggle-lever clamp for punching holes for 35 mm dia. pipe unions in sheet steel




C-frame prepared for removal of scrap by suction for the overhead punching of holes



PFS400-60 for punching 2 holes simultaneously

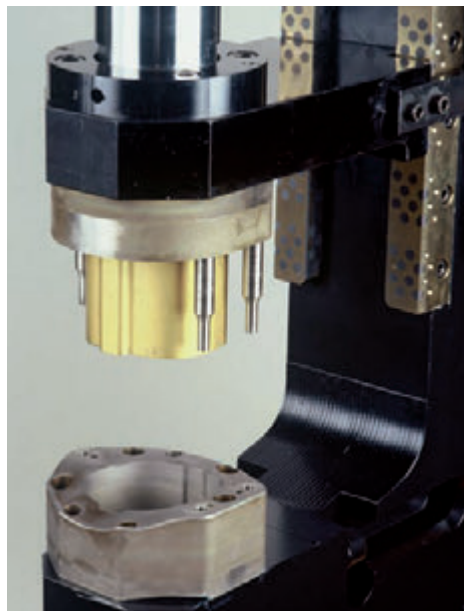

Bulkhead punch unit, right-hand drive breach

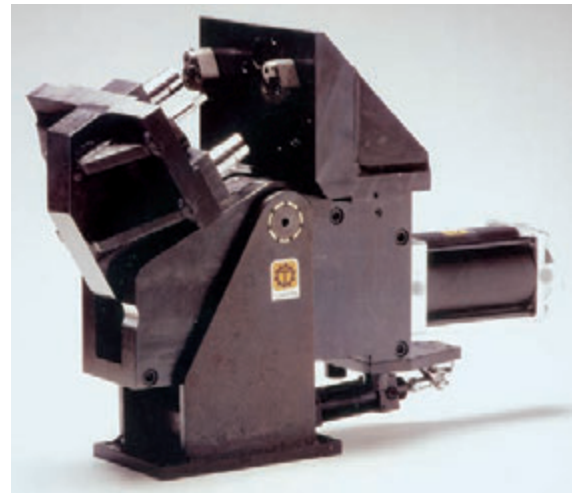


Hydraulic multiple punch tool with toggle-lever clamp



C-frame system with hydraulic cylinder for roof channel holes




C-frame system as dual punch with multi-force cylinder

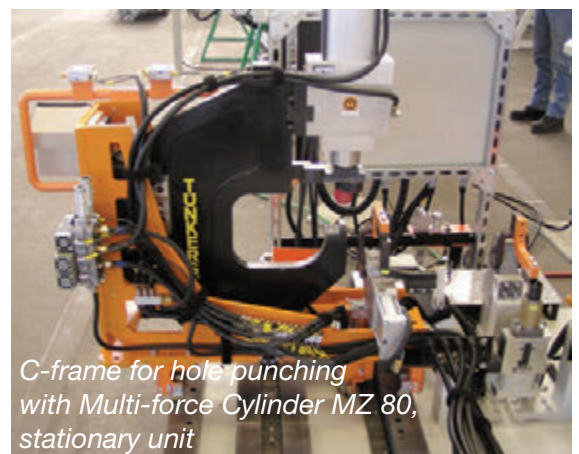

C-frame for hole punching with Multi-force Cylinder MZ 80, stationary unit

FORMING

Stamping





Marking components with Stamping

Similar to simple steel-stamp numbers, the component is marked with letters, numbers or symbols via a forming process utilising > 5 kN forces.

Good readability of the marking, also after painting, requires a penetration depth of the types into the workpiece of approx. 0.2mm.

Common stamping applications are shift and date stamps, name plates or company stamps.


Examples

Shift/date stamps


Marking of workpieces in serial production, for the allocation of the production to the responsible assembly or production group.

Example for a part number code –


6 digits. 6mm type height, press force ~ 40 kN

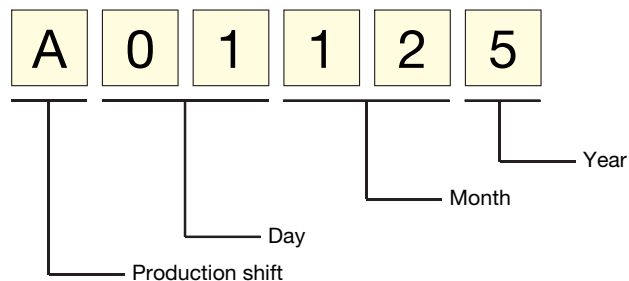


Operator stamp

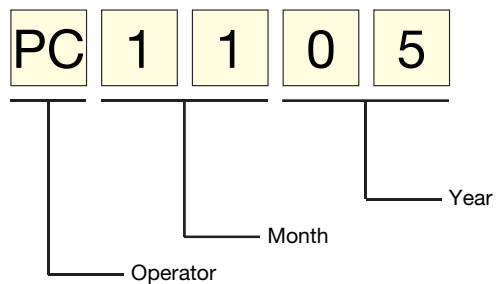

Plant / company stamp

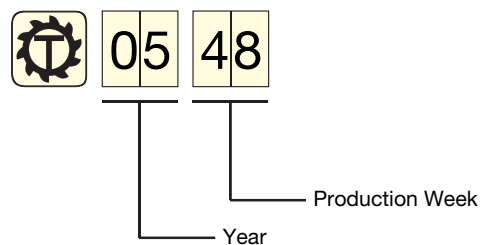

Production number

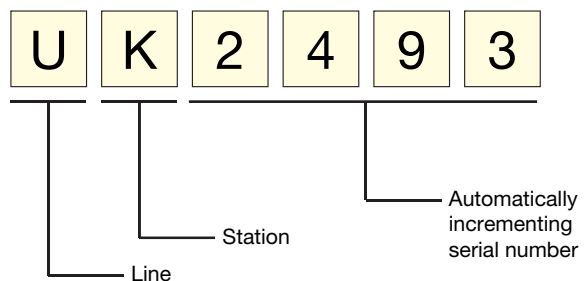


Stamping Tools

Robust type holders and stamping tools - alternatively key-operated or automated for digit heights of 2-8 mm.



Type holder

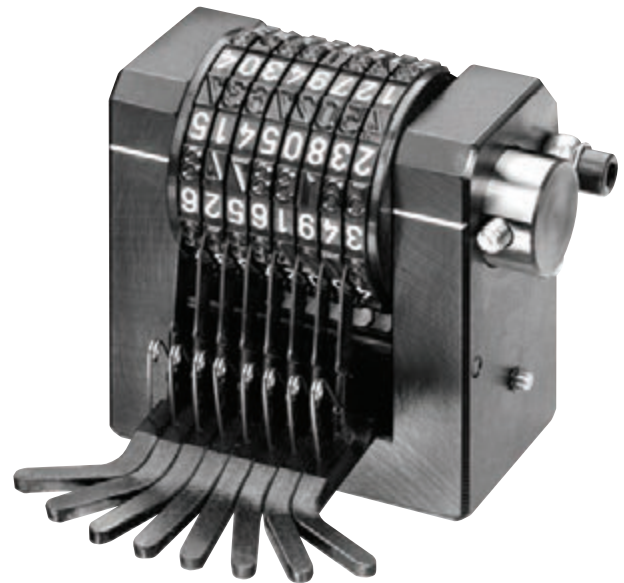

Stamping tool

Pressing Forces

Unlike other forming processes, stamping only requires a short power stroke (< 1 mm). That is why toggle-joint supported drives are particularly suited, as they generate maximum power just before the end position is reached. The pressing forces are proportional to type height and the number of digits. The following tables give an overview of common applications:

Sheet steel metal, 1.0338, tensile strength 350 N/mm²

Stamping depth: 0,2 mm





Type height (mm)	Number of digits									
	1	2	3	4	5	6	7	8	9	10
4	3,0	6,0	8,9	11,9	14,9	17,9	20,8	23,8	26,8	29,8
5	3,7	7,4	11,0	14,7	18,4	22,1	25,7	29,4	33,1	36,8
6	4,4	8,8	13,1	17,5	21,9	26,3	30,6	35,0	39,4	43,8
7	5,2	10,3	15,5	20,7	25,8	31,0	36,1	41,3	46,5	51,6
8	5,9	11,7	17,6	23,5	29,3	35,2	41,0	46,9	52,8	58,6
Pressing force in kN										



Type Holder PTH . . .



8 characters, 6 mm high



Ordering example:

PTH 8 6
 ↳ 6 mm font height¹
 ↳ Number of digits
 ↳ Type holder

¹ Customised stamps available


The typeface is **medium** pursuant to DIN 1451

We would be happy to offer further models upon request.



FORMING



Set Key Stamping Tool P . . . M

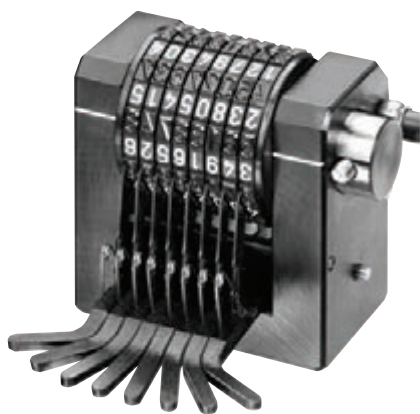

Manually operated type wheels with set keys

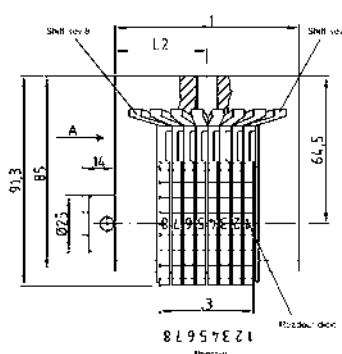

Ordering example:


P 6 8 M
 ↳ Manual-operation
 ↳ Number of digits
 ↳ 6 mm font height
 ↳ Stamping tool

Number of digits	Main dimensions (6mm type height)		
	L1	L2	L3
4	55	27,5	19,9
5	60	30	22,1
6	60	30	30,3
7	70	35	35,5
8	80	40	46,4


The typeface is **medium** pursuant to DIN 1451 (Optionally available with narrow typeface pursuant to DIN 1451)

	Type height	Number of digits
Standard	4; 5; 6	4; 5; 6; 7; 8

Subject to technical modifications.

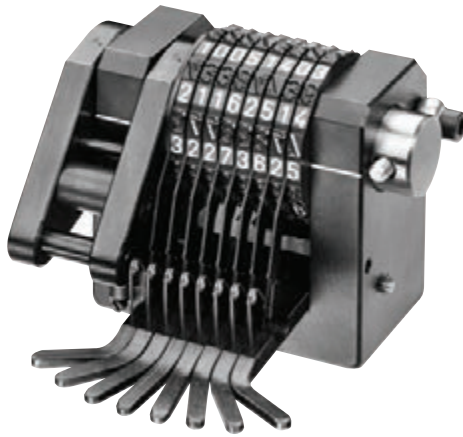

Set key stamping tool with automatically incrementing type wheels

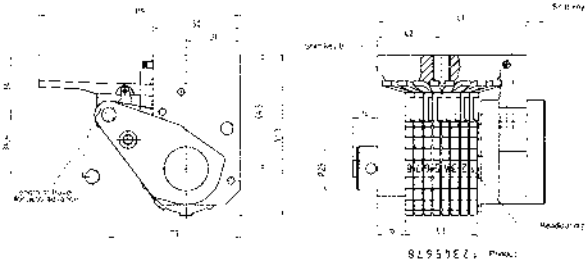

The typeface is **medium** pursuant to DIN 1451 (Optionally available with narrow typeface pursuant to DIN 1451)

We would be happy to offer further models upon request.

Ordering example:

P **6** **8** **A3**
 ↳ last three digits automatically incrementing
 ↳ Number of digits
 ↳ 6 mm font height
 ↳ Stamping tool

Number of digits	Main dimensions		
	L1	L2	L3
4	75	26,5	19,9
5	80	30	25
6	85	31	30,3
7	90	46	36
8	95	36,5	40,7

	Type height	Number of digits	No. of automatically incrementing digits
Standard	4; 5; 6	4; 5; 6; 7; 8	A3; A4


On demand:

- Mirror-image writing
- Location of the counter selectable
- Max. 2 separate counters per stamping
- Switch crank left or right
- Engraving 0-9, letters, logos, etc.



Stamping

Application examples

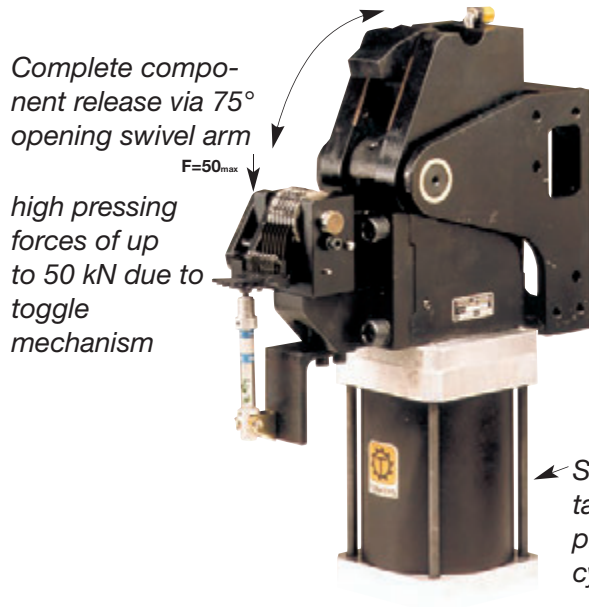

Complete component release via 75° opening swivel arm

$F=50_{max}$

high pressing forces of up to 50 kN due to toggle mechanism

Stamping unit as power press unit with pneumatic cylinder

Spring-loaded swivel bracket for unit equalisation

Single or tandem pneumatic cylinder


Multi-force cylinder with integrated guide, anti-rotating



Stamping unit as C-frame system with multi-force cylinder

Pressure pad

Automatic stamping tool

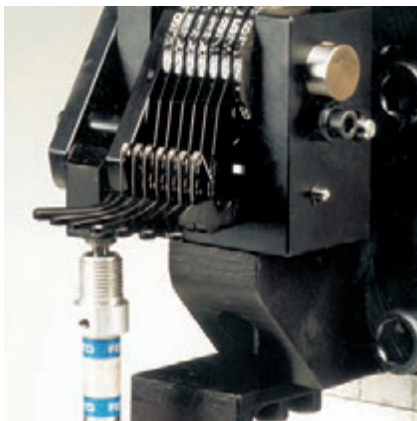


Automatic stamping unit


Stamping unit with 8 digits, switching keys and automatic changing via pneumatic cylinder

Product variants


Stamping tool mounted to swivel arm [PO]



Stamping tool mounted to jaw [PU]



Type holder alternatively mountable on both sides (PTH)




Stamping Unit CBMZ 45



Example of a C-frame system

Drive: Multi-force cylinder
Medium: Compressed air: 5 bar
Pressing force: 45 kN
Reach X: 50, 100, 150 mm
Stroke: 50, 100, 150 mm
Tool: Automatic stamping tool

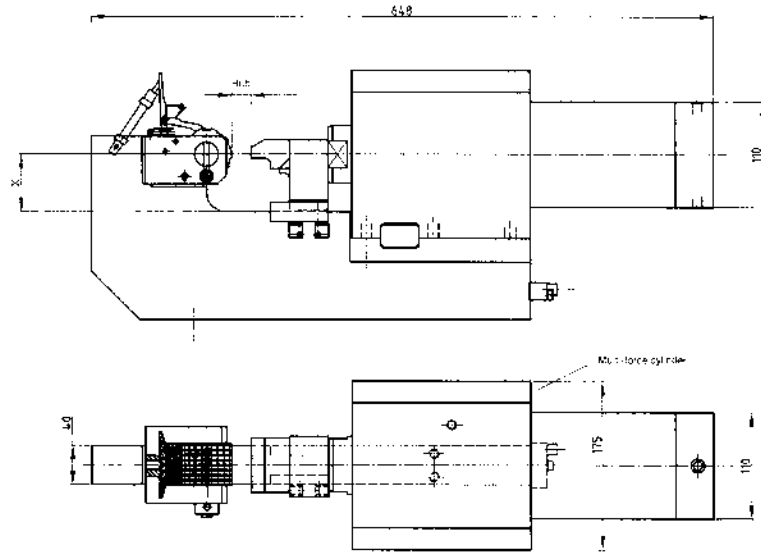

Ordering example:

CBMZ 45 100 50 PU 6/8 A3 T12

- T12 inductive sensing system (option: T08 pneumatic)
- last 3 digits automatically incrementing
- 6 mm type height / 8 number of digits
- Stamping tool at bottom, PO: stamping tool at top (PTH=type holder)
- Stroke
- Reach Xstroke
- Type


FORMING

Stamping Unit PFS 400-60 PU



Example of power press unit

Drive: Pneumatic cylinder
Medium: Compressed air 5 bar
Pressing force: 50 kN
Reach: 60 mm
Opening angle: 75°
Tool: Automatic stamping tool

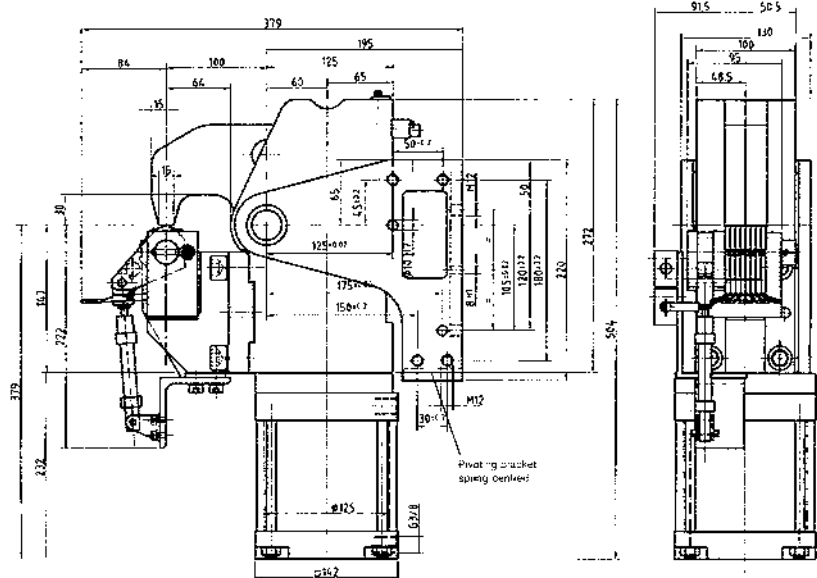


Ordering example:

PFS 400 60 PU 5/7 A2 T12

- T12 inductive sensing system (option: T08 pneumatic)
- last 2 digits automatically incrementing
- 5 mm type height / 7 number of digits
- Stamping tool at bottom, PO: stamping tool at top (PTH=type holder)
- Reach
- Type

Subject to technical modifications.

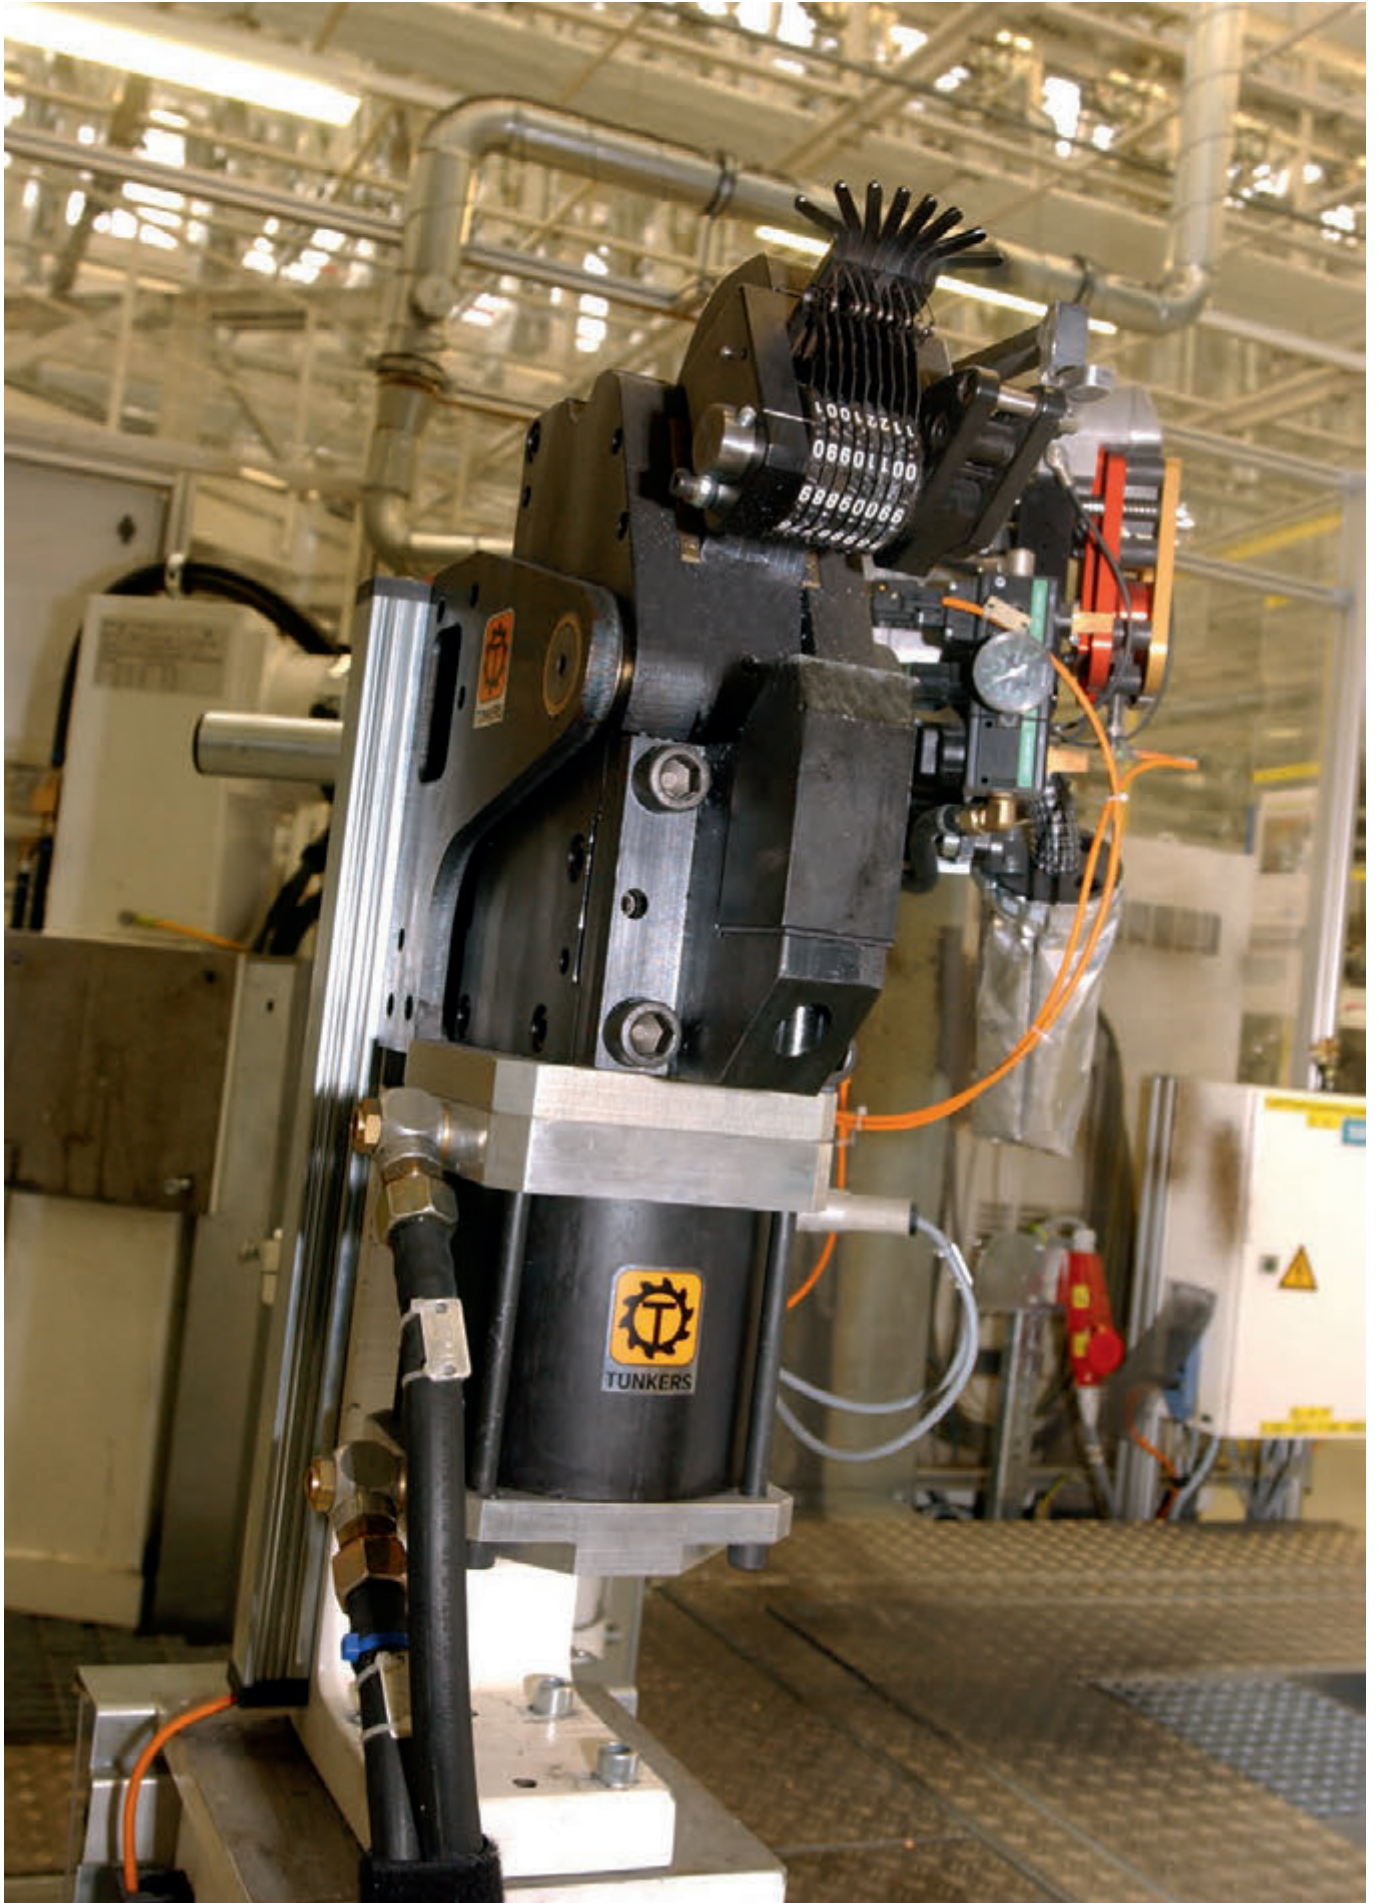

FORMING

Joining





Joining

As a joining procedure for sheet metal components, clinching is the alternative to resistance welding. At comparable strengths, non-weldable materials, such as pre-coated and painted sheet metals, combinations of steel and aluminum and pairings with intermediate layers can be simply and more securely joined together.

This is one reason why, in many types of industry, such as domestic appliances, car body construction and in the ventilation and air conditioning sectors for example, clinching has become established as a joining procedure. In addition, mechanical joining offers other substantial advantages:


- Joints only produced by forming the material
- No heating effects, which can result in tensions in the component
- Cost-effective joining without components vulnerable to welding (such as welding caps)
- Low energy costs for the joining process

Convincing arguments for the use of clinching.

Joining processes

mechanisches Prinzip **BTM**

Using a specially-shaped stamping tool and die, the sheet metal layers to be joined are formed by means of a deep-draw peening procedure in such a way that an undercut below the bottom layer is produced. The components are mechanically joined together.

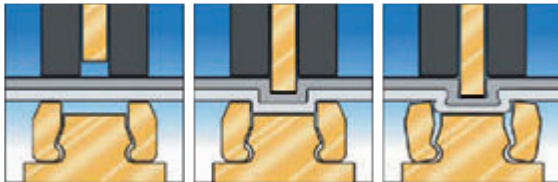

SPANNEN

TIEFZIEHEN

VERRIEGELN

Example of a clinched joint



Cross-section of a clinched joint
material: Aluminum 1.5 mm thick



Joint from below – die side



Joint from above – stamp side

Clinching is cost-effective

Lower investment and, above all, lower running costs mean that, in comparison with spot-welding, clinching is a cost-effective joining process.

Insertion tools



In the case of insertion tools for joining technology, we rely on the quality standards of our technology partner BTM, with its Tog-L-Loc products.



Tog-L-Loc® stamps feature a slight radius around the point of the stamp, enabling it to control any lateral movement of the material, without it becoming fractured.

FORMING

BTM Tog-L-Loc® dies

Tog-L-Loc® dies are available in three basic versions, in order to satisfy a variety of clinching requirements.



940 Series type (preferred)

With this type of die, the three movable discs are encircled by elastomer and a support ring.



Copyright
BTM Europe




Three-part dies with elastomer

Dies of this type feature three movable discs, which are retained by an elastomer. They are ideally suited for confined areas of construction. The die guard can be adapted to fit any specific component!



Two-part dies

This type of die is ideal for use in the most confined areas of construction; the flange or the interference edge runs parallel to the opening direction of the discs!

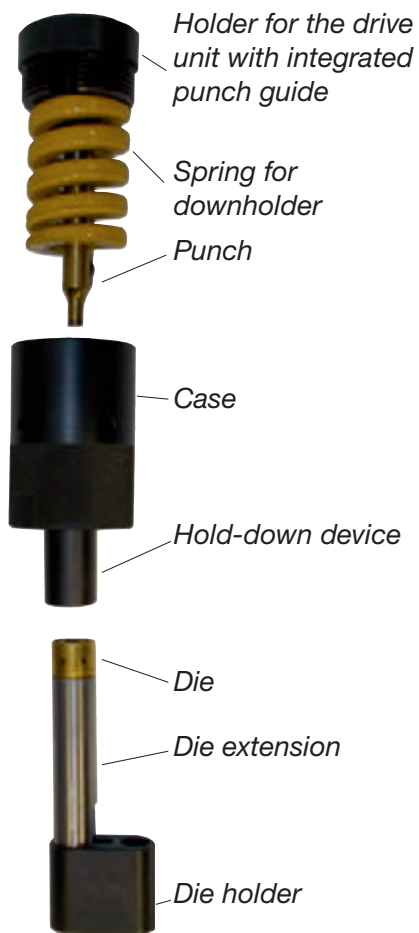

Tool construction and design

The Tog-L- Loc® clinching process includes two main components: a punch and a die. Tog-L- Loc® is a clinching process without cutting. The patented clinching tools generate a round, gas-tight and fixed clinching point.

Currently, there are six standard Tog-L- Loc® tool sizes: 3.0 mm, 3.8 mm, 4.6 mm, 5.5 mm, 6.4 mm and 7.6 mm punch diameter. The tool size of Tog-L- Loc® is determined by the punch diameter.


The selection of the right tool size for an application depends on various factors like type and thickness of the material to be clinched, the space available for the clinching point and the intended rigidity of the connection.

Unit design

Precise tool technology is a prerequisite for the repeatable production of clinching connections. A coaxiality between punch and die of less than 0.05 mm must be ensured, as offsetting would inevitably result in reduced shear and head strength. The tool systems described in the power press unit technology chapter are tailored to meet these requirements.

Guideline for estimating the joining process forces

Concrete series of tests on the relevant sheet pairs are imperative for a process force prognosis. The required forming forces increase with increasing sheet thickness.

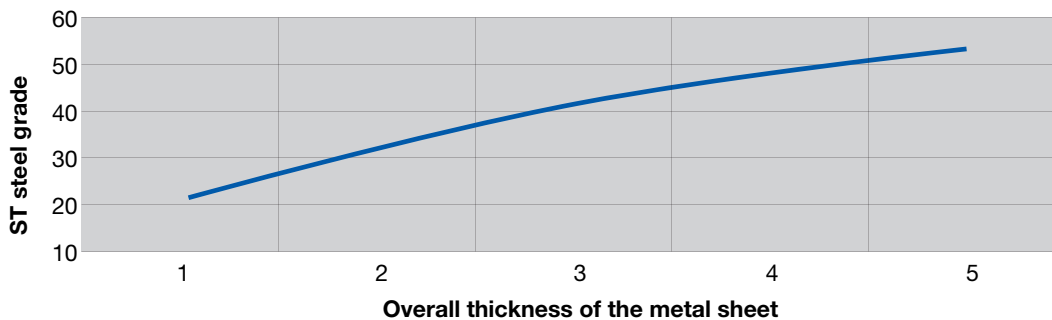

Quality criterion residual base thickness

A process supervision including force and force/path measuring systems developed together with our partner HIE SCHWEISS-SYSTEME GmbH ensures the joint connection quality and generates process reports (see chapter on power press unit technology).



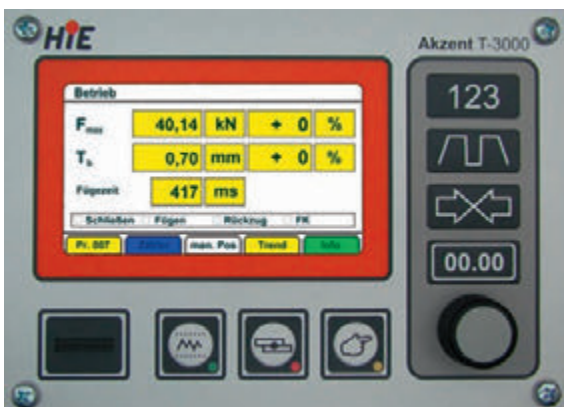


Image: Illustration process control, setpoint deviation and display the joining path

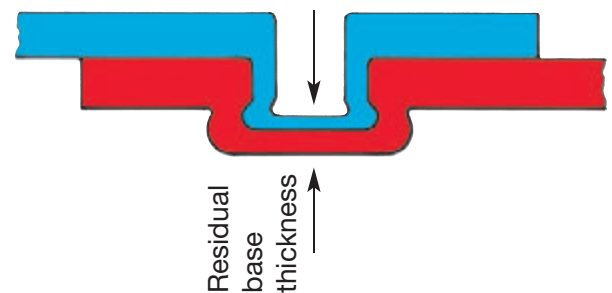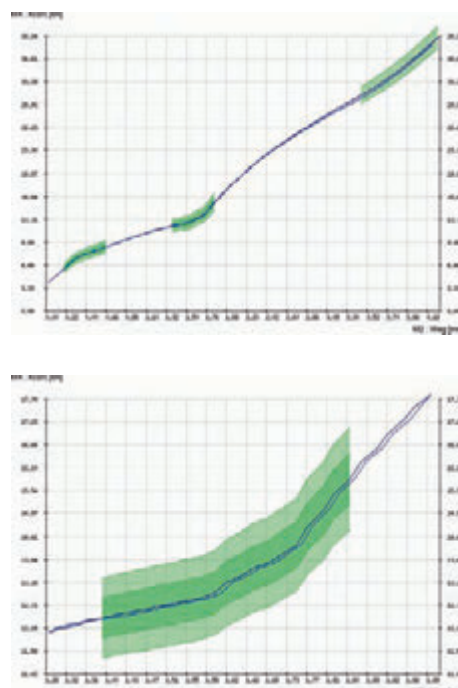


Tool lubrication

In order to optimize product life, avoid cutting or cracking in the component, it may be necessary to use lubrication.

Our process control makes it possible to activate a lubrication for any point on the punch or die. The spray nozzles are fixed as closely as possible to the joining point at the C-frame.

For lubrication, we use standard greasing systems.

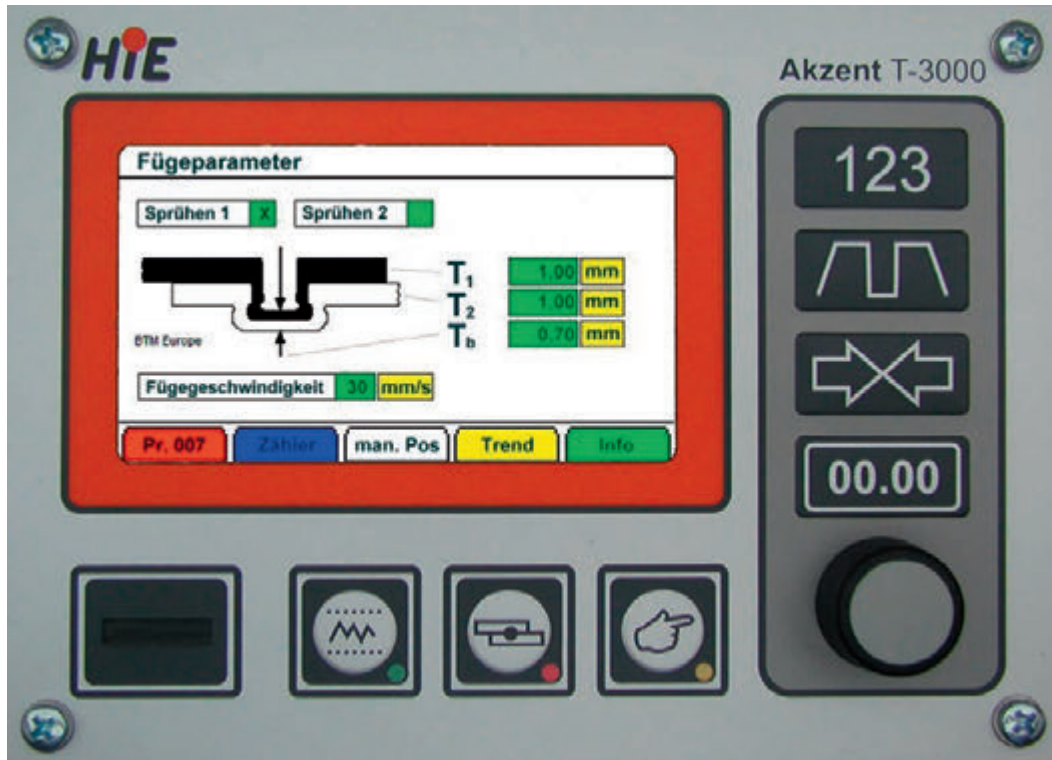

Imaging process control, activation spraying

Benefits:

- Stable process even for indexed components as any point may be lubricated.
- Minimum quantity of lubricant thanks to air-lubricant mix
- Even lubrication for increased product life


C-frame with electrical drive and process control

Our new electrically driven C-frame with process control was developed especially for robotic applications in joining. The control communicates with the robot which controls the C-frame as a 7-axis. The process control includes quality control, data back-up and lubrication control of the tools.

Performance data:


E-drive with planetary screw drives

$F_{\max} = 50 \text{ kN}$, reach 300 mm, stroke 200 mm

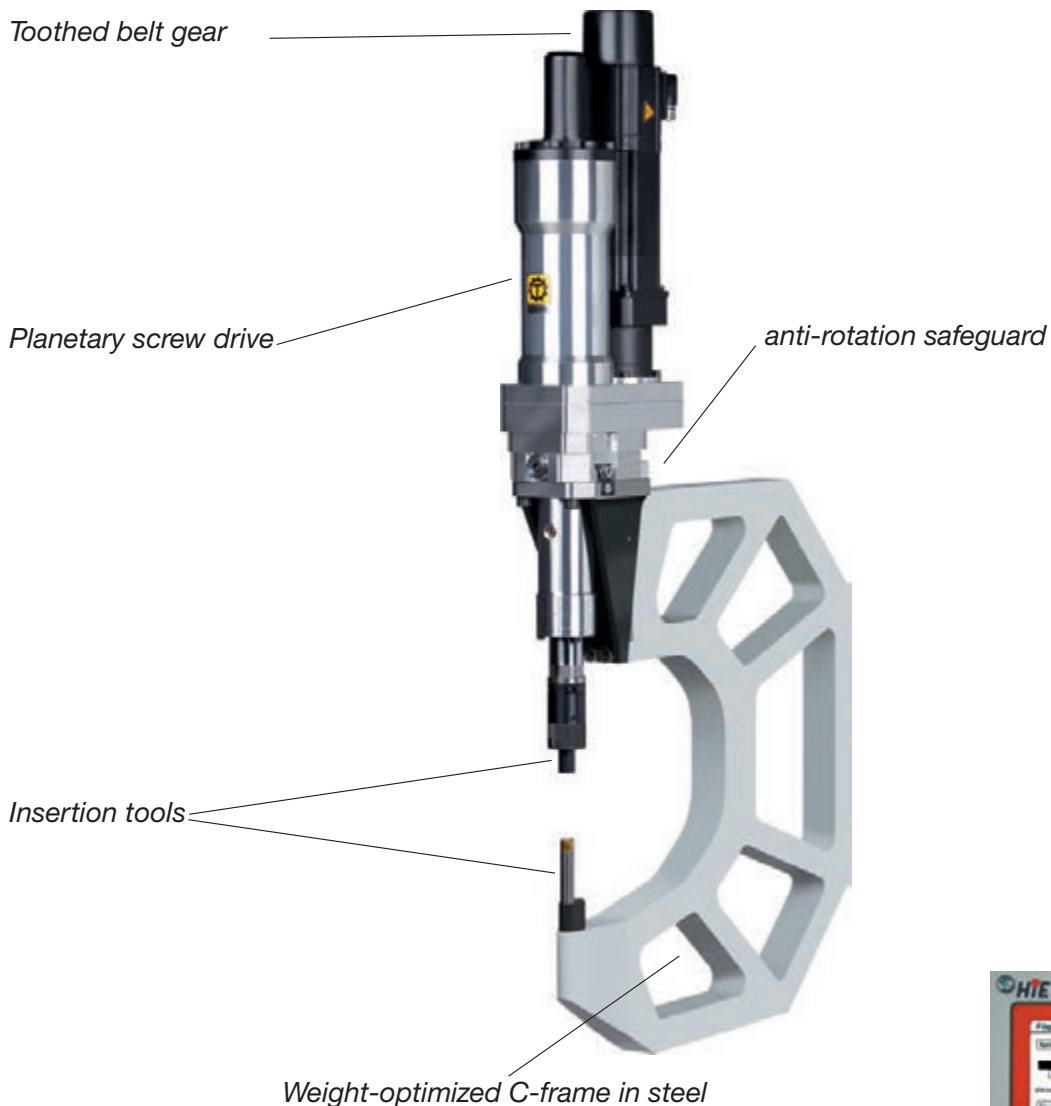


Process control and monitoring


Application examples

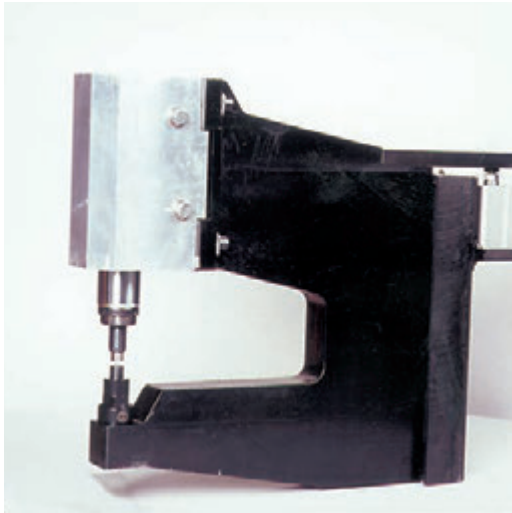

Hydraulic C-frame system for joining applications with hydraulic drive

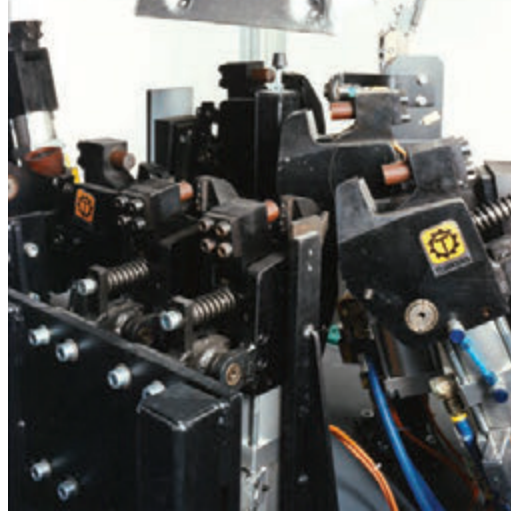

Compact unit with pneumatic drive

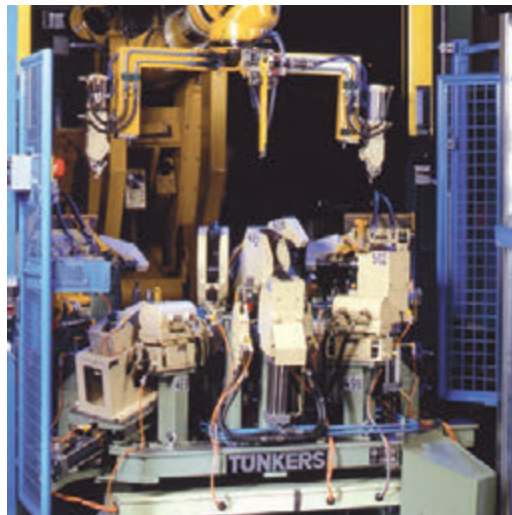

Turnkey joining station with C-frames and power press unit



Power press unit with hold-down device



Power press unit with pneumatic tandem cylinder




Power press unit with pneumatic drive

FORMING

Specialities


Special Processes for Forming



Special processes for forming



When sheet aluminum, sheet steel or plastic sheets have to be formed, we have the answer. With a whole series of special solutions for bending, cutting, folding and crimping, we can offer a wealth of experience with this process and tool technology. A selection is shown below:

Collar forming




C-frame system with HydroAir cylinder

Folding

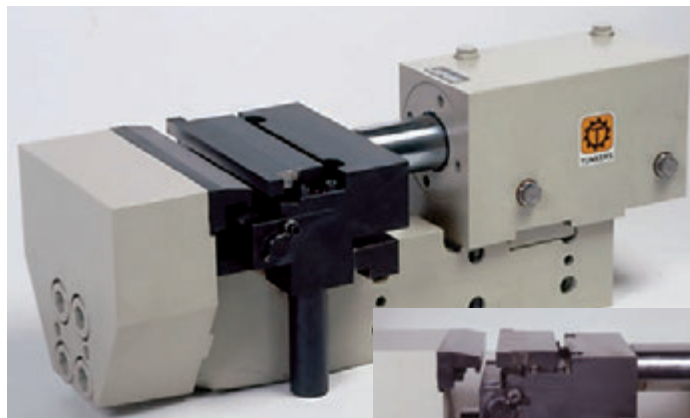



C-frame system for folding short sheet metal offcuts, with integral hold-down device

Cutting



Hydraulic power press unit for cutting car body sheet metals

Nap Press Forming

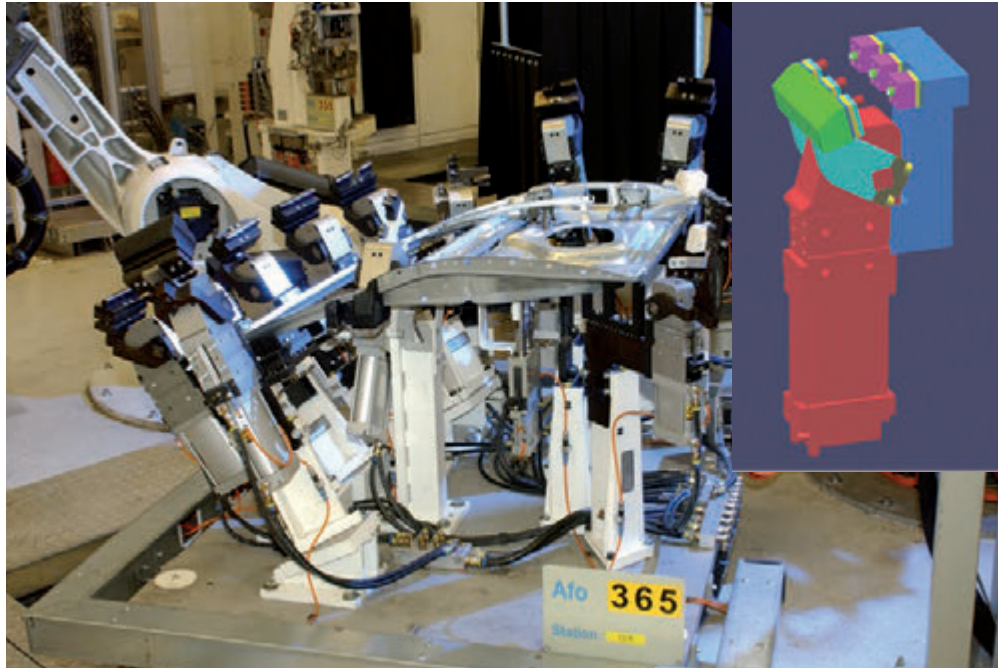

Fixture with power press units for stamping of naps/beads into steel sheets

Bending

Special power press unit for bending of a steel sheet by 180° in one step


Operational sequence

Initial position

Bending by 75°

Folding with clamp hook


Final position

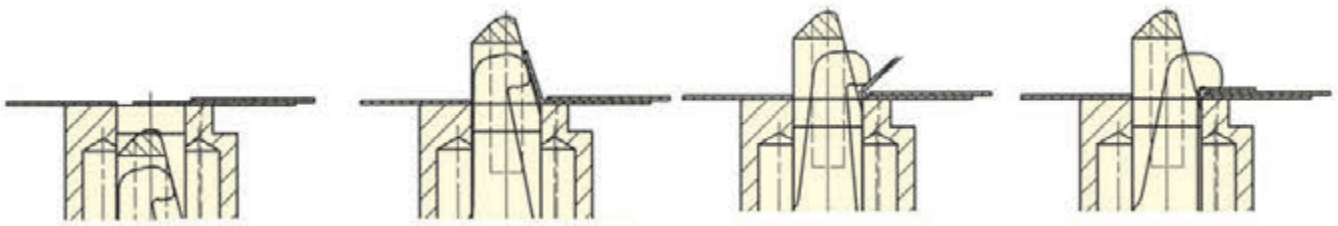

Thread forming



Pneumatic power press unit for stamping of indentations into sheet metal components via punch and die

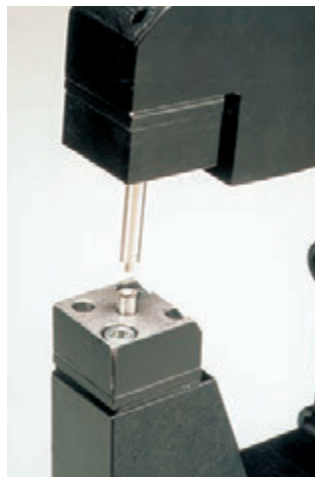




Flanging fuel tank hole




FORMING

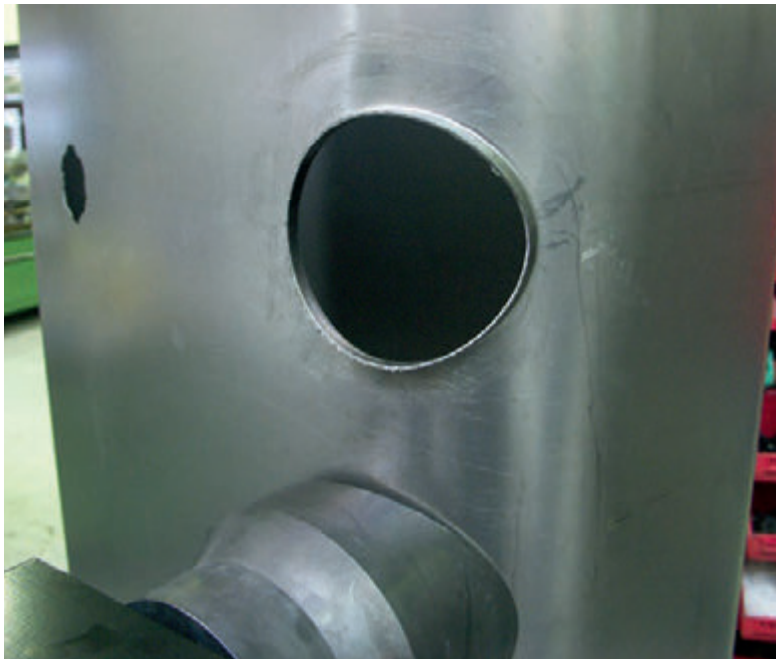

FORMING

Power Press Technology






Power Press Technology

We offer a broad range of forming tools with our C-frame systems and power press units.

C-frame system as clinching unit




power press unit for stamping

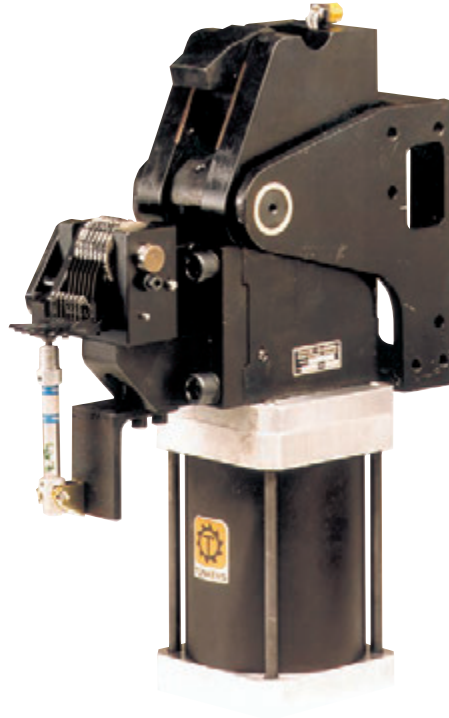

FORMING

In combination with pneumatic, hydraulic, multi-force and HydroAir cylinder, suitable solutions can be found for almost every case of application.


In special cases, we are also happy to develop customised units for your forming application.

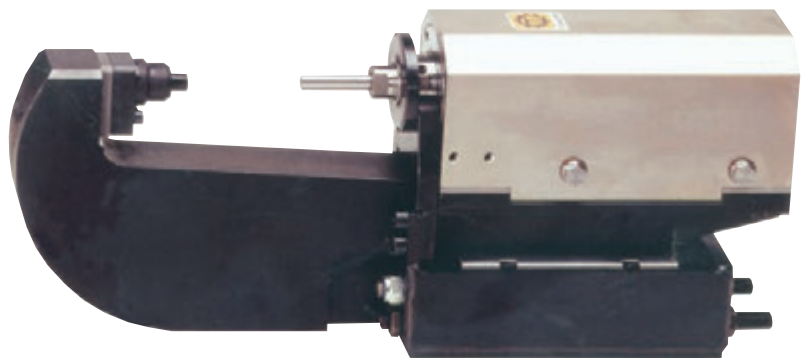

Drives

An extensive series of precision cylinders for linear feed of the tool for forming presses with capacities from 10 to 200 kN. The product range includes four types of cylinder:

- Servo-electric cylinders
Servo-motor with reduction gear unit and planetary roller drive
- Pneumatic cylinder
Alternatively in flat design or as conventional round cylinder
- Multi-force cylinder
Pneumatic drive with integrated mechanical force transmission, operating pressure of 4 to 6 bar
- HydroAir cylinder
Pneumatichydraulic device for power transmission in U- or G-design for operating pressures of 5 to 10 bar
- Hydraulic cylinder
Solid steel, monoblock design for operating pressures of 100 to 200 bar

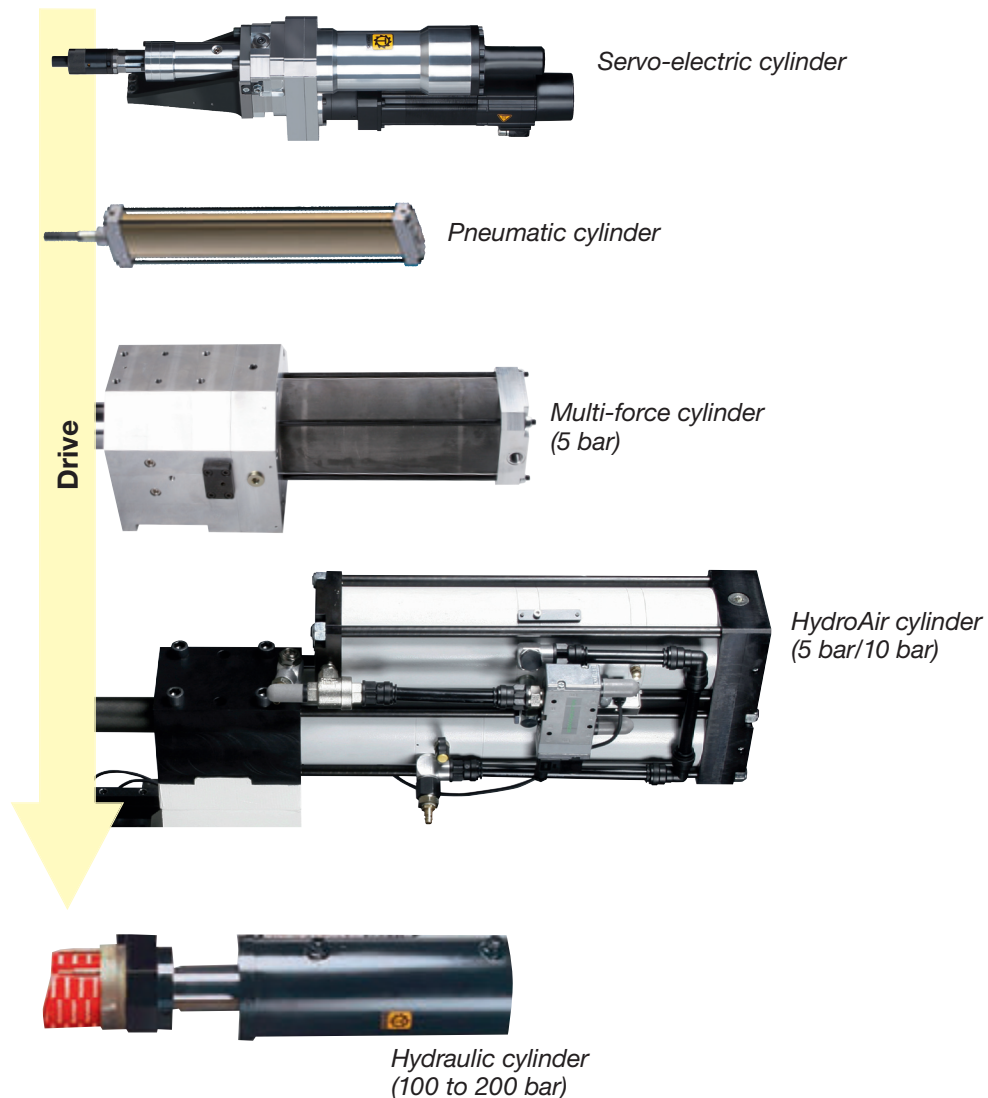

All TÜNKERS power cylinders combine drives and precision guides in one housing.

Design advantages:

- no separate C-frame tool guides required
- easy connection of the cylinder unit to the C-frame via the side flange connection directly on the C-frame



Servo-electric Cylinders





Electric servo drive mechanism with integral reduction gear and spindle guide.

With particular regard to the improved control properties and the optimisation of energy costs, electric drive mechanisms are becoming increasingly popular in the field of forming technology. Based on these requirements, in recent years we have developed a comprehensive series of servo-electric drive mechanisms, with a performance spectrum between 30 and 250 kN.

The design principle was developed from the well-proven structure, with a servo-motor and a reduction gear unit, which transmits the applied force to the piston rod by means of an exceptionally robust planetary roller gear. In standard form, the systems are self-lubricated with grease, with an operating life of 500,000 cycles. In the new version, as an option we offer a gear unit with oil lubrication for continuous loads, which is particularly recommended for high-performance workstations in car production.

By virtue of the optimised control properties, servo-electric drive mechanisms are not only suitable for straightforward punching and stamping applications but also for joining operations – such as clinching and setting of piercing nuts. A particular advantage is offered by the use of a process monitoring system, with which the process is not only monitored but also continuously documented.

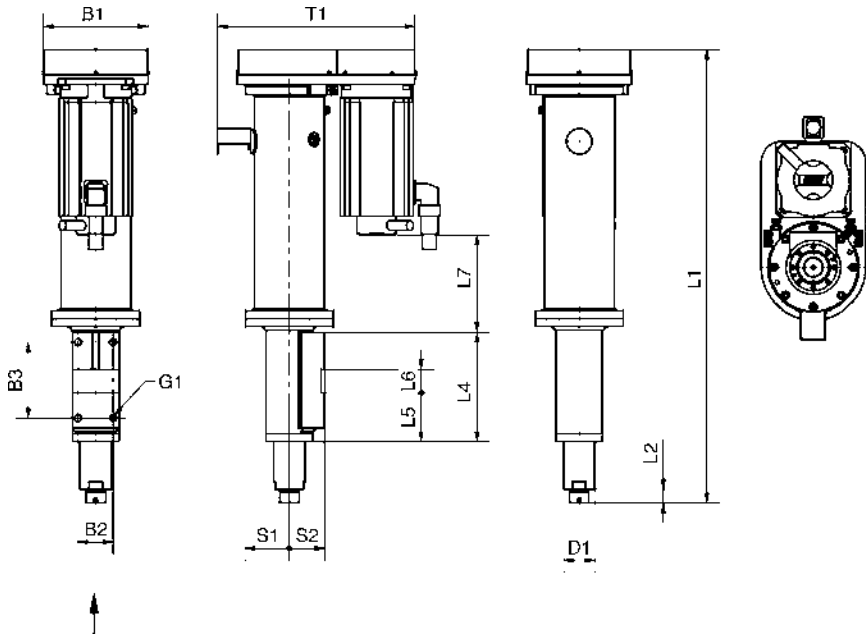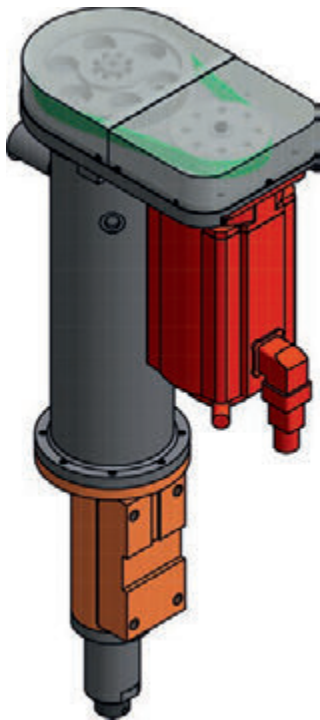

- Main body made of steel
- Transfer mechanism with helical gearing
- Servo-motor
- Stroke 100 to 360 mm
- Force range 30 to 80 kN



FORMING

Ordering example:
EZ 80 250
↓ ↓ ↓
Type Force Stroke

Type	Piston rod dia. D1	Overall length L1	Clear piston length L2	Mounting flange length L4	Lock lower edge L5	Lock height L6	Flange/ motor clearance L7	Max. width B1	Max. depth T1	Interference edge S1	Throat depth S2	Hole pattern width B2	Hole pattern height B3	Thread G1
EZ 80	80	1163	35	280	125	60	249	268	493	113	90	90	195	M20

Subject to technical modifications.

Servo-electric Cylinder EZ 150...250

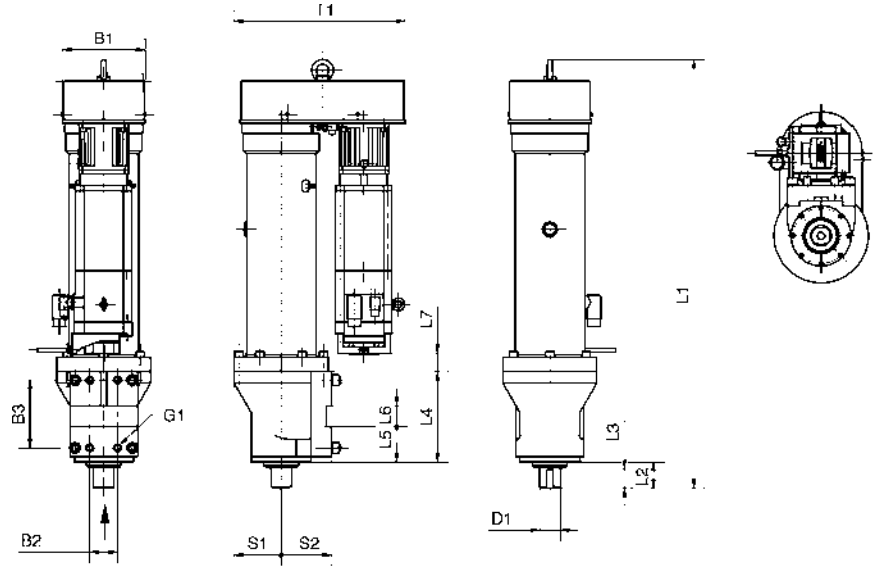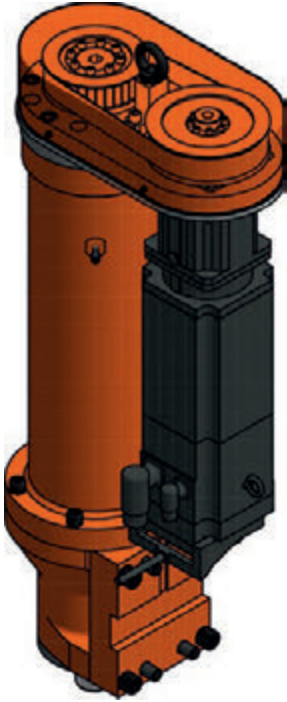

FORMING

- Main body made of steel
- Transfer mechanism with helical gearing
- Servo-motor
- Stroke 100 to 350 mm
- Force range 150 to 250 kN

Ordering example:

EZ 250 250
 ↳ Type ↳ Force ↳ Stroke

Type	Piston rod dia. D1	Overall length L1	Clear piston length L2	Mountings-länge L4	Lock lower edge L5	Lock height L6	Flange/ motor clearance L7	Max. width B1	Max. depth T1	Interference edge S1	Throat depth S2	Hole pattern width B2	Hole pattern height B3	Thread G1
EZ 250	60	1234,5	75	261	101	60	52,3	238	493	135,5	145	80	195	M20

Subject to technical modifications.

Multi-force cylinder – Pneumatic drive with mechanical power transmission

The limits of pneumatic drives are quickly reached when extremely high forces are required. Due to large installation space requirements and air consumption, such systems prove to be uneconomical.

However, most applications rely on the same requirement: Power is needed only in the end position, i.e. last millimeters of stroke!

The new TÜNKERS multi-force cylinder implements this requirement profile, by means of a remarkably simple pneumatic-mechanical solution. A conventional pneumatic cylinder affects a power press mechanism in the end position – where the power is needed – and generates a force intensification of 1:8 to 1:10.


With press forces of up to 8 tons (80 kN), multi-force cylinders are suitable for diverse tasks, e.g. linear positioning, clamping, stamping, clinching, punching, bending and nut setting.

Therefore, applications are available which were restricted to hydraulic systems due to installation space and force requirements.


Multi-force cylinders – the power alternative!




Toggle lever mechanism
–
high force transmission and safe positioning in case of pressure loss

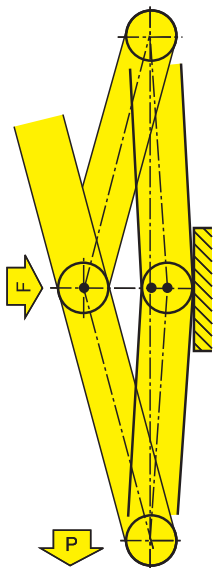


Anti-rotating guide and slim design to flat cylinder such as MZ 40-80




Operational principle multi-force cylinder

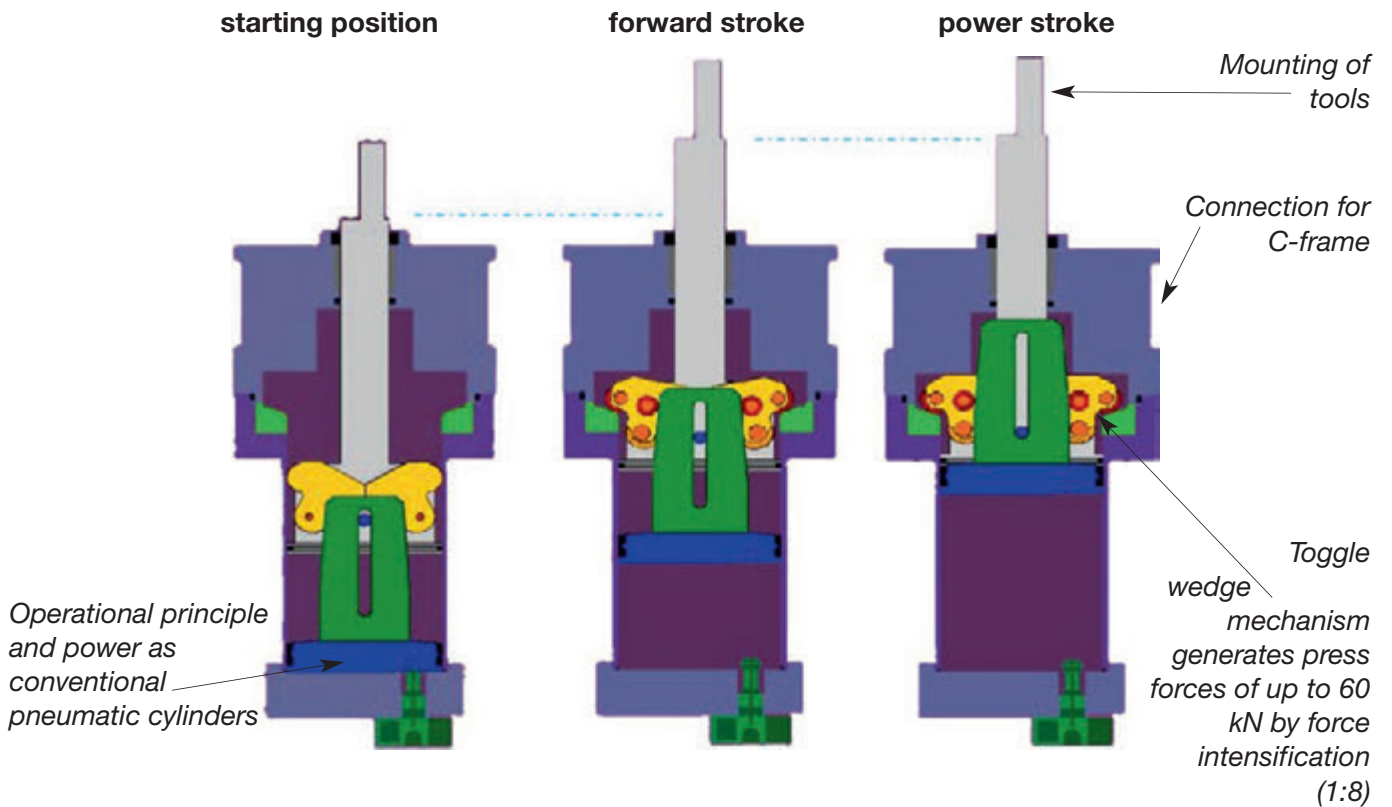

Force - Way diagram

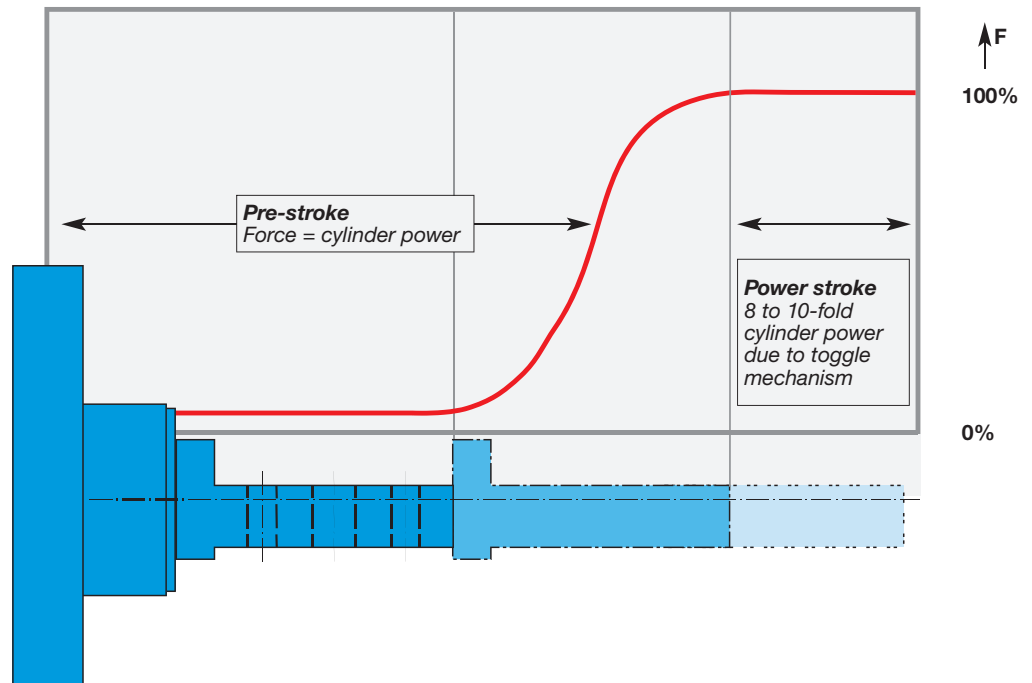

Umformen
↓
Forming

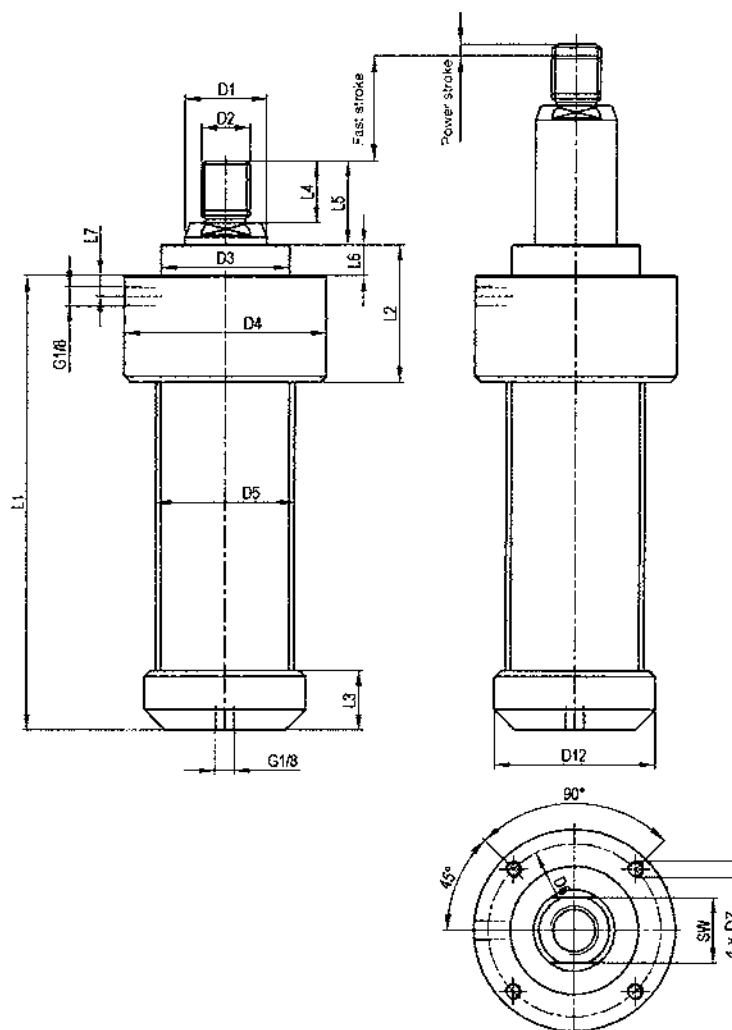


- Configuration B Dowel hole**
- 
- Technical drawing showing the cross-section of Configuration B Dowel hole. The hole has a diameter of $D8$ at the top, $D9$ in the middle, and $D10$ at the bottom. The total height of the hole is 8 . The distance from the top surface to the start of the $D9$ section is 6.1 . The distance from the top surface to the start of the $D10$ section is 10.1 . The distance from the top surface to the bottom of the hole is 12.1 .

Type	Clamping force of the power stroke at 6 bar (kN)	Power stroke (mm)	Fast stroke force of the fast stroke at 6 bar (kN)	Dependent on piston dia. (mm)	Weight ~ (kg)
MZR 40	4	6	0,7	40	1,8
MZR 63	10	6	1.75	63	5

Type	D1 H7	D2	D3 H7	D4	D5	D6	D7	D8 H7	D9 H7	D10	D11	D12	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	SW
MZR 40	25	M16x 1,5	40	63	45	54	M5	25	10	M6	M8	54	130+ Stroke	51	23,5	20	29	12	10	25	15	41	21
MZR 63	40	M24	63	99	68	85	M8	30	16	M8	M12	79	172+ Stroke	67	29	30	41	15	10	40	20	56	32

FORMING

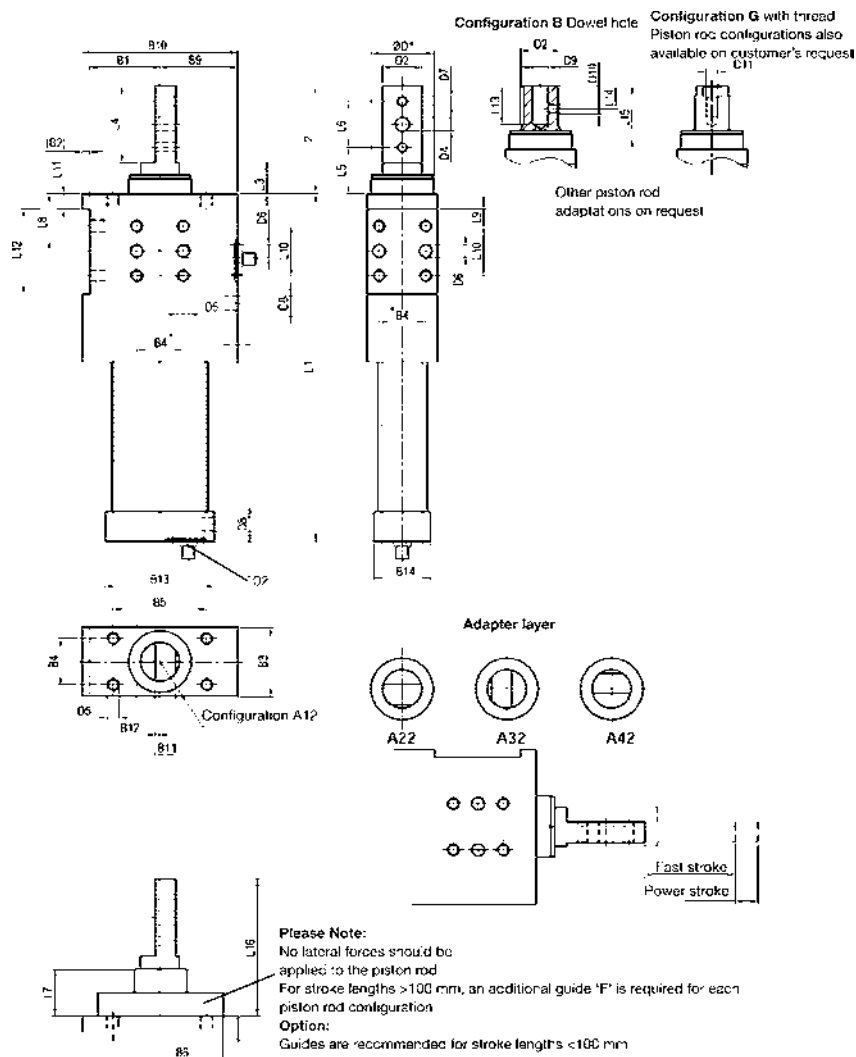

- Main body made of aluminum
- Transfer mechanism made of steel
- Pneumatic drive mechanism with slim cylinder
- Operating pressure 4 to 6 bar
- Power transmitted via wedge mechanism for defined power stroke
- Stroke 50 to 300 mm

Ordering example:

MZ F 40 V 120 A12 T02

→ Type

→ F = Optional: with additional guide

→ V = Optional: with lock

→ Stroke

→ Adapter position or configuration

→ Position sensing system

Fast stroke min. 15 mm
Standard series of fast strokes: 50; 100; 150 mm
(does not include the 6 mm power stroke)

Other special stroke lengths on request, up to max. 300 mm




Type	Clamping force of the power stroke (kN)	Power stroke (mm)	Fast stroke force at 6 bar (kN)	Dependent on piston dia. (mm)
MZ 40	4	6	0,7	40
MZ 63	10	6	1,75	63
MZ 80	25	6	2,8	80

Type	B1 ±0,02	B2	B3	B4	B5 ±0,2	B6	B9	B10	B11	B12	B13 ±0,05	B14	D1	D2 T7	D3 T7	D4 H7	D5	D6 H7	D7 H7	D8	D9 H7	D10	D11
MZ 40	45	5	45	30	60	80	50	100	13	3	70	45	40	25	10	9	M8	8	6	G1/8	10	M6	M8
MZ 63	75	5	60	30	85	105	80	160	15	3	120	45	55	30	15	9	M8	8	6	G1/8	16	M8	M12
MZ 80	92	8	80	50	100	125	100	200	20	3	140	62	75	40	25	11	M10	8	8	G1/4	20	M10	M16

Type	L1	L2	L3	L4	L5	L6 ±0,02	L7	L8 ±0,05	L9 ±0,1	L10 ±0,1	L11	L12 ±0,1	L13	L14	L15	L16
MZ 40	195+Stroke	70	12	50	30	30	45	37	11	32	10	55	25	15	41	115
MZ 63	250+Stroke	70	12	50	30	30	55	37	11	32	10	55	40	20	56	125
MZ 80	340+Stroke	80	20	50	40	30	81	55	15	50	15	80	40	20	80	161



Subject to technical modifications.

Multi-force Cylinders MZ 100 und MZ 140

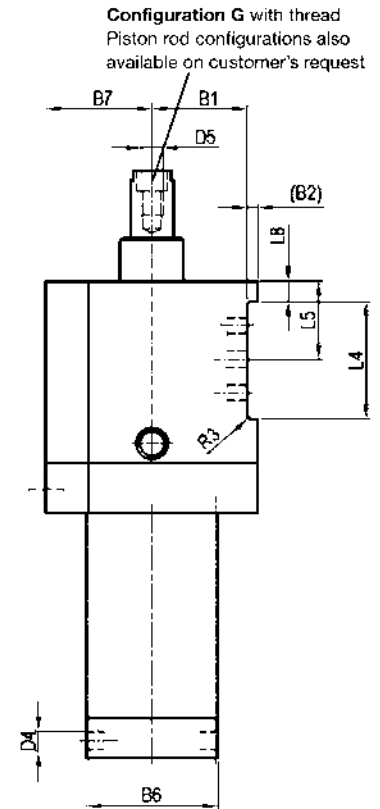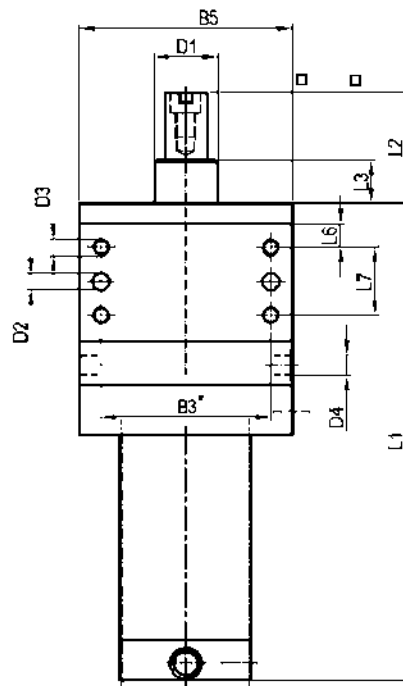

- Main body made of high-strength aluminum material with integral piston rod guide
- Steel transfer mechanism
- Pneumatic drive mechanism with circular-section cylinder
- Operating pressure 4 to 6 bar
- Power transmitted via wedge mechanism for defined power stroke
- Stroke 50-200 mm

Configuration B Dowel hole

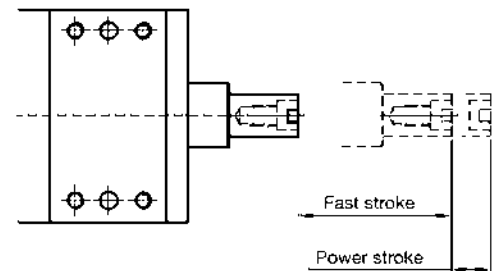

Type	Clamping force of the power stroke (kN)	Power stroke (mm)	Fast stroke force at 6 bar (kN)	Piston dia. (mm)
MZ 100	45	6	4,3	100
MZ 140	60	6	8,5	140

Ordering example:


MZ 100 120
 ↳ Stroke
 ↳ Piston dia.
 ↳ Type

Fast stroke min. 15 mm
 Standard series of fast strokes: 50; 100; 150 mm (does not include the 6 mm power stroke)


Other special stroke lengths on request, up to max. 300 mm

Type	B1 ±0,2	B2	B3	B4	B5	B6	B7 ±0,05	D1	D2 H7	D3 H7	D4 H7	D5	D6	L1	L2	L3	L4 -0,03 -0,04	L5 ±0,05	L6 ±0,1	L7 ±0,1	L8
MZ 100	75	15	140	42	180	114	90	63	10	M12	G1/4	M16	20	356+Stroke	139	69	80	65	15	50	25
MZ 140	107,5	17,5	210	42	250	155	125	80	10	M16	G1/2	M16	20	506+Stroke	139	69	120	85	22,5	75	25

Subject to technical modifications.

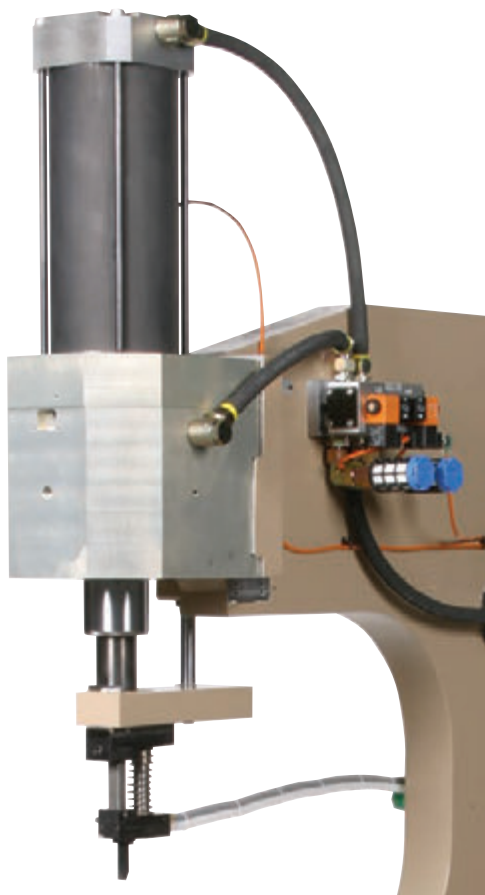

MZ 100 with piston rod guide, 60 kN, 150 mm stroke, for nut piercing operations

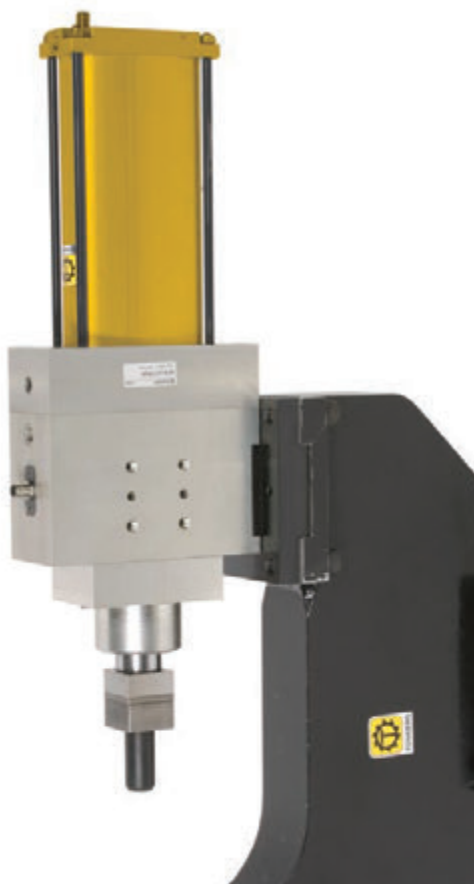


MZ 80 with piston rod guide, 25 kN, 100 mm stroke, for hole punching operations

Overview of performance data

Type	Press force kN	Ø Cylinder mm	approx. length (with 50 mm stroke)	Width mm
MZR 40	4	40	220	63
MZR 63	10	63	280	99
MZ 40	4	40	315	100
MZ 63	10	63	370	160
MZ 80	25	80	470	200
MZ 100	45	100	545	180
MZ 140	60	140	695	250

Hydraulic / pneumatic power transmission for drive forces of up to 200 kN (20 tons) with the following technical features:

- Division of the cylinder stroke into a solely pneumatically actuated fast stroke and a power stroke generated by hydraulics
- Automatic switching to power stroke via integrated pressure switch
- Defined power stroke of 6 or 12 mm length, constantly provided for the forming process within this range
- Speedy positioning and opening to generate short cycle times
- Absolute separation of air and oil
- Cylinder backstroke with wear resistant springs

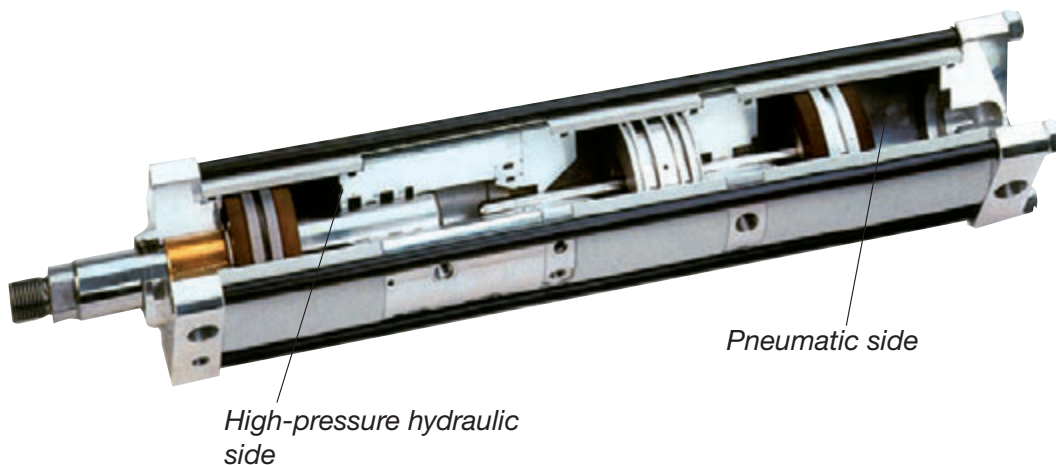

Operating principle:

The power unit contains three cylinder sections:

- Working piston
hydraulically actuated on both ends
- Adjustment piston
hydraulically actuated toward the power piston, pneumatically actuated toward the plunger piston
- Plunger piston
pneumatically actuated

1. Initial state


Working, adjustment and plunger piston are in initial highest position. Through impact pressure, the adjustment piston causes the oil to flow to the opposite side and the working piston to move.

2. Fast stroke

In fast stroke, the adjustment piston moves the working piston into pre-position via the shared oil pressure chamber.

3. Power stroke


The power stroke is actuated when a defined working position (end position switch) or the pre-defined pressure on the hydraulic side (pressure switch) is reached. To this end, the plunger piston is pressurised and its piston rod end moves into the pressure chamber of the working piston. The constant force applied over the entire length of the power stroke, results from the area ratio of piston rod and plunger piston.

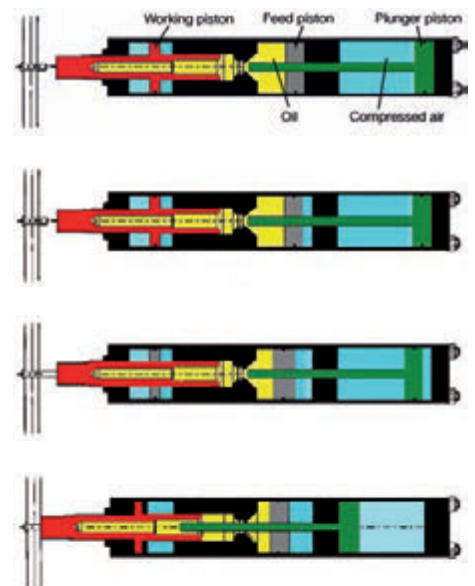




Configurations

The HydroAir Cylinder is available in two different standard configurations:

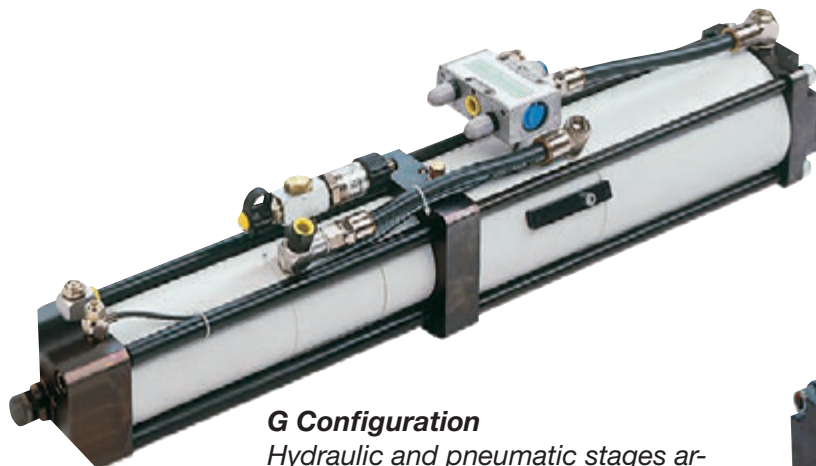

G Configuration

Hydraulic and pneumatic stages arranged in tandem (straight) in a slimmer but longer subassembly

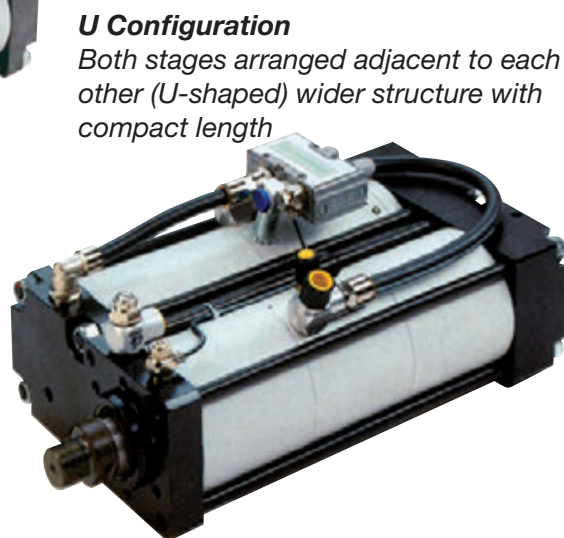


U Configuration

Both stages arranged adjacent to each other (U-shaped) wider structure with compact length

Options:

- Fluid level monitoring, optionally with either electrical, pneumatic or acoustic output signal
- Electrical pressure switch, 0 to 400 bar, with display, optionally with distribution unit, so that the high pressure metering connection is still available
- Fluid/pressure sensor, 0 to 400 bar, with analogue output 0 to 10 V (force measurement)
- Configurations with separate working and transmission sections


Typical application

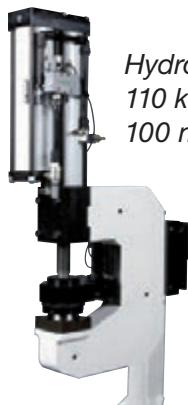


HydroAir Cylinder, U Configuration,
110 kN compression force,
100 mm stroke for crimping steel sheet


Usable force range

The nominal forces quoted in the technical data relate to an operating pressure of 5 or 6 bar. Since the gear transmission ratio between the hydraulic and the pneumatic stages in each cylinder is constant, the force is directly proportional to the particular operating pressure. The entire sealing system is designed for a maximum pressure of 6 bar. Higher operating pressures can result in failure of the cylinder system. For this reason, for preference the configuration of the drive mechanism should be compatible with an operating pressure of 5 bar.

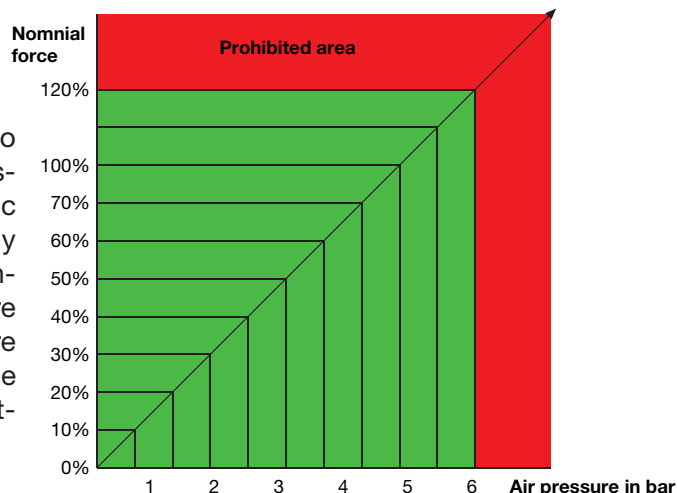

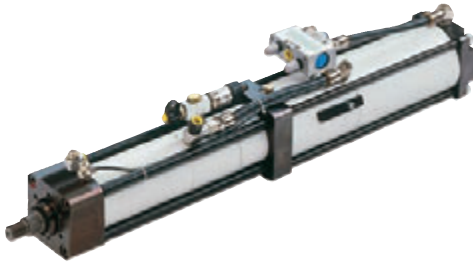

- Main body in high-strength aluminum material with integral piston rod guide
- In-line arrangement of the hydraulic and pneumatic stages
- Pneumatic drive mechanism with circular-section cylinder
- Operating pressure 4 to 6 bar
- Power transmitted via hydraulic / pneumatic transducer
- Stroke 50 to 250 mm

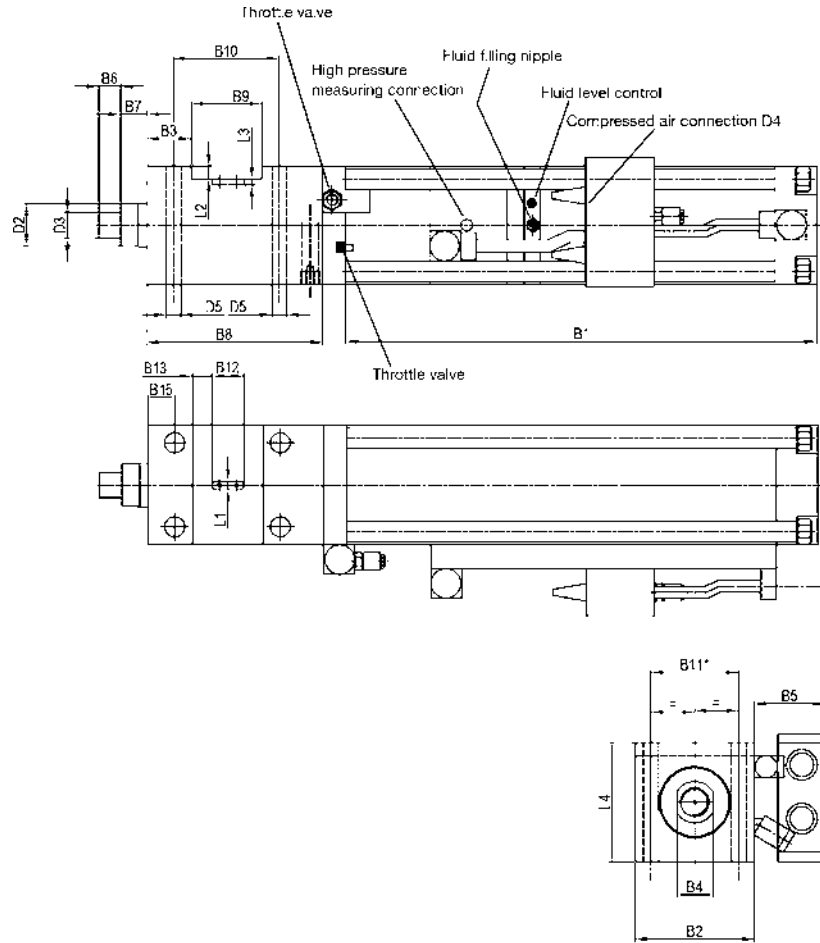

Ordering example:

HAZG 65 50 6

→ Type
→ Nominal force kN (5 bar)
→ Stroke, including power stroke length
→ Power stroke length

Type HAZG 65

Total stroke length 50 100 150 200 250
Power stroke length B1
6 588 706 824 942 1060

Type HAZG 110

Total stroke length 50 100 150 200 250
Power stroke length B1
6 735 860 980 1105 1225

Type HAZG 240

Total stroke length 50 100 150 200 250
Power stroke length B1
6 795 923 1069 1189 -

Type	Nominal force at 5 bar (kN)	Nominal force at 6 bar (kN)
HAZG 65	65 kN	80 kN
HAZG 110	110 kN	137 kN
HAZG 240	240 kN	290 kN


Type	B2	B3	B4	B5	B6 ±0,2	B7	B8	B9	B10 H7	B11* ±0,2	B12	B13	D1	D2 H7	D3	D4	D5	L1 P9	L2	L3 ±0,1	L4
HAZG 65	110	50	36	60	25	35	170	60	100	85	36	12	30	45	M30x2	G1/2	13	10	10	5	110
HAZG 110	135	50	41	60	35	36	200	80	120	100	36	22	30	50	M39x2	G1/2	17	10	15	5	135
HAZG 240	175	60	50	85	35	47	273	80	180	136	36	22	30	56	M42x2	G1/2	22	10	15	5	175

Subject to technical modifications.



FORMING

- Main body in high-strength aluminum material with integral piston rod guide
- Hydraulic and pneumatic stages arranged in parallel, in U-form
- Pneumatic drive mechanism with circular-section cylinder
- Operating pressure 4 to 6 bar
- Power transmitted via hydraulic / pneumatic transducer
- Stroke 50 to 250 mm

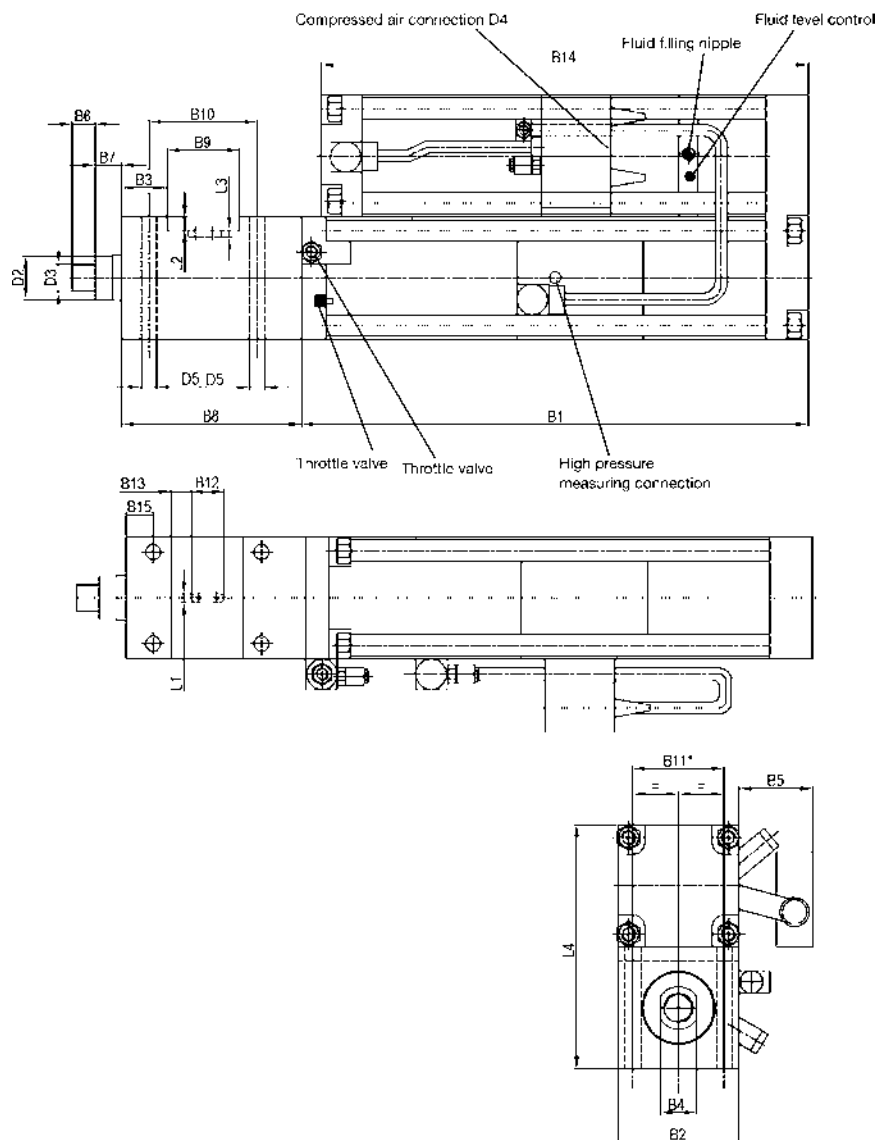

Ordering example:

HAZU 65 50 6

→ Power stroke length

→ Stroke

→ Nominal force kN (5 bar)

→ Type

Type HAZU 65						
Total stroke length 50	100	150	200	250	300	
Power stroke length	B1/B14					
6	597/578	646/629	699/680	750/731	801/782	852/833
Type HAZU 110						
Total stroke length 50	100	150	200	250	300	
Power stroke length	B1/B14					
6	645/621	703/679	761/737	819/795	877/853	935/911
Type HAZU 240						
Total stroke length 50	100	150	200	250	300	
Power stroke length	B1/B14					
6	857/820	942/905	1022/985	1107/1070	1187/1150	1267/1230

Type	Nominal force at 5 bar (kN)	Nominal force at 6 bar (kN)
HAZU 65	65 kN	80 kN
HAZU 110	110 kN	137 kN
HAZU 240	240 kN	290 kN

Type	B2	B3	B4	B5	B6 ±0,2	B7	B8	B9	B10 H7	B11* ±0,2	B12	B13	D1	D2 f7	D3	D4	D5	L1 P9	L2	L3	L4 ±0,1
HAZU 65	110	50	36	60	25	35	170	60	100	85	36	12	30	45	M30x2	G1/2	13	10	10	5	222
HAZU 110	135	50	41	60	35	36	200	80	120	100	36	22	30	50	M30x2	G1/2	17	10	15	5	274
HAZU 240	175	60	50	85	35	47	273	80	180	136	36	22	30	56	M39x2	G1/2	22	10	15	5	354

Subject to technical modifications.


These drive units are special cylinders produced by us, which are designed to meet the extreme requirements of forming tasks. Large-size piston rods guided by a long precision bushing are used to accommodate lateral forces. The housings in block design allow for easy flanging to the C-frame systems.

The high-performance range of TÜNKERS hydraulic cylinders are conceived for a range of 20 to 200 kN. We would be pleased to manufacture customised sizes upon request.

Construction principle

Large-dimensioned piston rod, hard chrome plated and ground

Internally polished cylinder barrel

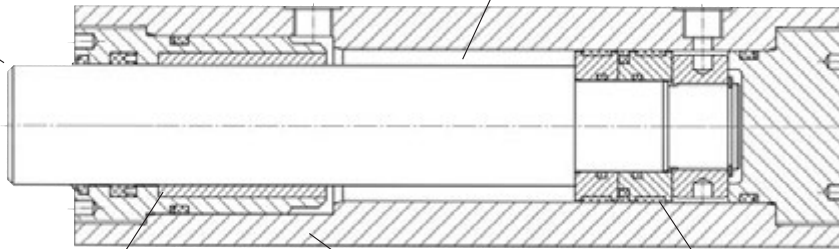

Long high-quality guide bushings provide for secure movement of the piston rod

Solid steel housing in block and round design

Piston with seal and driving band

Application examples




Cylinder in monoblock-design, 80 mm stroke, for clinching operations



Cylinder in round design 150 mm stroke, for hole punching operations

Block cylinder with guide, 50 mm stroke, for seaming operations


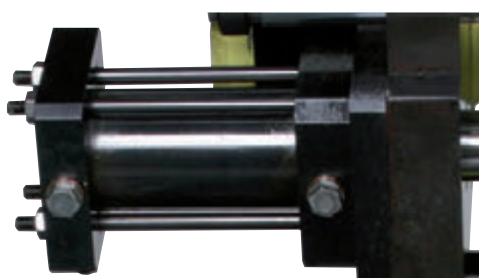


Cylinder in tie rod version, 40 mm stroke, for cutting operations




Hydraulic Cylinder HYZ...

- Main body made of steel
- Adapter block with integral guide
- Operating pressure 100 bar
- Stroke 50 to 200 mm

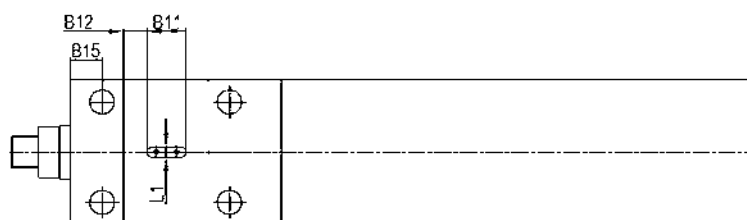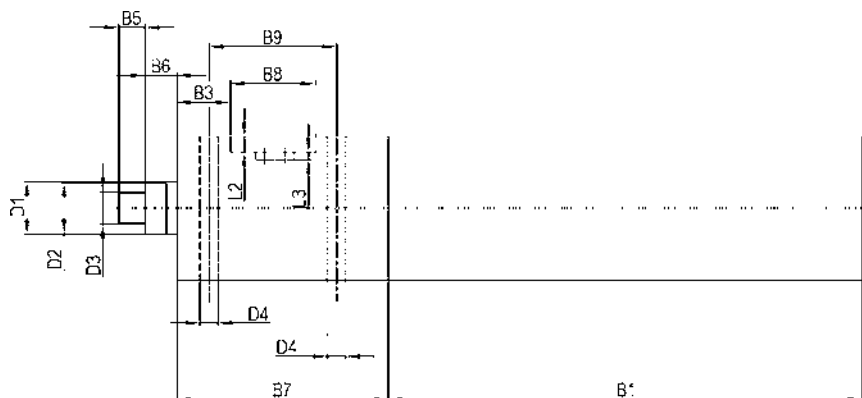

Stroke lengths: 50; 100; 150; 200

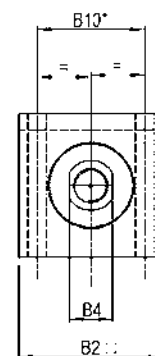

Type	Operating pressure bar	Compression force (kN)	Dependent on piston dia. (mm)	Medium
HYZ 63	100	30	63	Hydraulic oil
HYZ 80	100	50	80	Hydraulic oil
HYZ 100	100	78	100	Hydraulic oil
HYZ 140	100	150	140	Hydraulic oil

Ordering example:

HYZ 100 50
 ↳ Type ↳ Stroke
 ↳ Piston dia.

Type	B2 □	B3	B4	B5	B6	B7	B8 H7	B9 ±0,2	B10	B11	B12	B15	D1	D2 f7	D3	D4	L1 P9	L2	L3 ±0,1
HYZ 63	110	50	36	25	35	170	60	100	85	36	12	30	55	50	M30x2	13	10	10	5
HYZ 80	135	50	41	35	36	200	80	120	100	36	22	30	55	50	M30x2	17	10	15	5
HYZ 100	175	60	50	35	47	273	80	180	136	36	22	30	60	56	M39x2	22	10	15	5
HYZ 140	175	60	50	35	47	273	0	180	136	36	22	30	60	56	M42x2	55	10	15	5

Stroke	50 B1	100 B1	150 B1	200 B1
HYZ 63	200	250	300	350
HYZ 80	200	250	300	350
HYZ 100	200	250	300	350
HYZ 140	200	250	300	350

Subject to technical modifications.

All forming processes are fraught with risk. That is why TÜNKERS forming clamps are extremely rugged on principle and designed for load cycles of over 3 million. The simple mechanical construction of the drive with pneumatic or hydraulic cylinders or power transferring units, ensures that the required forming forces are repeatable at all times. Moreover, all clamps are equipped with limit switches for precise reporting of the working position to the control.

Despite this, disruptions in the production cycle cannot be excluded, e. g. by:


- missing material / component
- wrong material / component (e. g. double sheet layer)
- Tool fracture of stamp or die

The installation of additional system monitoring devices is therefore especially advisable as to automated systems, for instance robotic clamps, without direct operator control.

1. Monitoring of the process force

Verification of the process forces in defined time windows

- Measuring of the reaction forces within the clamp by a force sensor, preferable at the side opposite of the drive (mostly the die).
- Comparison of the process forces with the determined set values.


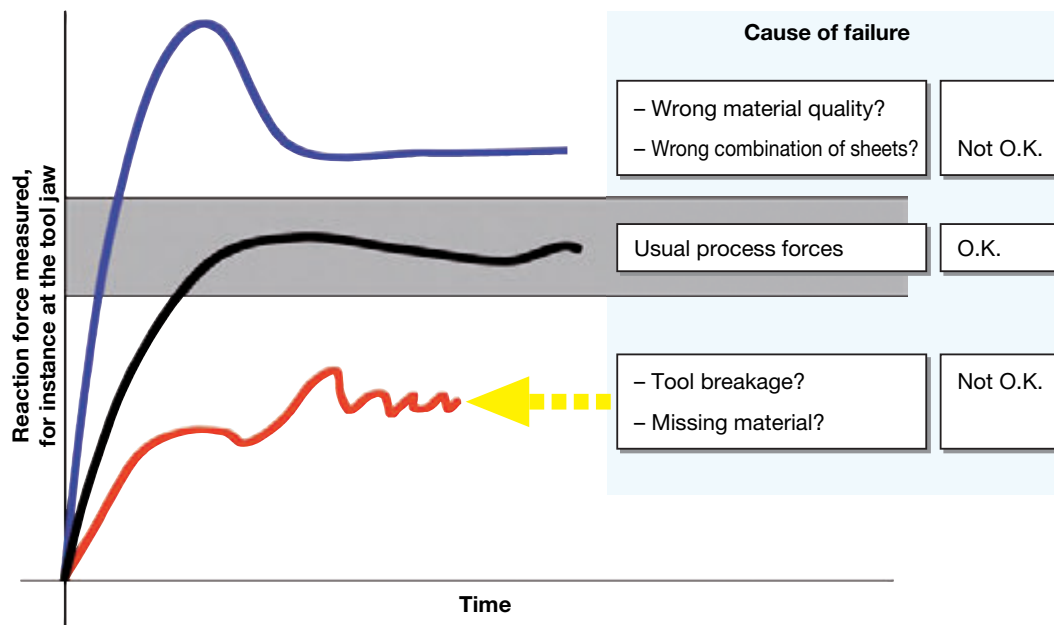


2. Quality monitoring

Analysis of the forming process via mapping of the force / displacement diagram

- Equipment of the clamps with a force and displacement sensor for computation of the actual process trajectory (force/displacement diagram).
- Definition of an envelope curve which reflects flawless forming quality.
- Comparison of the actual process trajectory with the envelope curve, allowing for determination of the forming quality.


Quality analysis
based on envelope
curve

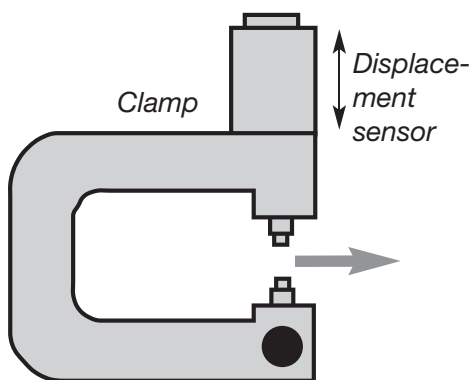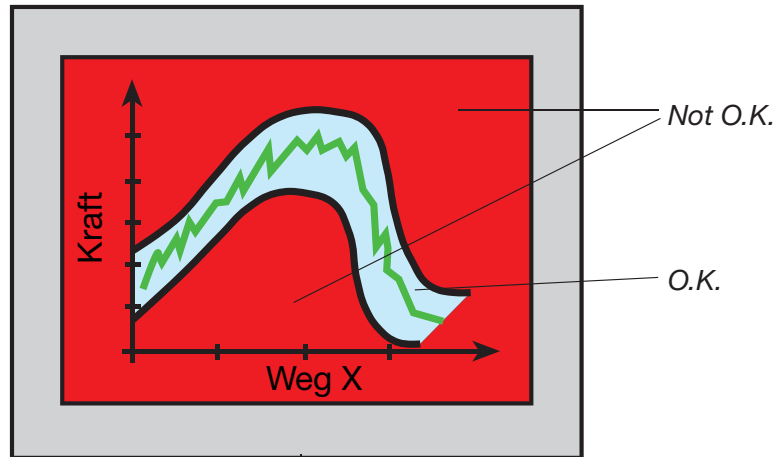

Force sensor
installed at the clamp
side opposite the drive



Monitoring system
Example
Brankamp PK 6000
– Kistler
– HIE




A compact press ready for use, constructed of the 3 basic elements

- C-frame;
- drive;
- tools.

This simple assembly is possible due to the integration of the drive unit which houses the tool guide, end position sensing system and anti-rotating device, if required, next to the actual drive cylinder. Moreover, the mating flange surfaces on the sides allow for a very simple C-frame design.

The hydraulic, multi-force or HydroAir cylinders, described in the chapter on drives, can be optionally used as drives. The C-frames in steel construction are weight-optimised according to the Finite Element Method and adjusted to the relevant application and process forces. In addition to the standards described in the catalogue, we also supply C-frame systems tailored to meet the requirements of your specific application case – for punching, stamping, joining, nut piercing, crimping . . .


Maximum strokes lengths of 300 mm and maximum throat depths of approx. 800 mm, allow for the realisation of large-sized clamp windows on the basis of the simple C-frame construction and therefore a broad field of standard forming applications.

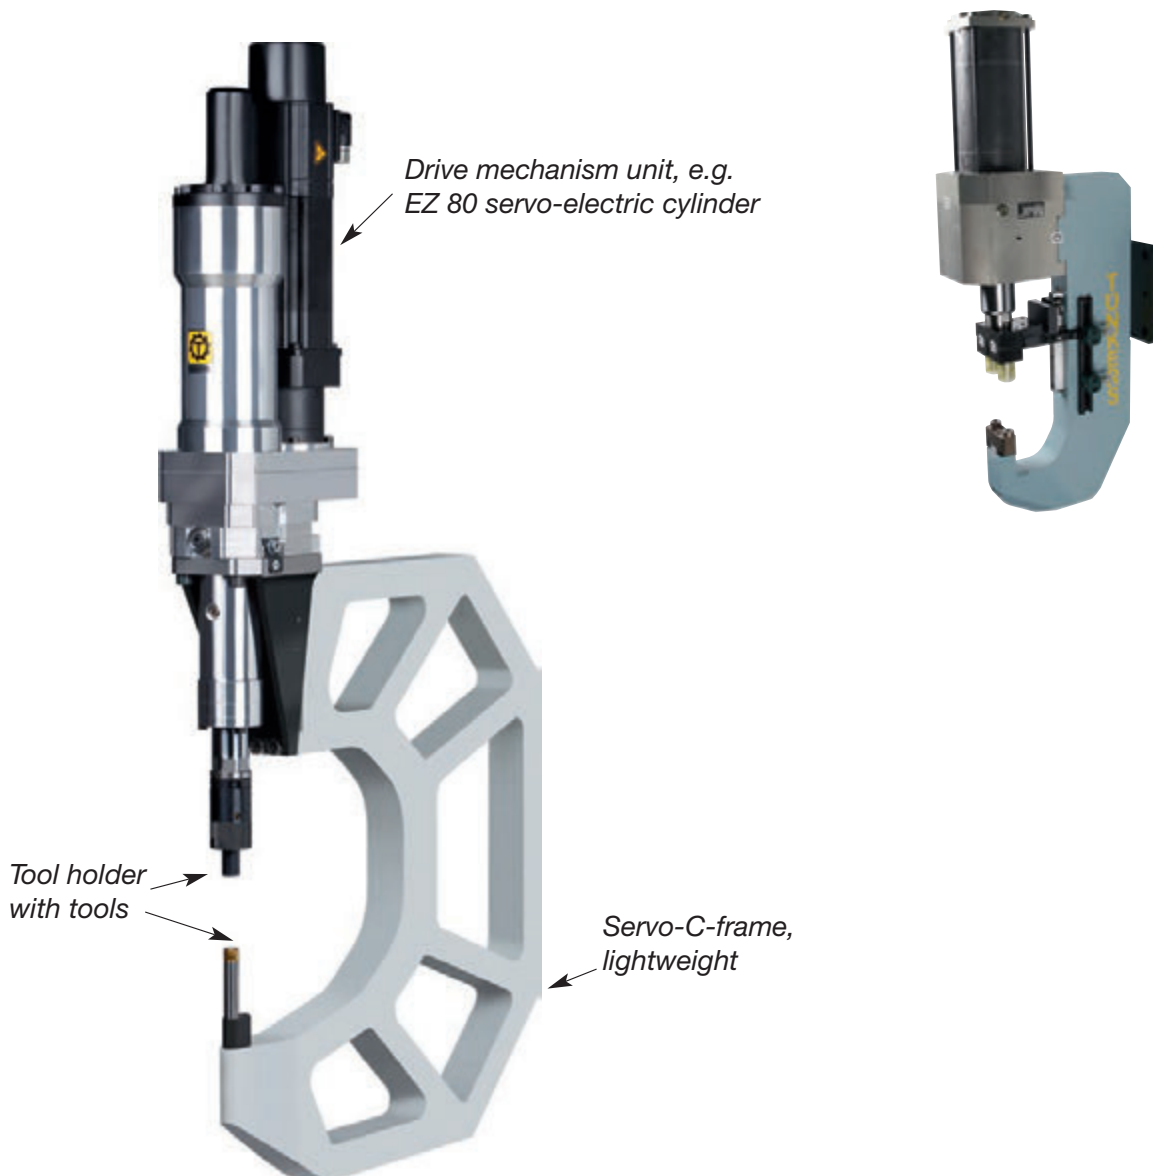



C-frame System CBEZ

- Solid steel C-frame
- Adapter plate to suit customer's specification
- Drive unit with electric servo cylinder
- Ready for operation with tools for forming processes such as punching, stamping and joining
- Options:
 - end position sensing
 - spring-centred bracket
 - process monitoring

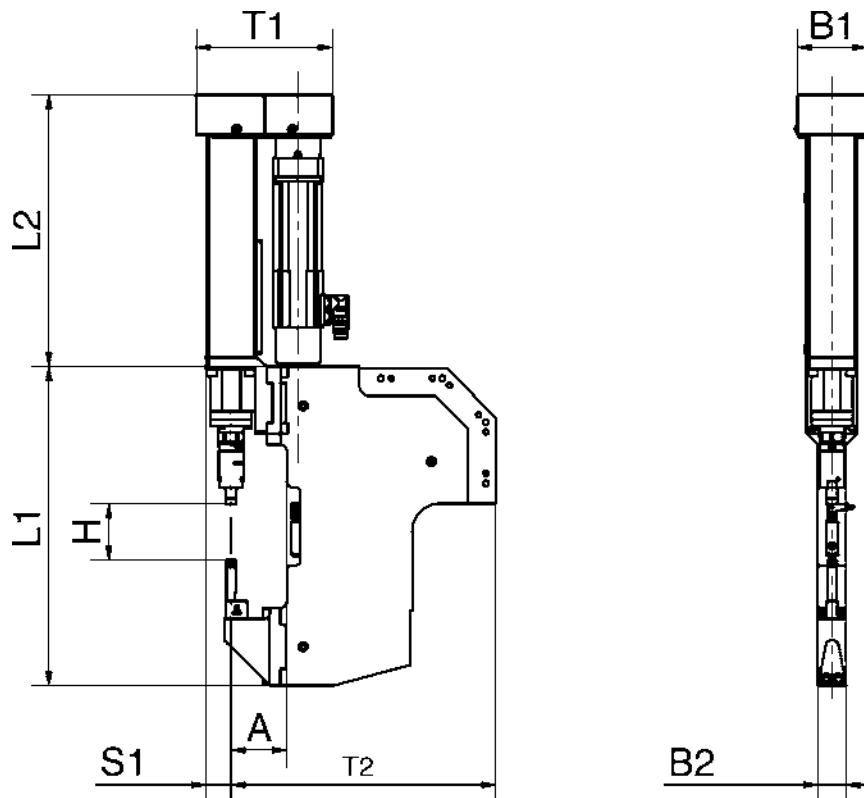

Type	Cylinder force (kN)	Throat depth (A)	Stroke (H)
CBEZ 30	30	140 200 300	100-200
CBEZ 60	60	140 200 300	100-200
CBEZ 80	80	140 200 300	100-200
CBEZ 150	150	235	360
CBEZ 250	250	235	360

Type	L1	L2	B1	B2	T1	T2	H	A	S1
CBEZ 30	678	572	100	50	210	600	200	300	40
CBEZ 60	678	572	130	50	244	600	200	300	45
CBEZ 80	678	572	130	50	244	600	200	300	45
CBEZ 150	1330	700	268	120	500	650	360	235	113
CBEZ 250	1330	900	238	120	500	650	360	235	135

Subject to technical modifications.

Ordering example:


CBEZ80-140-100 80 140 100

Force (kN) Throat depth (mm) Stroke (mm)

Please note:

The dimensions indicated here are standard sizes and can be altered if required.

- Drive unit: Multi-force cylinder with integrated piston rod guide
- Adaptor plate according to customer specifications
- Ready for operation with insert tools for forming, punching, marking, joining processes
- Optional
 - End position sensing
 - Spring-centred bracket
 - Anti-rotating device
 - Process monitoring system

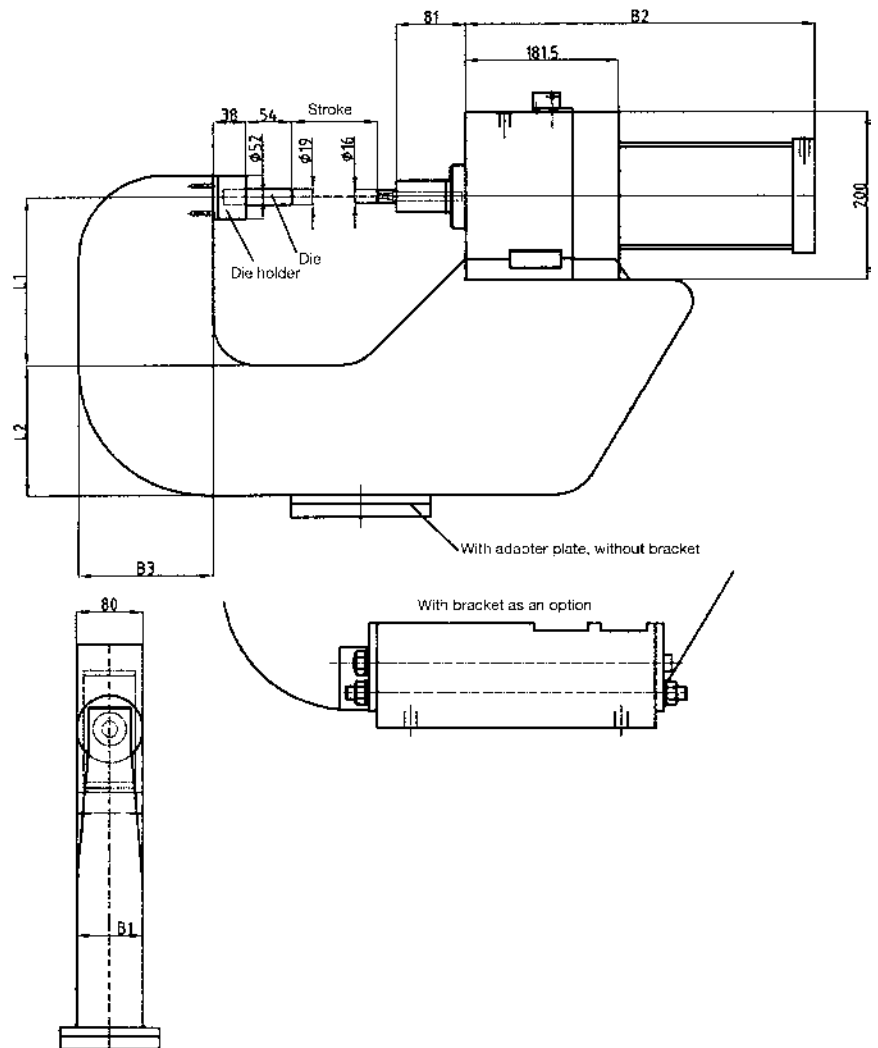

Type	Cylinder force ~ (kN)	Cylinder dia.	Stroke	Power stroke (mm)
CBMZ 10...	10	63	50-150	6
CBMZ 25...	25	80	50-150	6
CBMZ 45...	45	100	50-150	6
CBMZ 60...	60	120	50-150	6

Type	L1	L2	B1	B2	B3
CBMZ 10...	50	100	50	Stroke + 340	100
CBMZ 25...	100	150	50	Stroke + 340	150
CBMZ 45...	150	250	60	Stroke + 340	200

Subject to technical modifications.


Ordering example:

CBMZ10 100 100 F
 ↓ ↓ ↓
 Throat depth (L1) Stroke Force (kN) / frame size
 Joining

Please note:

The dimensions indicated here are standard sizes and can be altered if required.

- Drive unit: HydroAir cylinder with integrated piston rod guide
- Adaptor plate according to customer specifications
- Ready for operation with insert tools for forming, punching, marking, joining processes
- Optional
 - End position sensing
 - Spring-centred bracket
 - Anti-rotating device
 - Process monitoring system

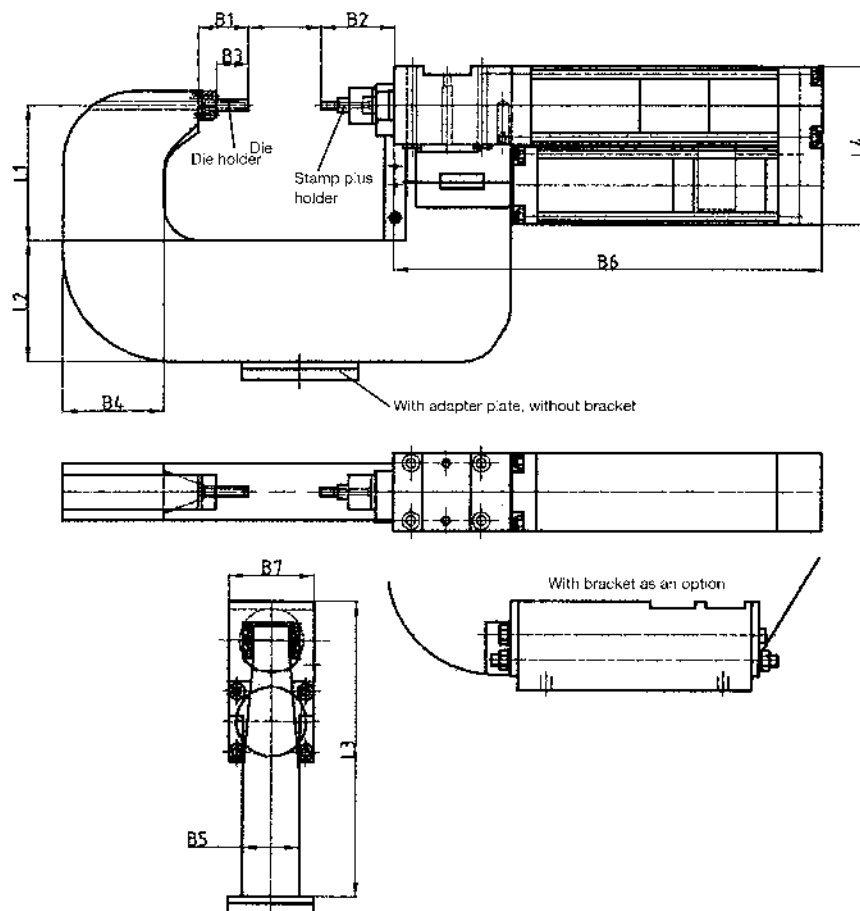

Ordering example:

CBHA 15 50 100 F

Force (kN) Stroke Throat depth (L1) Joining

Please note:

The measurements stated here are reference values which are adjusted as required.


Type	Cylinder force ~ (kN)	Cylinder dia.	Stroke	Power stroke (mm)
CBHA 65	65	80	50-150	6
CBHA 110	110	100	50-150	6

Type	L1	L2	L3	L4	B1	B2	B3	B4	B5	B6	B7
CBHA 65	50	100	317	222	67	150	15	100	80	559+Stroke	110
CBHA 65	100	150	417	222	67	150	15	150	80	518+Stroke	110
CBHA 65	200	300	667	222	67	150	15	300	80	507+Stroke	110
CBHA 110	50	100	357	274	67	150	15	100	120	626+Stroke	135
CBHA 110	100	150	457	274	67	150	15	150	120	594+Stroke	135
CBHA 110	200	300	707	274	67	150	15	300	120	562+Stroke	135

Subject to technical modifications.

Other variants on request.

- C-frame in solid steel construction
- Adaptor plate according to customer specifications
- Drive unit: Hydraulic cylinder with integrated piston rod guide
- Ready for operation with insert tools for forming, punching, marking, joining processes
- Optional
 - End position sensing
 - Spring-centred bracket
 - Anti-rotating device
 - Process monitoring system

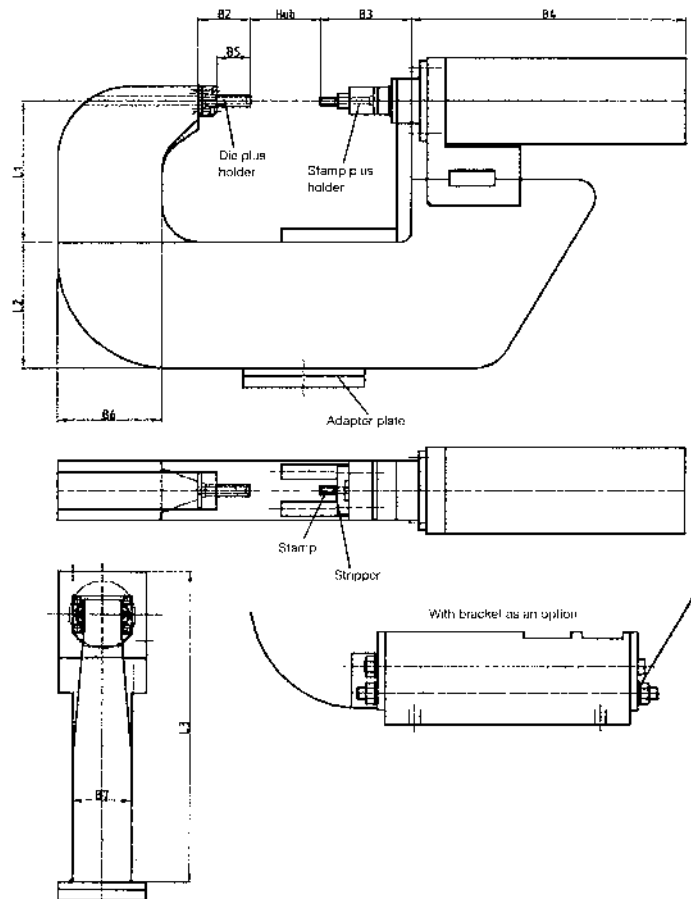

Type	Cylinder-Force ~ (kN)	Cylinder dia.	Stroke
CBHZ 30	30	63	50-200
CBHZ 50	50	80	50-200
CBHZ 80	80	100	50-200
CBHZ 150	150	140	50-200
CBHZ 300	300	160	50-200

Type	L1	L2	L3	B2	B3	B4	B5	B6	B7
CBHZ 30	50	100	188	36	98	Stroke x 2,5	15	100	50
CBHZ 30	100	150	288	36	98	Stroke x 2,5	15	150	50
CBHZ 30	200	300	538	36	98	Stroke x 2,5	15	300	50
CBHZ 50	50	100	200	36	98	Stroke x 2,5	15	100	60
CBHZ 50	100	150	300	36	98	Stroke x 2,5	15	150	60
CBHZ 50	200	300	550	36	98	Stroke x 2,5	15	300	60
CBHZ 80	50	100	210	67	100	Stroke x 2,5	15	100	80
CBHZ 80	100	150	310	67	100	Stroke x 2,5	15	150	80
CBHZ 80	200	300	560	67	100	Stroke x 2,5	15	300	80
CBHZ 150	50	100	235	67	100	Stroke x 2,5	15	100	120
CBHZ 150	100	150	335	67	100	Stroke x 2,5	15	150	120
CBHZ 150	200	300	585	67	100	Stroke x 2,5	15	300	120
CBHZ 300	200	300	585	67	100	Stroke x 5	15	300	120

Subject to technical modifications.

Ordering example:

CBHZ 30 50 50 F

Force (kN) Throat depth (L1) Stroke Joining

Order code TÜNKERS position sensing systems:


T12 Inductive proximity switch, 24 V
resistant to fluid pressure
Operating pressure: 100 bar
Medium: Hydraulic fluid

Please note:


The dimensions indicated here are standard sizes and can be altered if required.
Other variants on request.

Our C-frame systems are individually adjusted to the relevant application. Therefore, the technical dimensioned drawings serve as guidelines for your pre-design.


CBMZ series for joining operations

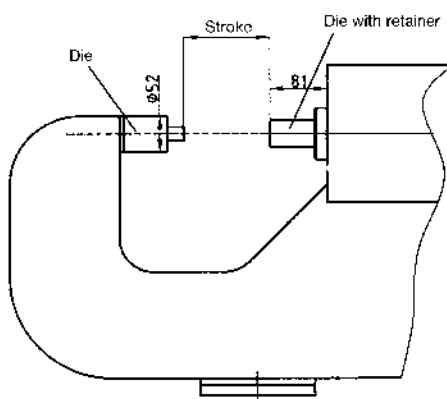


CBMZ series for punching operations

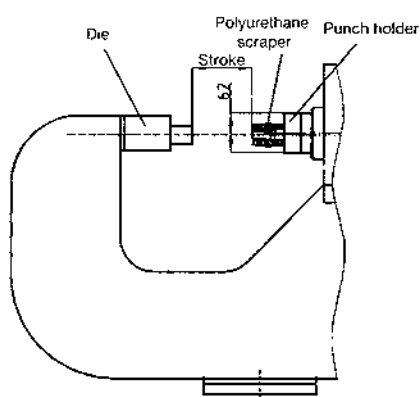

CBMZ series for marking operations



CBMZ series for marking operations (with type holder)



CB MZ 25 140 100 S T12

TYPE: _____

Drive mechanism:

PZ = Pneumatic cylinder
MZ = Multi-force cylinder
HA = HydroAir cylinder
HZ = Hydraulic cylinder
EZ = Electric cylinder

Frame size/joining force in kN: _____

Throat depth: _____

140 = 140 mm (140, 200, 300)

Stroke: _____

100 = 100 mm (100, 200)

Process:

F = Joining
S = Punching
P = Stamping; with supplementary identification

PTH 6 - 4


Type height
Digits
Type holder
Stamping process

P U 6 - 5 A3


A incl. 3 automatically-incrementing positions
M = manual adjustment
No. of digits (5)
Type height in mm
Stamping mechanism
u = Bottom, mounted on the jaw
o = Top, mounted on the cylinder side
Stamping process

Position sensing:


T00: None
T02: 24 V inductive position sensing, 2 outputs
T10: Pneumatic sensing
T12: 24 V inductive position sensing, 1 output

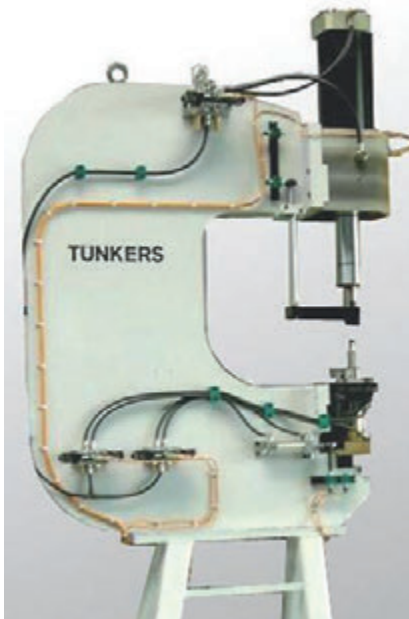

C-frame mounted to pedestal for stationary applications with customer specific base frame

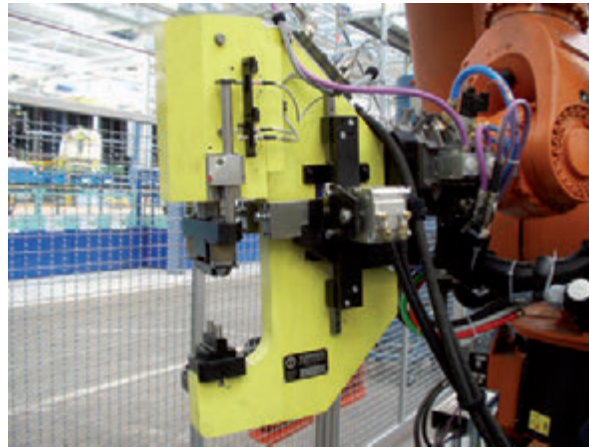

Adapter plate flanged to the back or base for connection to automation robots or quick-change systems

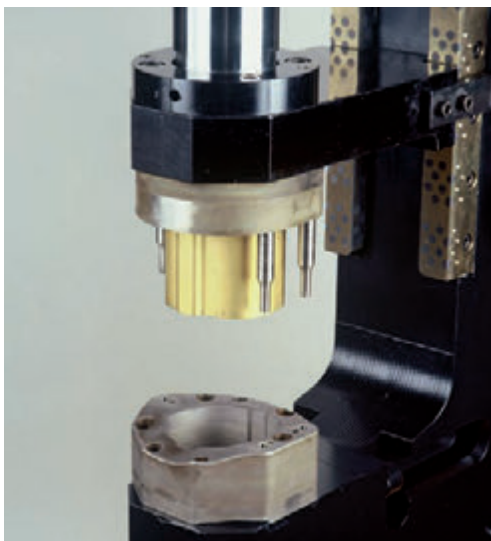

The installation of an additional external guide and anti-rotating device is recommended with extreme stroke lengths and the use of multiple tools. This can be realised in the form of a linear guide on the inside of the C-frame, or an external column guide.



Horizontal or vertical clamp adjustment, ensures that process forces cannot affect the workpiece directly during forming and cause deformation. Alternatively spring-loaded or pneumatically controlled.

Overview of Performance Data



Type	Drive	Force (kN)	Stroke (mm)	Throat depth (mm)
CBMZ 10	Multi-force	10	50-200	50-600
CBMZ 25	Multi-force	25	50-200	50-600
CBMZ 45	Multi-force	45	50-200	50-600
CBMZ 60	Multi-force	60	50-200	50-600
CBHA 60	HydroAir	60	50-200	50-600
CBHA 110	HydroAir	110	50-200	50-600
CBHZ 50	Hydraulic	50	50-200	50-600
CBHZ 80	Hydraulic	80	50-200	50-600
CBHZ 150	Hydraulic	150	50-200	50-600
CBHZ 300	Hydraulic	300	50-200	50-60
CBEZ 60	Electric	60	50-200	50-600
CBEZ 80	Electric	80	50-200	50-600
CBEZ 150	Electric	150	50-200	50-600
CBEZ 250	Electric	250	50-200	50-600




FORMING



Power Press Unit

Compact forming clamp generating high press forces of up to 75 kN (7.5 tons) via a toggle mechanism integrated into the tool housing. The force intensified at a ratio of approx. 1:7, is applied in end position. Therefore, standard pneumatic cylinders with 5 bar operating pressure are sufficient as drives.


Contrary to the C-frame system, the forming force is applied to the workpiece via a pivoted swivel arm.

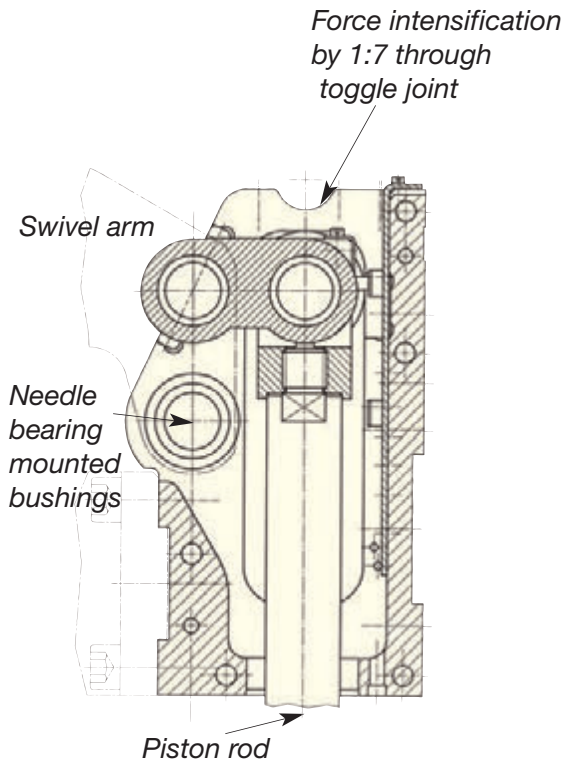


The stamp is guided by the swivel arm and practically rotates into the die – without any quality or tool life losses – as proven by more than 1,000 automotive applications.

Special advantage:


The swivel arm opens fully and completely releases the component for horizontal removal. There is no need for installation of an additional linear unit, as is the case with standard C-frame systems.

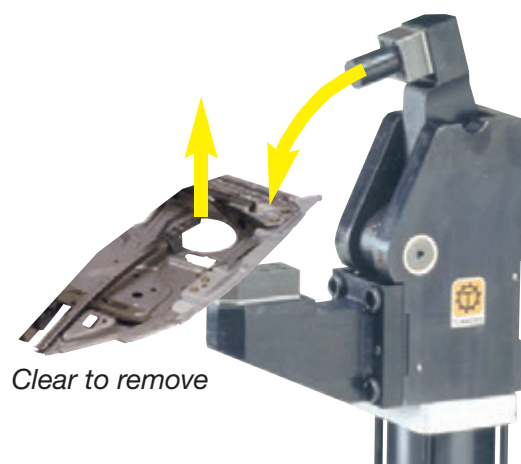

Toggle unit structure

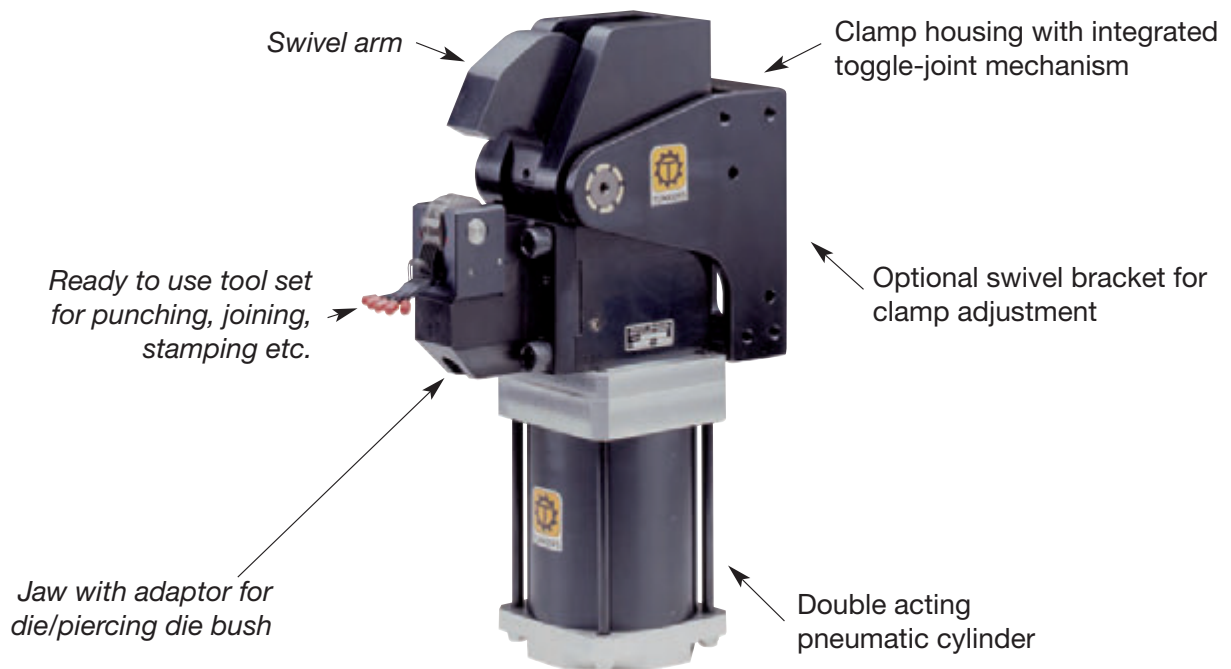

Application examples

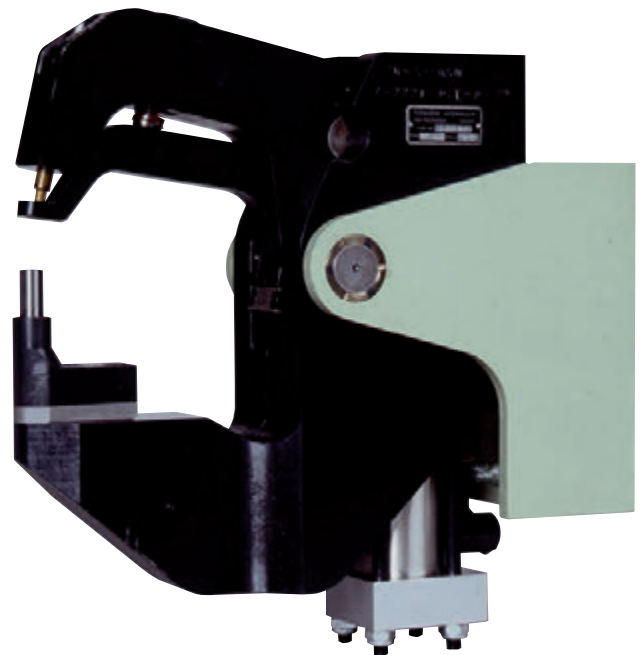


Product range overview

Type	Drive*	Force at 60 mm throat depth (KN)	max. opening angle (mm)	Throat depth (mm)
PFS 100	Pneumatic	10	75°	60-200
PFS 200	Pneumatic	40	75°	60-200
PFS 400	Pneumatic	50	75°	60-200
PFS 900	Pneumatic	75	75°	60-250

*All our toggle-joint clamps are optionally available with hydraulic cylinder of the HFS series

-
- PFS...
- max 75°
- Throat depth
- B1 B2 B3
- B11
- B5
- B4
- B8
- D2
- L1
- L2
- L3
- L4
- L5
- L6
- L7
- B10
- D1
- B4
- B6
- B7*
- B9
- Maximum opening angle
PFS 100 - 900 = 75°
PFS 2200 = 60°

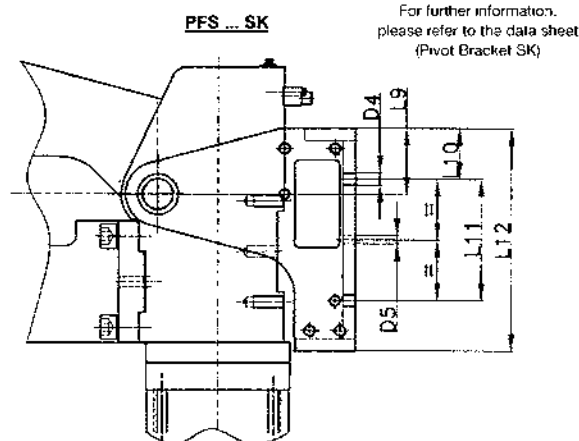

PFS 400 60 SK F T12

└─ Sensing system
└─ Model for joining operations
└─ with swivel bracket
└─ Throat depth (standard size)
└─ Size
└─ Type

Order code
...T12 24 V
1 out
...T08 Pneu

Order code TÜNKERS position sensing systems:
 ...T12 24 V inductive position sensing,
 1 output 3 LED's
 ...T08 Pneumatic sensing system


Type	Compression force (kN) Throat depth (mm)			Torque (Nm)	B1	B2	B3	B4 □	B5	B6	B7*	B8	B9 min	B10 min	D1	D2 H7	D3	D4	D5 H7	L1 max.	L2	L3
	60	90	120																			
PFS 100	10	6	3,5	600	30	40	68	94	9	62	40	70	32	25	80	10	M10	M10	8	418	40	35
PFS 200	21	12,8	7	2000	25	50	70	145	7,5	72	52	75	32	35	125	10	M10	M10	8	433	125	25
PFS 400	35	22,8	13,3	4000	40	60	65	145	6	100	80	78	40	35	125	10	M12	M12	8	504	105	50
PFS 900	80	51,5	30	9000	40	60	65	145	6	100	80	78	40	35	125	10	M12	M12	8	671	105	50

Type	L4	L5	L6	L7	L8	L9	L10	L11 +0.2	L12
PFS 100	80	228	165	95	15	71	20	150	190
PFS 200	100	225	142	110	15	66	51	125	233
PFS 400	80	272	147	120	18	65	50	120	220
PFS 900	80	272	147	120	18	65	50	120	220

4 - 64 |



for PFS/HFS toggle unit

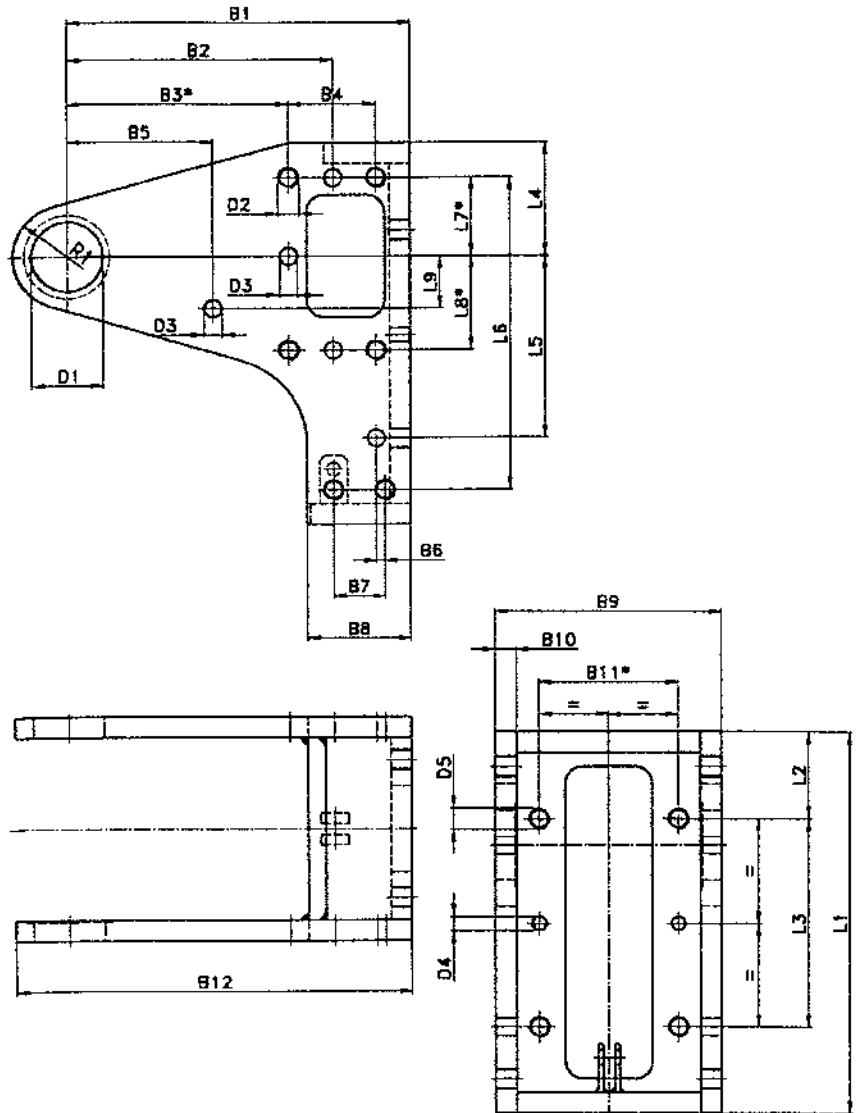

FORMING

Ordering example:

SK 400

Toggle unit type

Bracket type

*Tolerance for pin bores ± 0.02 , for threaded holes ± 0.1


Type	B1	B2 ± 0.02	B3*	B4 ± 0.2	B5 ± 0.02	B6	B7 ± 0.2	B8	B9	B10	B11*	D12	D1 H7	D2	D3 H7	D4 H7	D5	L1	L2	L3	L4	L5 ± 0.02	L6 ± 0.2
SK 100	178	-	-	-	-	-	-	62	86	10	50	203	30	-	-	8	M10	190	20	150	71	-	-
SK 200	182	147	127	40	85	-	-	52	96	10	60	210	35	M10	10	8	M10	233	51	125	66	-	-
SK 400	195	-	125	50	-	5	30	60	130	12	80	225	40	M12	10	8	M12	220	50	120	65	105	180
SK 900	195	-	125	50	-	5	30	60	130	12	80	225	40	M12	10	8	M12	220	50	120	65	105	180

Type	L7*	L8*	L9 ± 0.02	R1
SK 100	-	-	-	25
SK 200	36	54	21	28
SK 400	45	-	-	30
SK 900	45	-	-	30


Subject to technical modifications.

Our power press units are individually adjusted to every case of application. Therefore, the technical dimensioned drawings serve as guidelines for your pre-design.

Punching

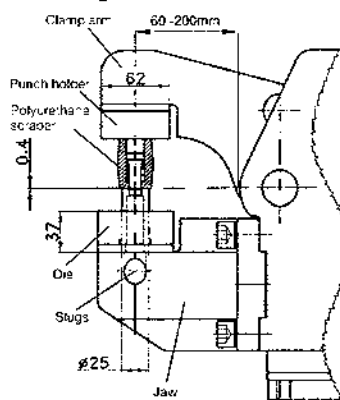


Joining

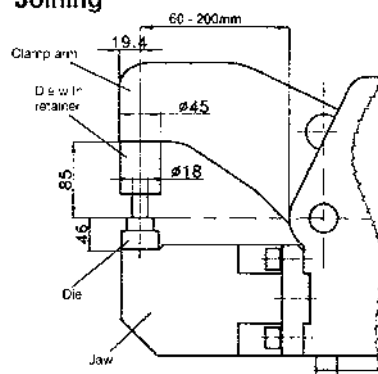


Marking

Die plates mounted to jaw

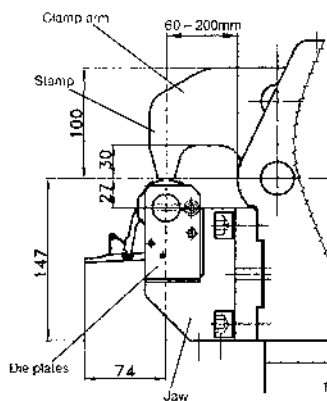


Marking

Die plates mounted to clamp arm

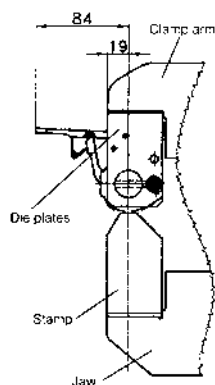

Marking

with type holder

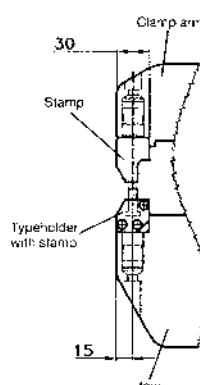

Subject to technical modifications.



PFS 400 60 P TH8-6 70° T12

TYPE: _____

Sizes: _____
100
200
400
900

Throat: _____
60-200 mm

Process / Application: _____
F = Joining
S = Piercing
P = Stamping

PTH 8 - 6
Character height in mm
Digits
Typeholders
Stamping process

P U 6 - 5 A3
3 digits automatically changing
M = manual adjustment
Digits (5)
Character height in mm
Stamping mechanism
u = Bottom / mounted on the jaw
o = Top / mounted on the arm
Stamping process

Opening angle: _____

Query: _____
T00: without
T08: Pneumatic control
T12: Inductive sensor 24 V, 1 output

FORMING

FORMING

Fixtures



Turnkey solutions

As a mechanical engineering company based in Ratingen near Düsseldorf, we have the know-how and capacities to produce customer-specific tools and clamps, including turnkey solutions.

The following applications will provide you with a relevant overview. We would also be happy to supply your application in the form of a stand-alone system.


Fixture construction infrastructure

We have all the capacities required for the production of small-size fixtures available at our main plant:

- CAD construction
- Project planning
- Contour block production
- Assembly
- Electric and pneumatic installation
- Measurement technology




Application examples

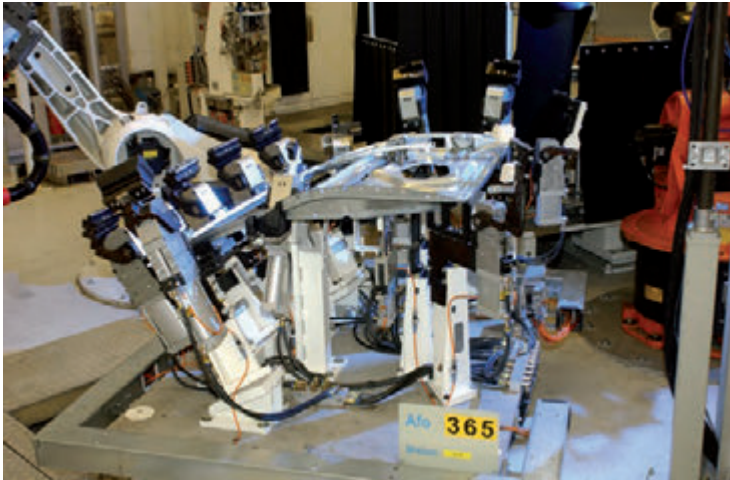

Fixture for press forming of dimples /beading with pneumatic power press clamps into door body sheet. Preparatory working step to ensure a degassing slot for laser-welding.

Combination fixture for right/left door for punching operations on the reinforcing sheet

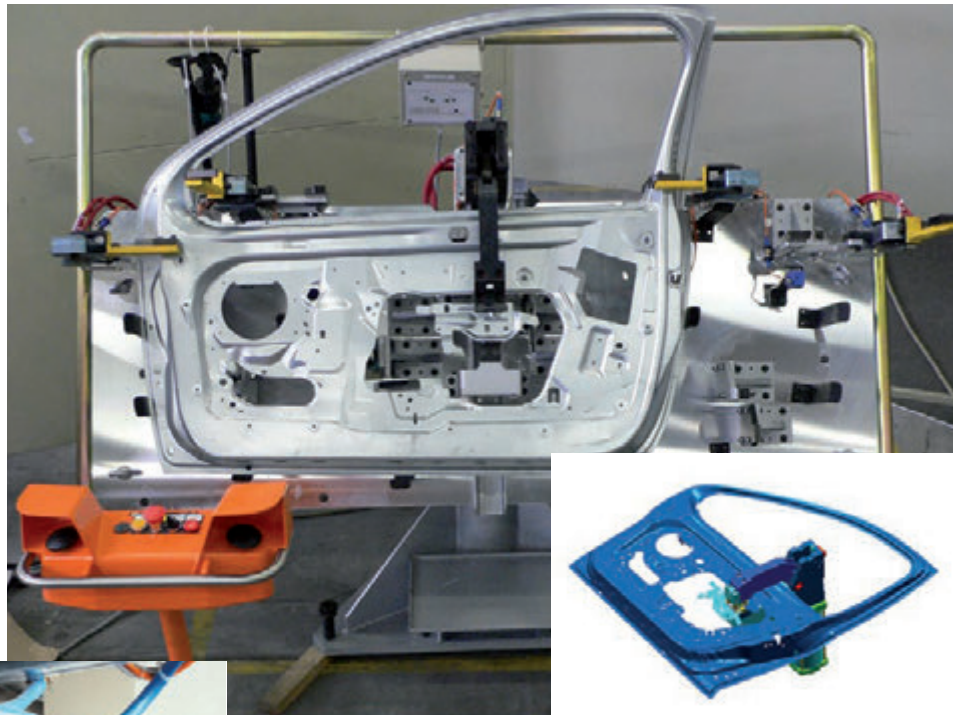


FORMING



Clinching fixture for base plate of an exhaust manifold



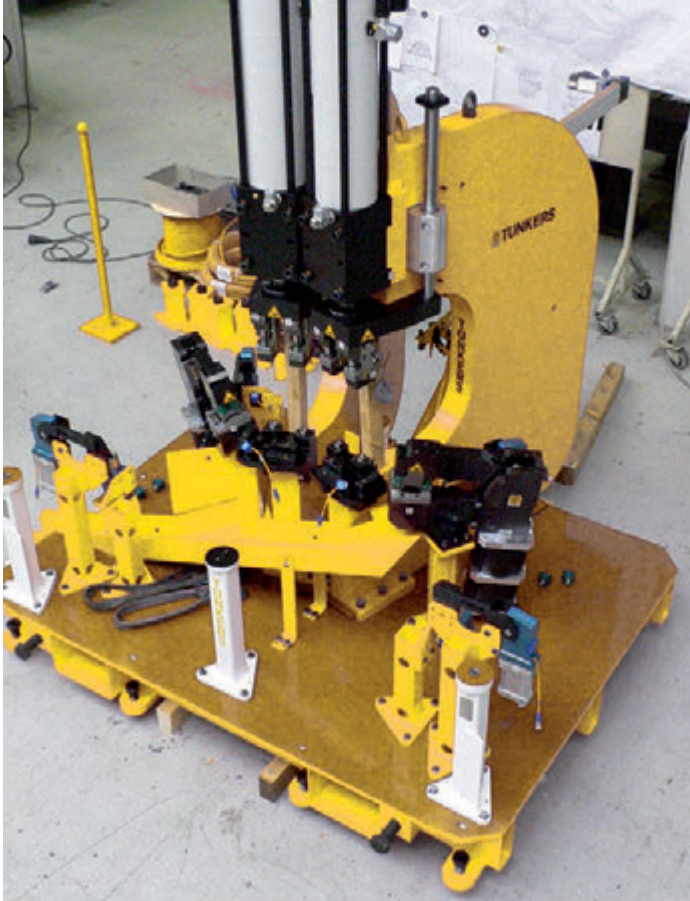

Fixture for bolt punching and cutting of the component "door"




4 die heads for punch bolts



Power press unit for cutting of the component





Linear unit for positioning of parts in the fixture

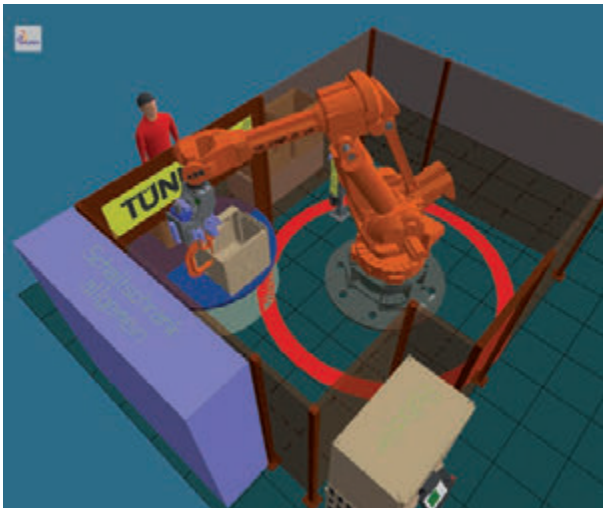


Robot cell for spot welding operations on stainless steel tank

Small press for the production of small sheet parts with multi-stage tool directly from a coil

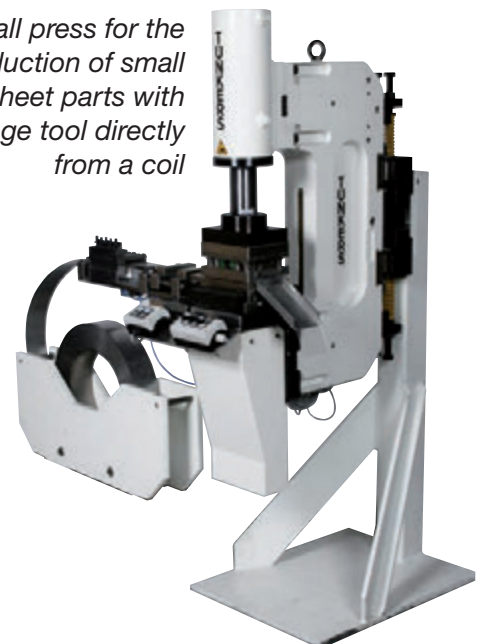



Wheelhouse crimping

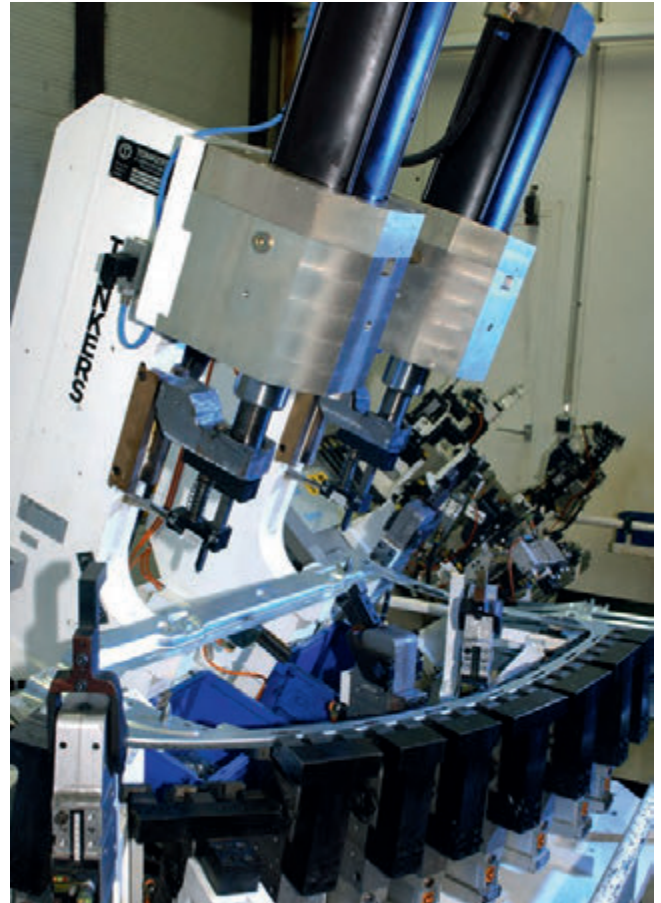

Set device for knobs embossing and nuts piercing



Manual workplace for tube piercing



4x tailgate piercing

WELDING




Weld Clamps



5-6

Robot Weld Guns



5-10

Manual Weld Guns




5-14

Special Weld Guns



5-16

Weld Machines



5-17

Press-Welder Fixtures



5-18



Welding

Welding is the most frequently used process for joining components in sheet metal fabrication. By far the largest application for welding is in car body manufacture. Typical applications include the permanent joining of inner and outer skin panels or securing joining elements such as weld nuts.

High precision and repeatability are also requirements for modern welding technology, as are long service life and speed. Decisive factors in obtaining the best results are the correct intensity, the duration and the optimum pressure during the welding process. For this reason, a high-performance power source is essential. In order to satisfy these requirements, TÜNKERS and HELU have developed a wide range of products. The TÜNKERS and HELU portfolio of welding technology ranges from weld clamps to manual weld guns to lightweight modular weld guns.


Weld clamps

The weld clamp is the smallest element in the series of welding tools and it has been specially designed to satisfy the requirements of high-volume production in sheet metal fabrication. The core element of the weld clamp is a double-acting pneumatic cylinder made of high-strength aluminum. The electrode arm is moved by means of the knee-lever principle. TÜNKERS weld clamps are compact units and are characterised by their small size and high welding force in the end position, where the full knee-lever transmission has its effect.



Resistance weld guns

In automation technology, robot weld guns are mostly used: these are indexed toward the component, where the components are joined together. The robot weld gun features a modular construction. A core element of the gun is the power source. For rapid and smooth attachment-type welding processes, servo technology is applied, in the form of servo-pneumatic or servo-electric motive power.

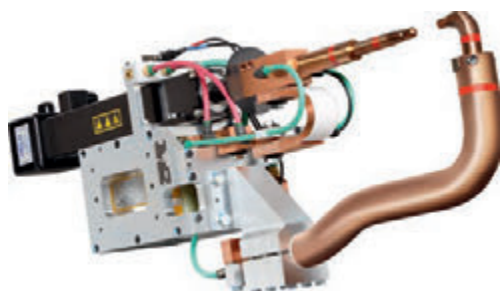

OEM weld guns

OEM weld guns represent a special group of robot weld guns. The individual modules, including the basic gun and the gun mounting bracket, are designed and manufactured to the relevant company standards. This results in the maximum possible uniformity and high levels of reliability.

Manual weld guns

Manual weld guns are taken to the component by the operator and then positioned. Even relatively inaccessible positions can be reached in this way. A decisive factor for satisfactory handling is low weight and an optimally located centre of gravity.

Weld machines

Weld machines are stationary installations. Components are either manually or automatically fed into them. Cylinders move the electrodes to the component under either pneumatic or electrical power. During the joining process, material differences can be compensated by adjusting the drive unit to the optimum setting. A special form is the C-frame welding unit, which incorporates a stable and compact C-frame.

In addition to spot welding, resistance projection welding is a related type of welding process.

Technical calculation principles

The welding force is proportional to the throat clearance and to the operating pressure

- As the throat clearance (L) increases, the weld load declines
- As the operating pressure (P) increases, the weld load increases


The weld load formula:

$$F = \frac{P}{6} \cdot \frac{M_b}{L}$$

P = Operating pressure
(0-6 bar)


M_b = Weld gun torque (Nm)

L = Throat clearance (m)

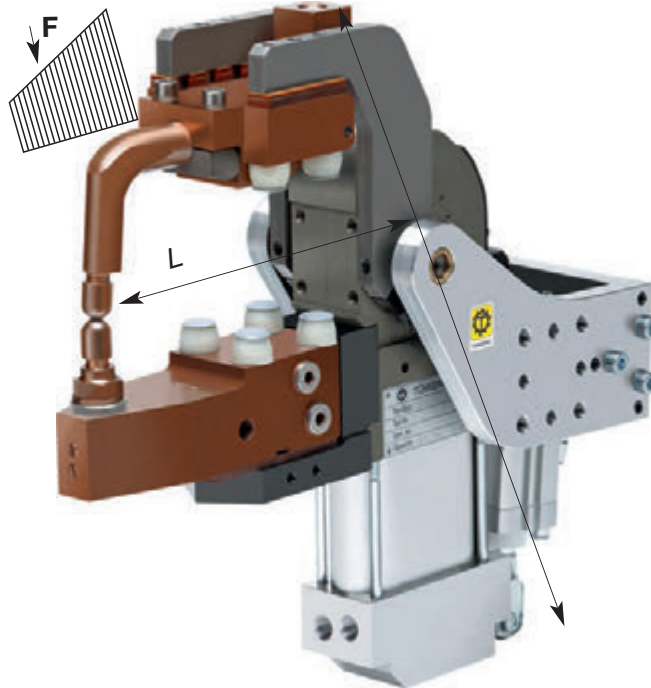

Example: weld load as a function of throat clearance


(Guideline values for design purposes)

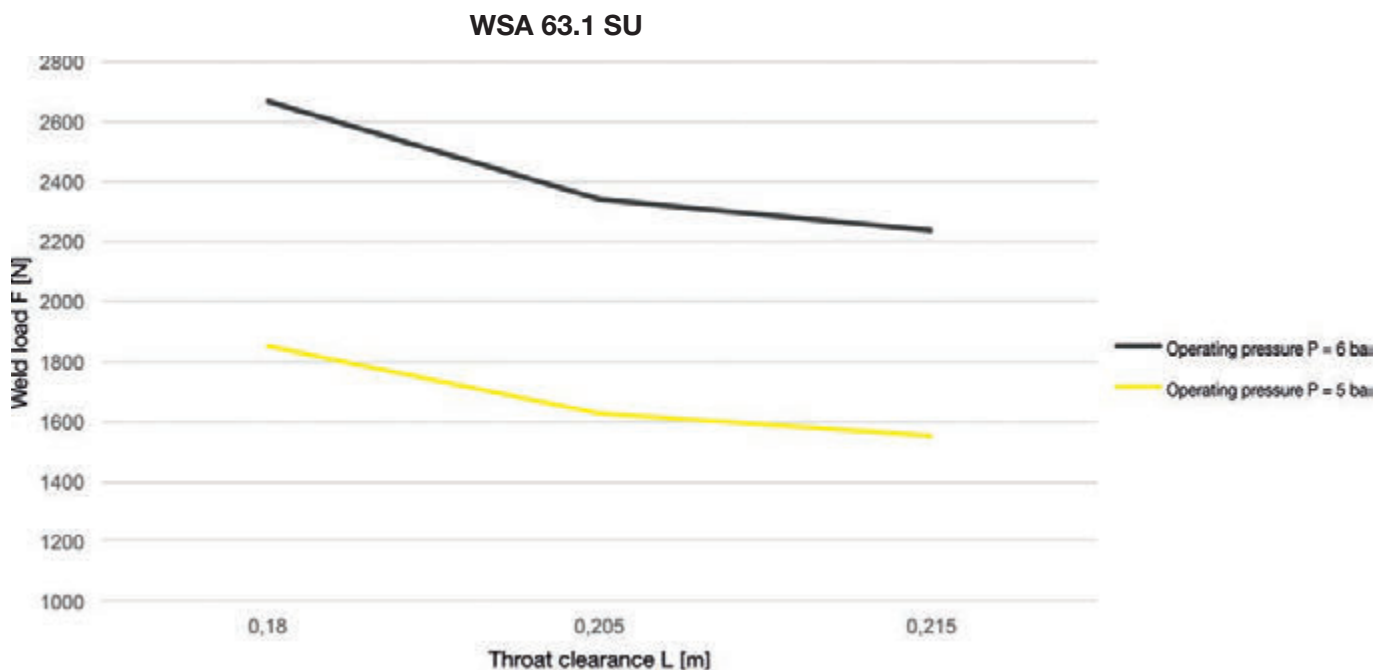

The weld clamp is a tooling system that has been specially designed to satisfy the requirements of high-volume production in sheet metal fabrication. As part of the installation, the weld clamp, in combination with a pneumatic control unit, can be expanded to form a fully functional system.

The weld clamp comprises the following subassemblies:

1. Double-acting pneumatic cylinder with integral knee-lever mechanism and position sensing system
2. Pneumatically-controlled pivot bracket or linear unit, used for tolerance equalising (electrode burn-up/ component tolerance), simplified component changeover and, at the same time, mounting to the fixture
3. Insulated pivot arm with electrode holder and electrode
4. Insulated jaw/bracket with electrode holder and electrode

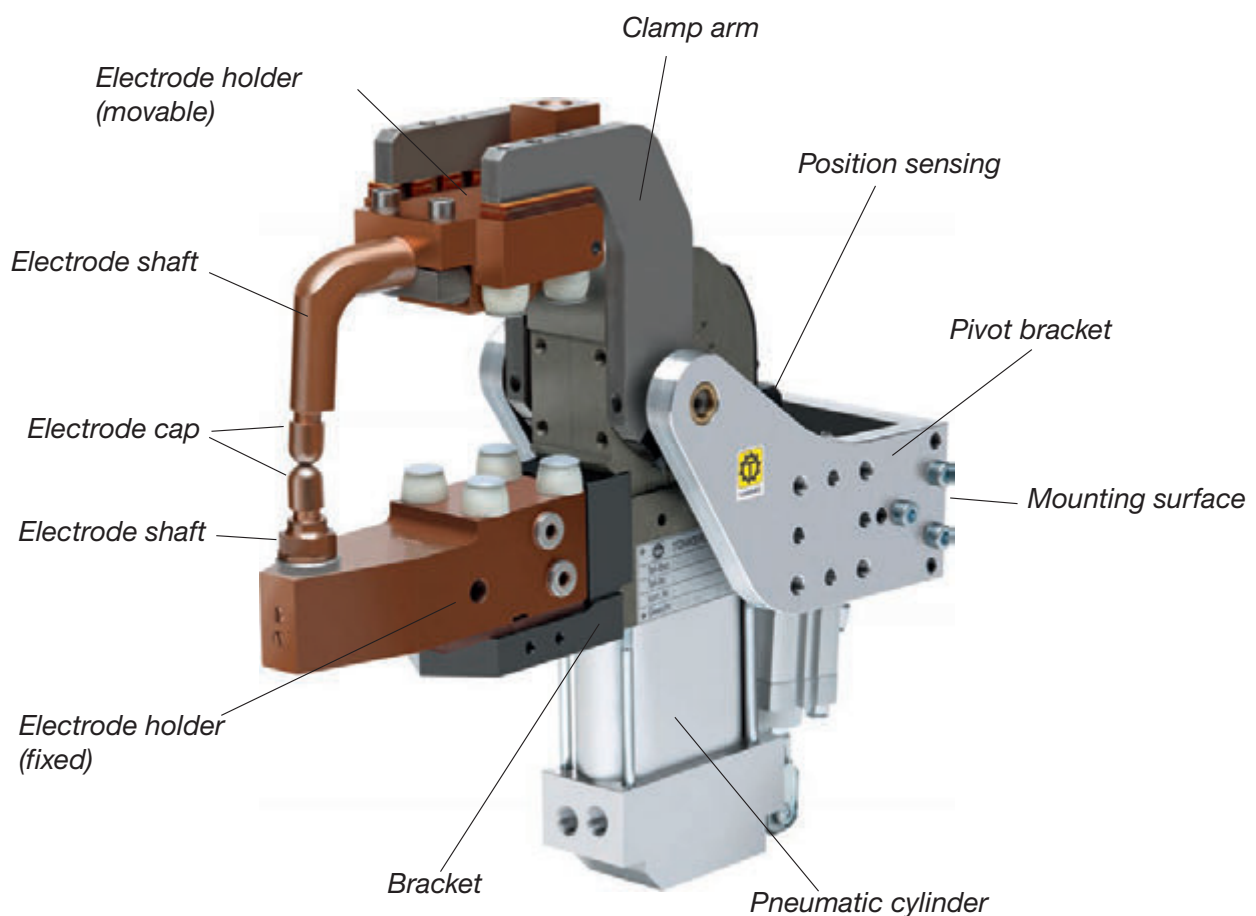

Method of operation:

Pressure, generated by the pneumatic cylinder, activates a knee-lever mechanism incorporated into the cylinder housing and this powers the pivot arm. A high degree of force is transmitted in the end position of the mechanism, thus generating the clamping force required for welding. The return stroke is initiated by pressure in the piston ring side of the cylinder. The position is controlled by integral sensors.


The integral pivot equaliser ensures that, when a component is changed, there is no collision between the electrodes and the component.

In addition, the equaliser produces a consistent, reproducible process force in the welding area.




Weld clamp base unit with universal pivot bracket

- Weld clamp base unit consisting of one APH 63.1 BR3 subassembly and one SU63 universal pivot bracket
- Client-specific electrodes and electrode holders
- Available as options:
 - Electrode holder (standardised)
 - Electrodes (standardised)
 - Mountings (standardised)

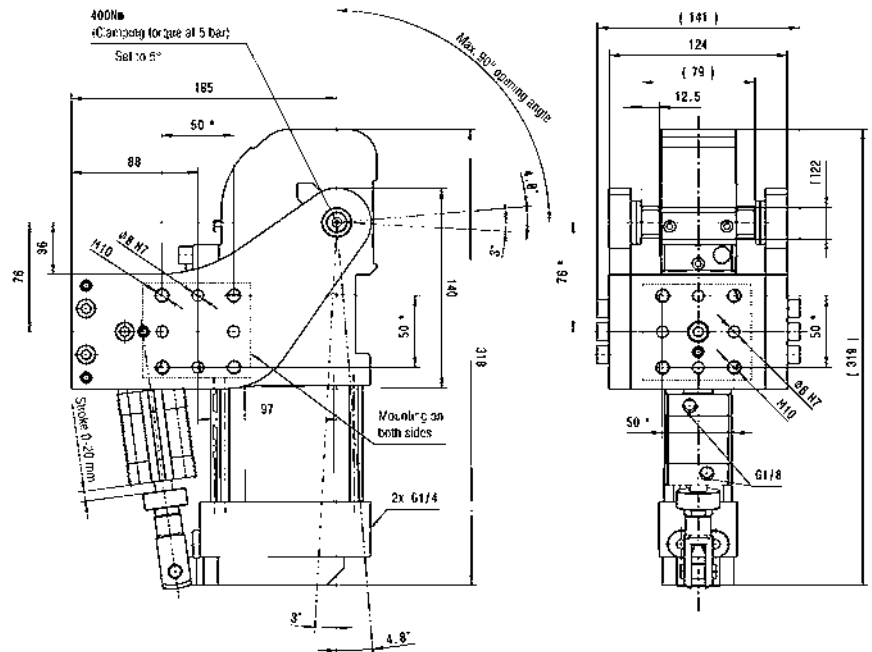

Weld load as a function of throat clearance

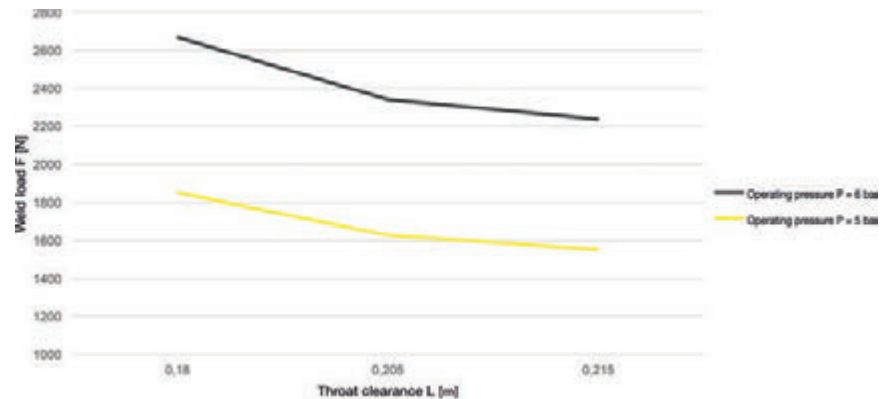

Ordering example:

WSA 63.1 A180 T12 45° SU 5° 423051

```

graph LR
    Type --> Piston_dia[Piston dia., Version]
    Type --> Electrode_throat[Electrode throat clearance]
    Type --> Position_sensing[Position sensing system]
    Type --> Opening_angle[Opening angle]
    Type --> Type_pivot[Type of pivot bracket mounting]
    Type --> Bracket_pivot[Bracket pivot angle]
    Type --> TUNKERS[TÜNKERS Article Number]
  
```



Order code TÜNKERS position sensing systems:

...T12 24 V inductive position sensing,
1 output with integral LEDs

Technical Data:

Clamping torque:	at 5 bar $M_b = 400 \text{ Nm}$
Operating pressure:	max. 6 bar
Medium:	Compressed air, can be operated with oil-free air
Clamp opening angle:	max. 90°
Readjustment angle:	max. 5°
Pivot equalising angle:	max. 7°
Connection to basic clamp:	G1/4"
Weight:	approx. 20 kg varies according to version



Subject to technical modifications.

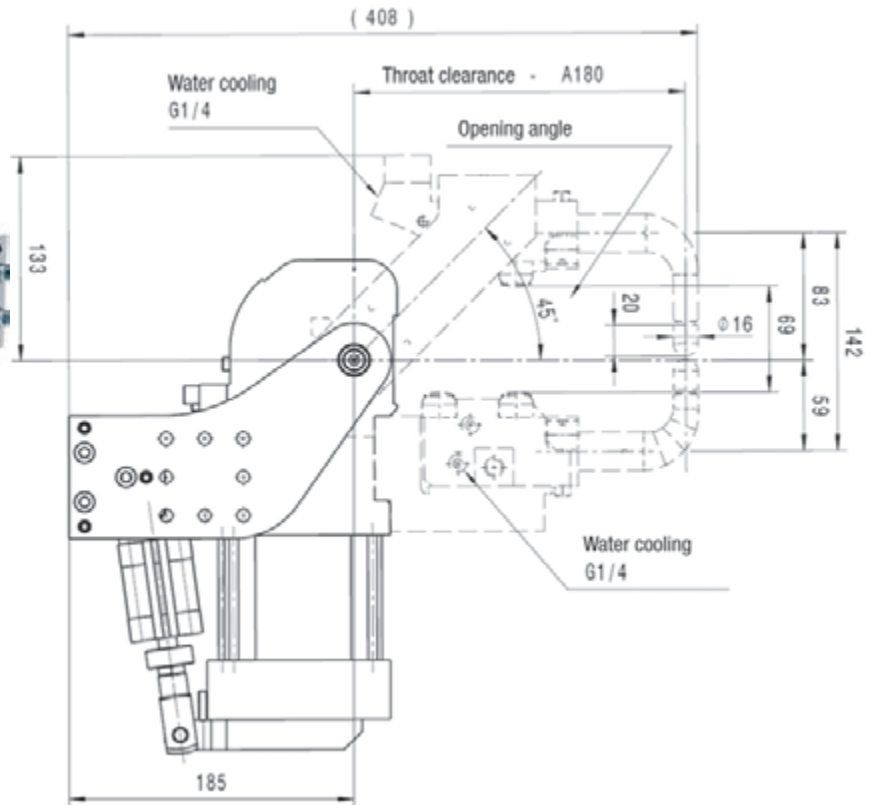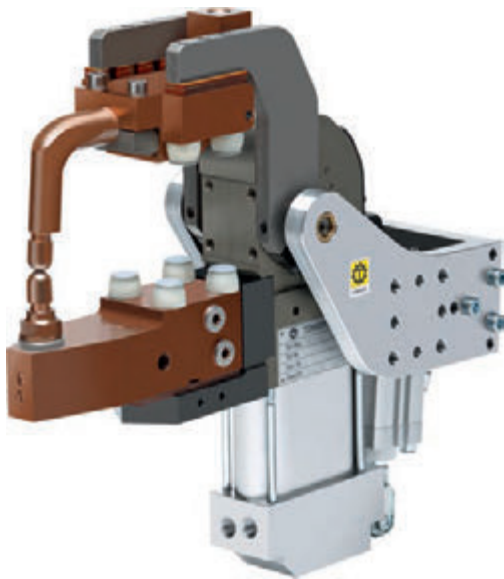

Weld clamp with universal pivot bracket

- Weld clamp base unit consisting of one APH 63.1 BR3 subassembly and one SU63 universal pivot bracket
- Client-specific electrodes and electrode holders
- Available as options:
 - Electrode holder (standardised)
 - Electrodes (standardised)
 - Mountings (standardised)




Weld load as a function of throat clearance

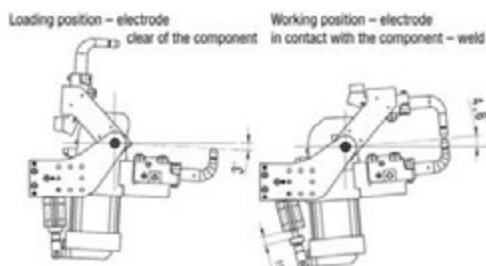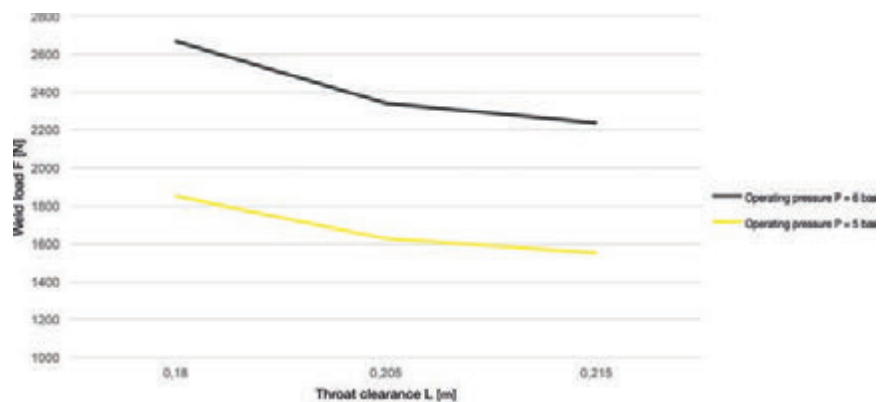

Technical Data:

Medium:	Compressed air, can be operated with oil-free air
Operating pressure:	max. 6 bar
Clamping torque:	at 5 bar M_b = approx. 400 Nm
Clamping/Weld load:	at 5 bar F = approx. 1,8 kN; at 6 bar F = approx. 2,1 kN
Clamp opening angle:	45°
Setting angle, pivot equaliser:	+3°
Water cooling:	cooled
Rate of flow:	4 l/min
Cap version:	F16x20 (Tünkers works standard)
Electrode shaft version:	D28 (Tünkers works standard)
Connection to basic clamp:	G1/4"
Pivot bracket connection:	G1/8"
Power supply connection:	M12
Weight:	approx. 3 kg, varies according to version

Subject to technical modifications.

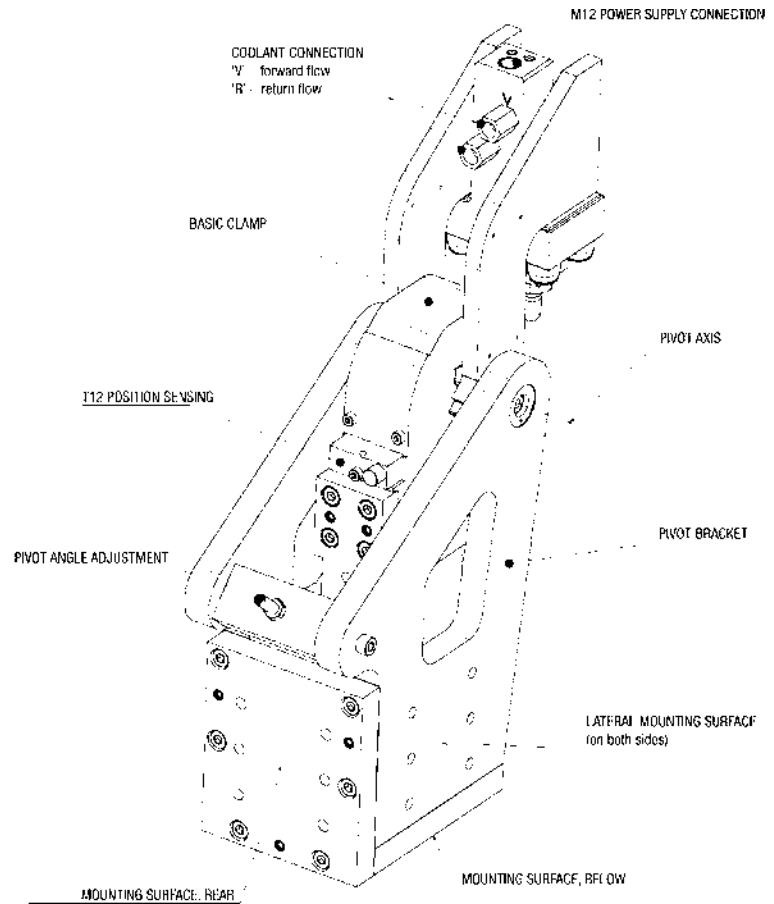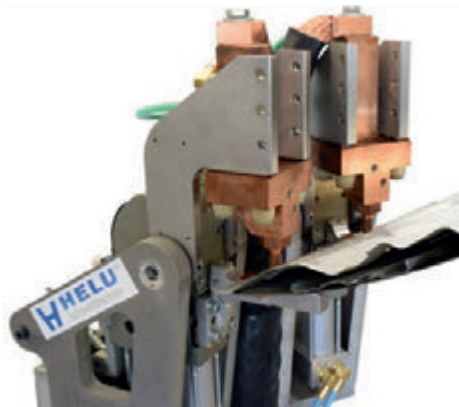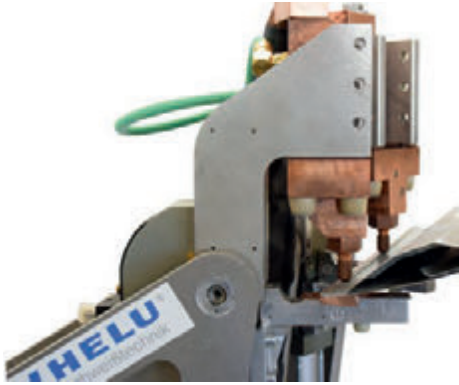

Resistance tack weld clamp

- For use in pairs for volume production welding operations
- For welding in bonding applications in body framework construction
- Due to the use of 10 kHz technology, welding operations are possible in viewpoint quality
- Welding directly on the folding bed is possible

Ordering example:

RTW 63.1 A100 T12 75° 423051

↳ Type
 ↳ Piston dia., Version
 ↳ Electrode throat clearance
 ↳ Position sensing system
 ↳ Opening angle
 ↳ TÜNKERS Article Number

Order code TÜNKERS position sensing systems:

...T12 24 V inductive position sensing, 1 output with integral LEDs

Technical Data:


Clamping torque:	at 5 bar $M_b = 400 \text{ Nm}$
Clamping/Weld load:	at 5 bar $F = \text{approx. } 3 \text{ kN}$ at 3 bar $F = \text{approx. } 1,2 \text{ kN}$
Clamp opening angle:	75° (at A100 approx. 8 mm)
Pivot equalising angle:	$\pm 5^\circ$
Weight:	approx. 25 kg varies according to version

Subject to technical modifications.




HELU Robot Weld Gun – C-Type

- Pneumatic or servo-electric
- AC or MF-DC transformers
- Pneumatic clamp equalisation
- Aluminum or copper fittings

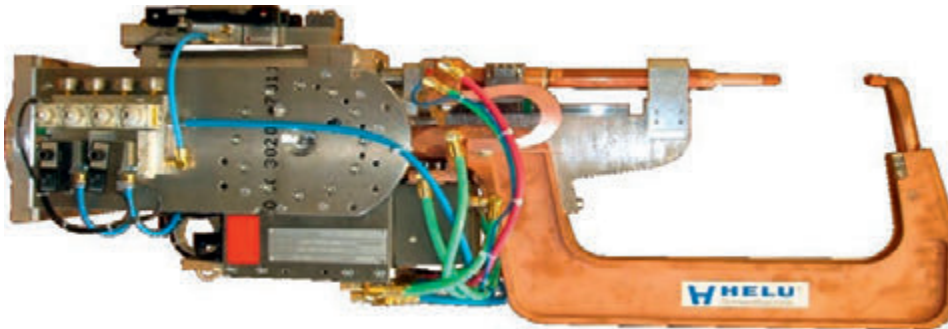



Technical Data

- Arm mounting: dia. 45 mm or dia. 50 mm
- Throat clearance: max. 650 mm
- Width: max. 500 mm
(larger clamping aperture [throat clearance x width] on request)
- Pitch, 40 mm dia. electrode arm: 75 mm
- Pitch, 50 mm dia. electrode arm: 90 mm
- Type of power source: Pneumatic
Servo-pneumatic (max. operating pressure 10 bar)
Servo-electric
- 50 mm dia. equaliser: max. 20 mm programming distance
- Transformer in safety cage

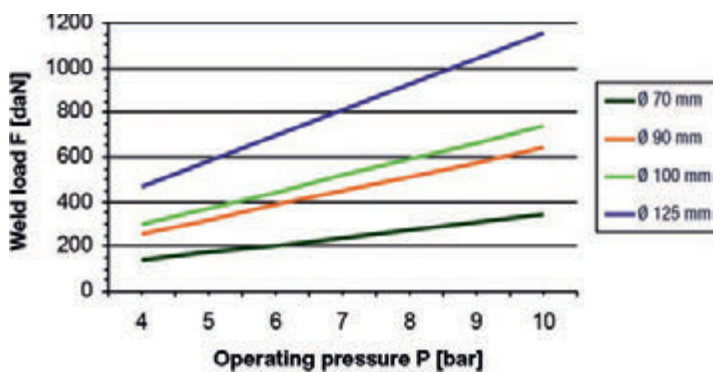


- Pneumatic or servo-electric
- AC or MF-DC transformers

- Pneumatic clamp equalisation
- Aluminum or copper fittings

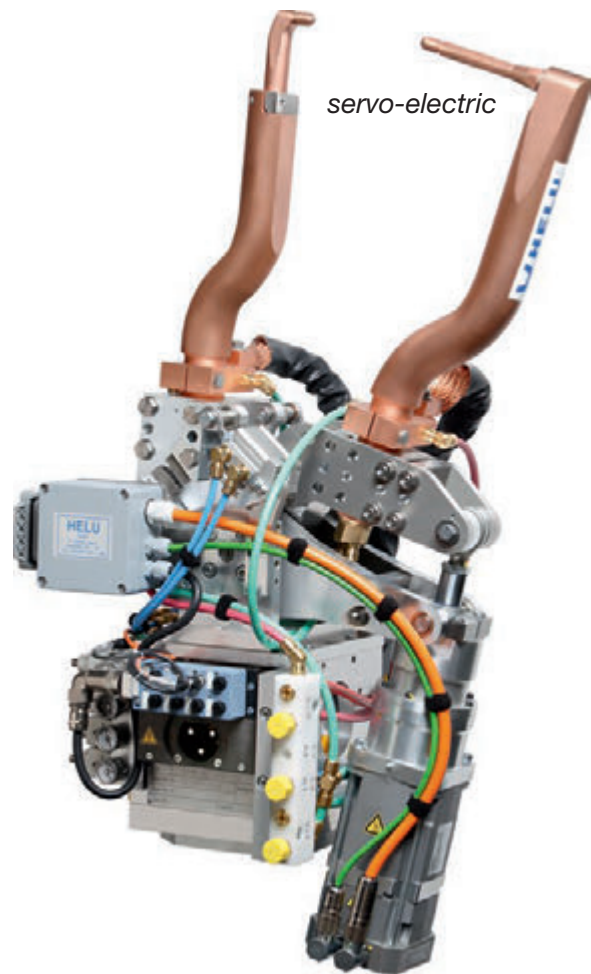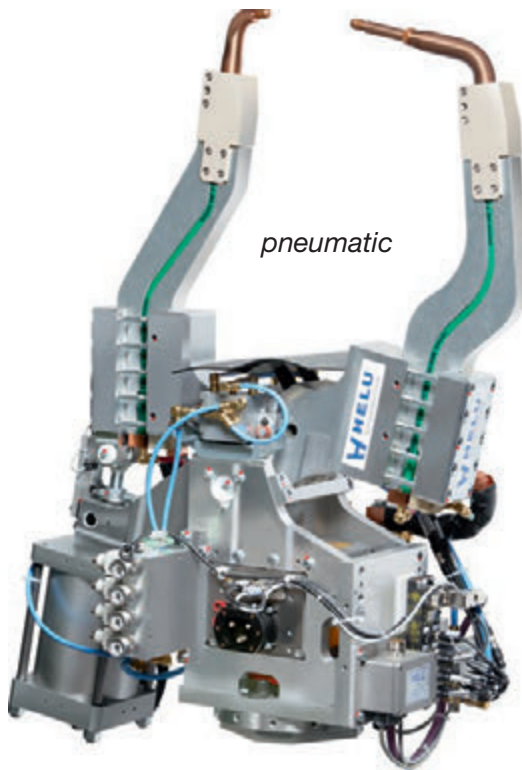

Technical Data

- Arm mounting: 40 mm dia. to 60 mm dia.
40 mm x 90/100 mm, 50 mm x 100/120 mm
- Throat clearance: max. 950 mm
- Clear width, above: 100 mm to 220 mm
- Clear width, below: 100 mm to 370 mm
- Type of power source: Pneumatic (max. operating pressure 10 bar)
- Equaliser: 2 x 50 mm dia., can be rotated 180°
- Servo-motor: $F_{\max} = 150 \text{ daN}$
Stroke 150 mm
- Transformer can be mounted transversely or upright
- Secondary connection, left or right

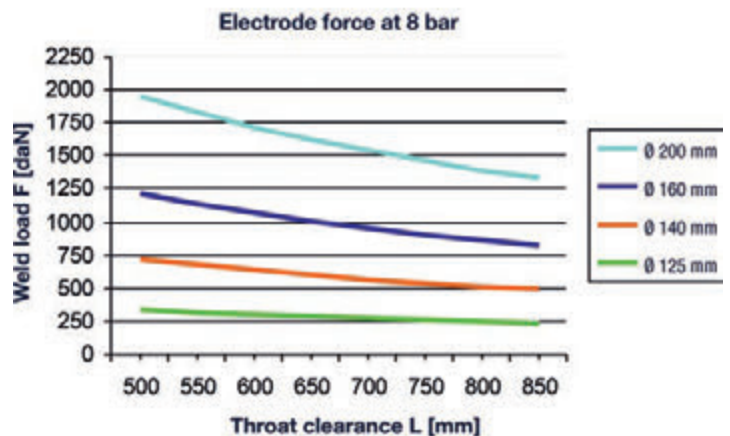




OEM-Standard Weld Guns


- Compatible with OEM standard
- X- or C-Type

- ISO or medium-frequency transformer
- Servo-electric, pneumatic or servo-pneumatic

VW

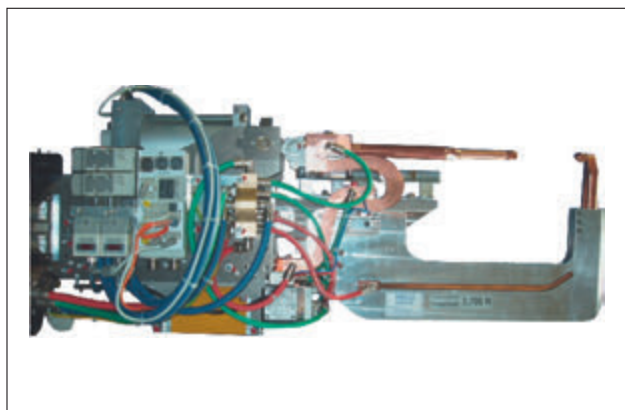

C 8000

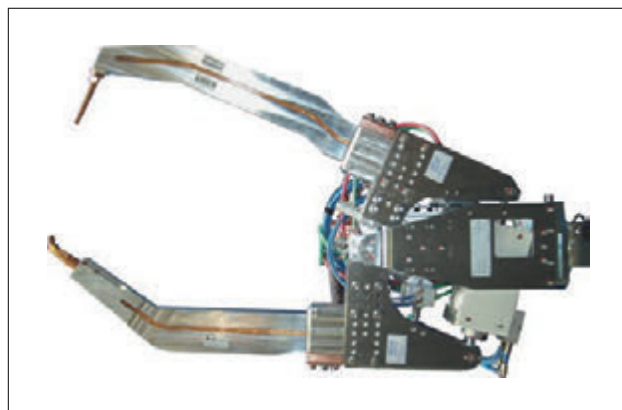


X 100

Opel




Global Gun Generation 3 (X-Type)

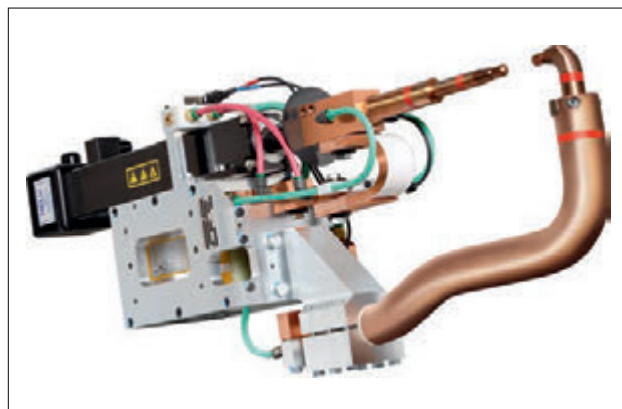


Global Gun Generation 3 (C-Type)

Daimler

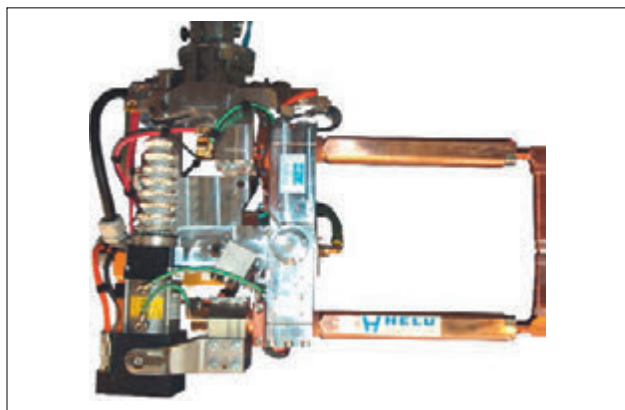


X 50

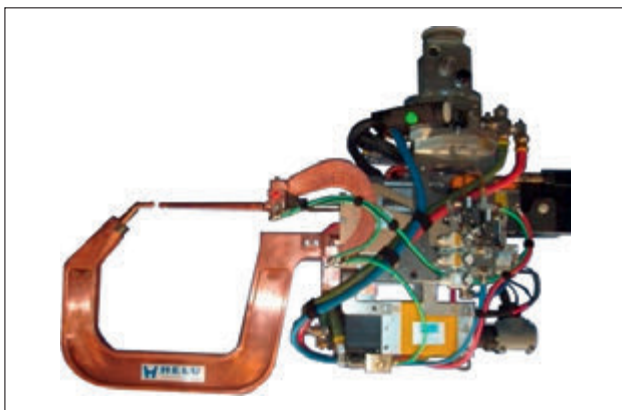

C 45

- Pneumatic or servo-electric
- MF-DC transformer
- Aluminum or copper fittings



- C- or X-Type
- Robot or manual gun

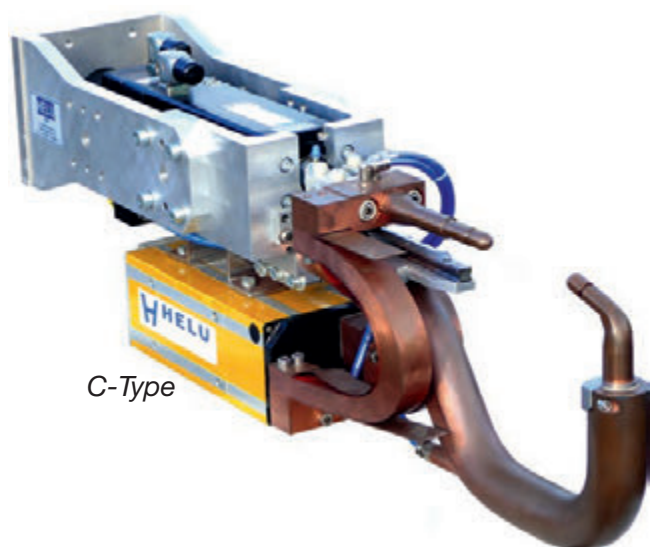

C-Type



X-Type

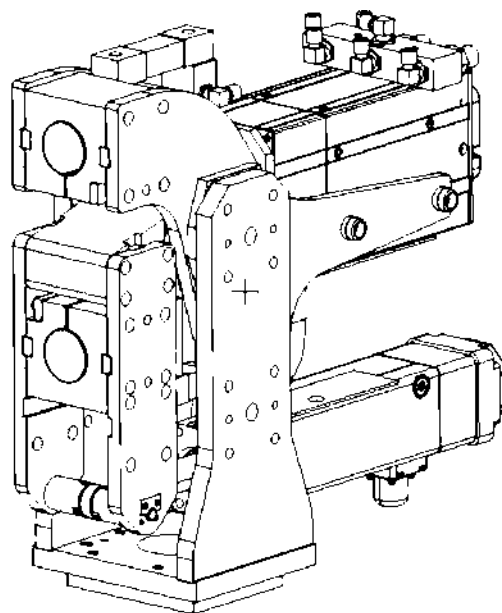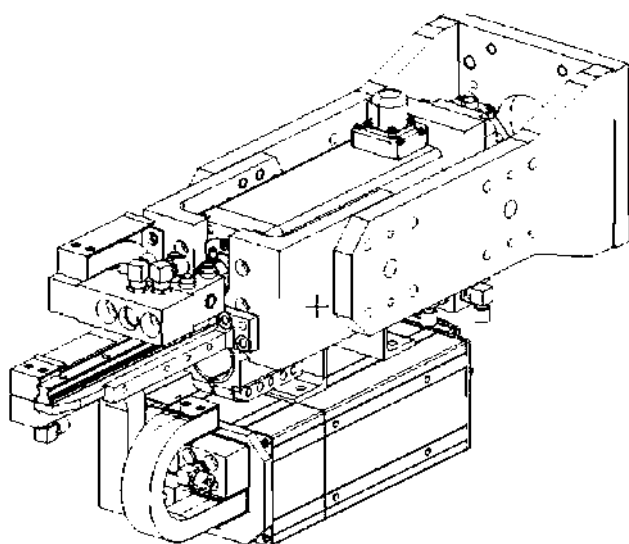

Technical Data

- $F_{\max}$: 5000 N
- Arm fitting: D45
- Pitch: 75 mm
- Servo-motor: GSWA33-N05
- Transformer: MF100
- Weight excl. fitting: approx. 50 kg


Technical Data

- L = 250 mm / aperture: approx. 86 mm / $F_{\max}$ = 5,000 N
- L = 300 mm / aperture: approx. 103 mm / $F_{\max}$ = 5,000 N
- L = 350 mm / aperture: approx. 120 mm / $F_{\max}$ = 5,000 N
- L = 400 mm / aperture: approx. 137 mm / $F_{\max}$ = 5,000 N
- L = 450 mm / aperture: approx. 154 mm / $F_{\max}$ = 5,000 N
- L = 500 mm / aperture: approx. 171 mm / $F_{\max}$ = 4,500 N
- Arm fitting: D50
- Pitch: 100/100 mm; 100/160 mm
- Servo-motor: GSWA33-N04
- Transformer: MF100
- Weight excl. fitting: approx. 58 kg




Manual Weld Guns – C-Type



- Pneumatic
- AC or MF-DC transformers
- Aluminum or copper fittings
- Optional HD (heavy-duty) version

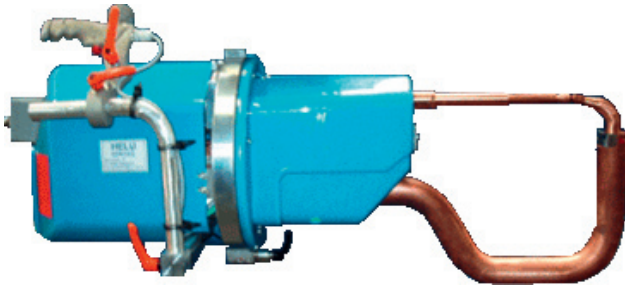

Standard transformer manual weld guns

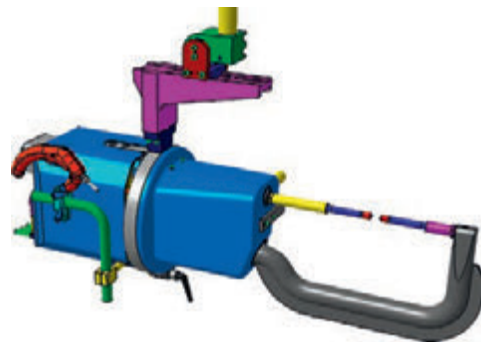


HD transformer weld guns

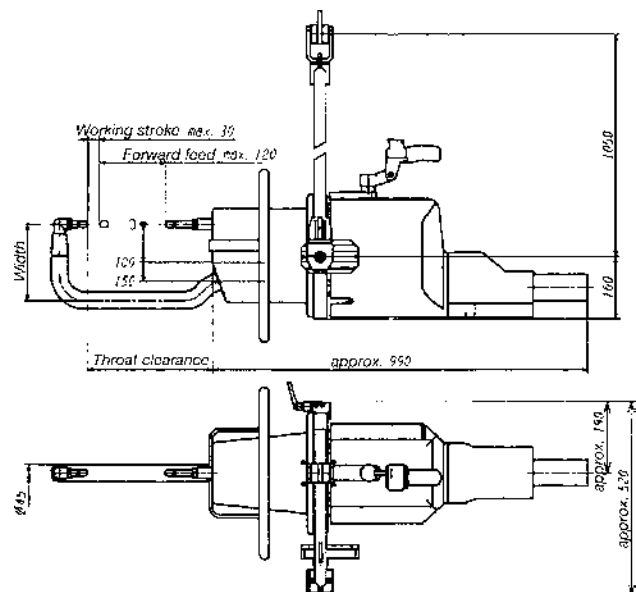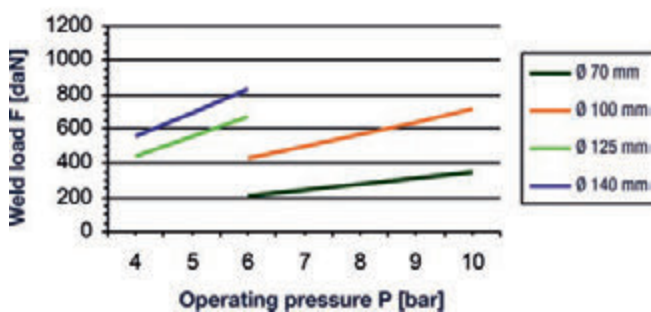

Technical Data

- Arm fitting: 45 mm dia.
- Throat clearance: max. 600 mm
- Width: max. 500 mm
- Pitch: 100 mm or 150 mm
- Type of power source: Pneumatic
- $P_{max} = 10$ bar (for 70 mm dia. cylinder + 100 mm dia.)
- $P_{max} = 6$ bar (for 125 mm dia. cylinder + 140 mm dia.)
- Limit stops for pivoting area (optional)


- Pneumatic
- AC or MF-DC transformers
- Aluminum or copper fittings
- Optional HD (heavy-duty) version

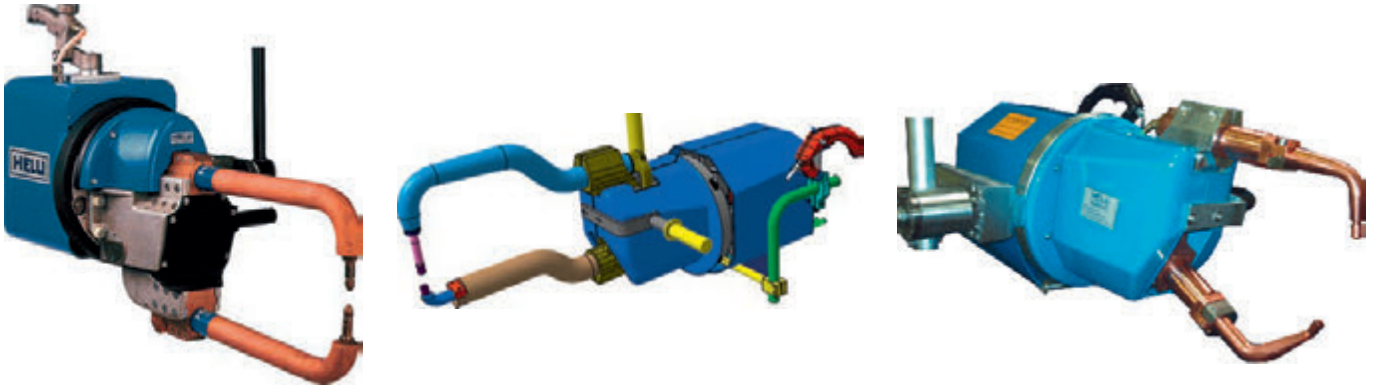

Standard transformer manual weld guns




HD transformer weld guns

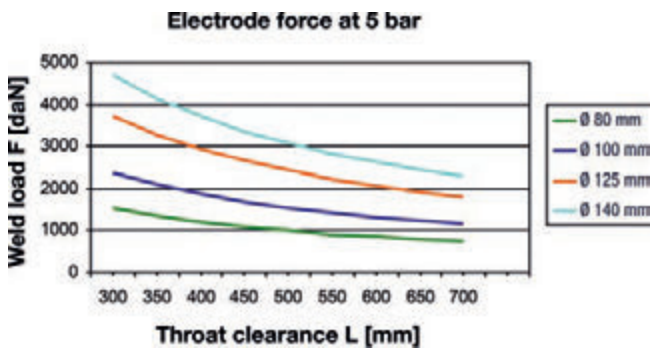

Technical Data

- Scissor-action pliers
- Arm mounting: 45 mm dia. or 50 mm dia.
- Throat clearance: max. 700 mm
- Pitch, above 100 mm to 350 mm
- Pitch, below 100 mm to 250 mm
- Type of power source: Pneumatic
- $P_{\max} = 6$ bar (for 125 mm dia. cylinder + 140 mm dia.)
- $P_{\max} = 10$ bar (for 80 mm dia. cylinder + 100 mm dia.)
- Limit stops for pivoting area (optional)

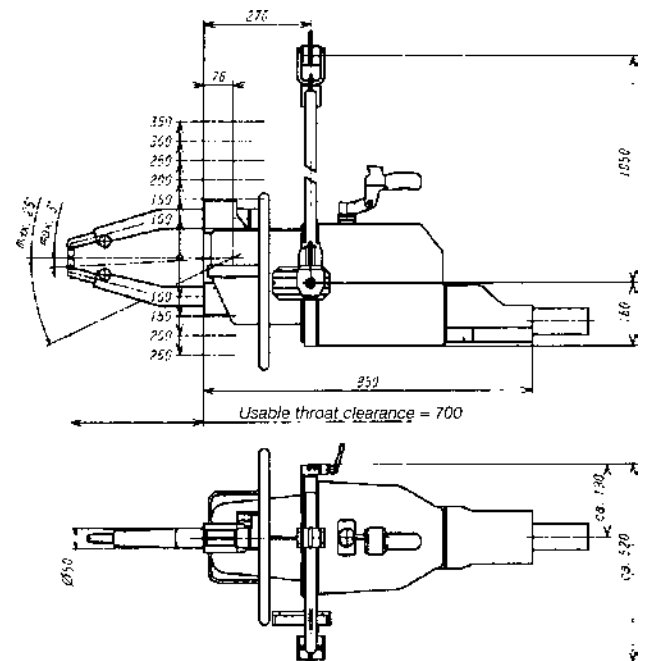




Tunnel weld gun (GM - Opel)



Roll seam weld gun (AEG)




Dual weld gun (Benteler - Mini)

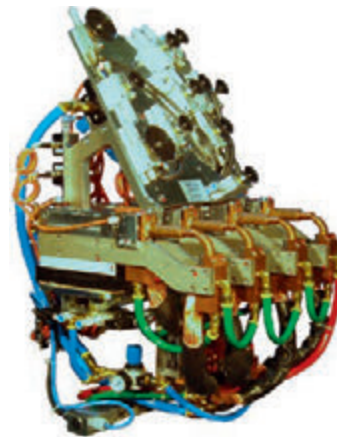


Special weld gun (AEG)

- With structural modifications, standard products can be prepared and used for the widest variety of applications, with no adverse effects on reliability and weld quality.
- Based on the welding task, the optimum solution can be devised.

- Compact configuration
- Available with AC or MF-DC transformers
- A wide variety of design options, based on the TÜNKERS modular system

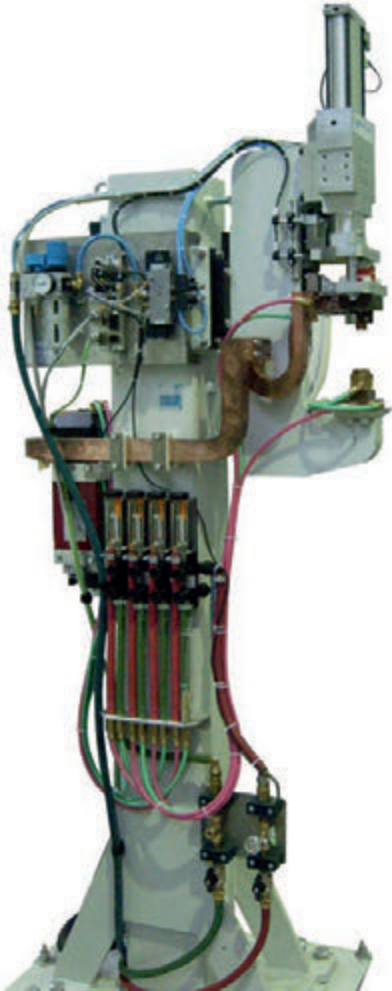

Single C-frame weld unit

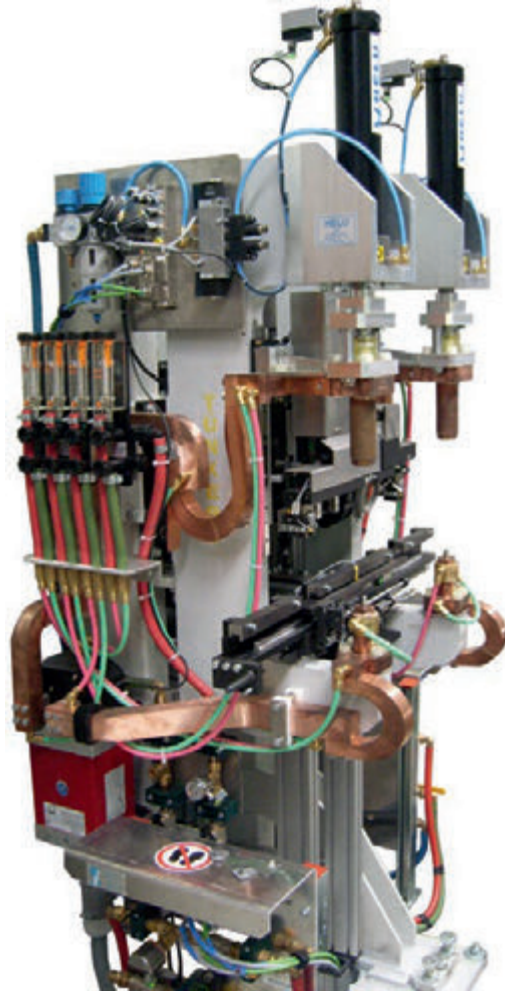


Dual C-frame weld unit


Technical Data

- Solely pneumatic type of power source, with TÜNKERS Multi-Force Cylinder (also servo-electric on request)
- Weld load up to 40 kN
- MF-DC transformer (also AC on request)
- Cooling water circuits via distributors with individually-controllable float-type flow meters
- Individually adjustable working height
- Also suitable for multiple welding tasks due to the narrow configuration
- Process monitoring by means of a position sensing system
- Automatic infeed system can be used, to client's specification
- Short maintenance periods due to good accessibility to parts subject to wear (open configuration)
- Media deactivation via HIP

- Active press-welder fixtures are used for stationary or rotary table applications during spot welding or projection welding.
- Different welding operations in cascade sequence are possible in one stroke of the machine.

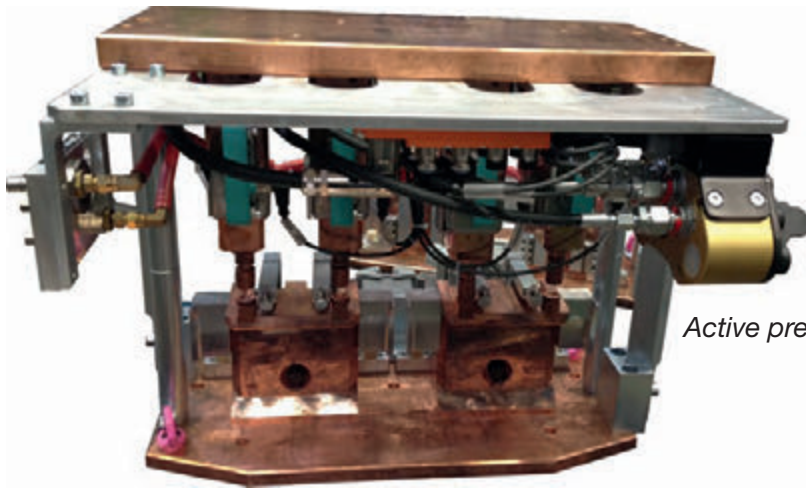


Active press-welder fixtures

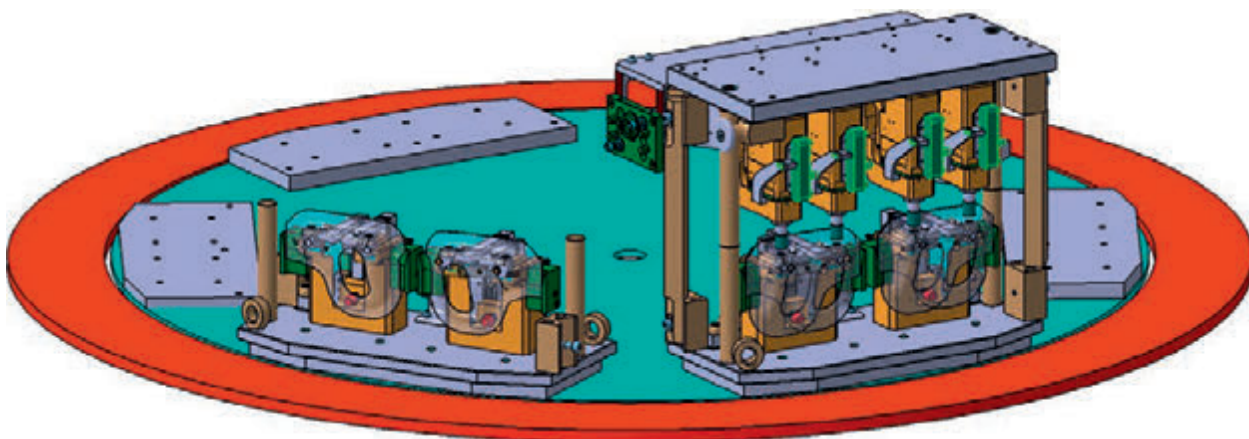

Technical Data

- Active welding elements 25 mm dia. to 50 mm dia.
- Type of power source: oil or water-hydraulic at up to 150 bar operating pressure
- Tool size dependent on the number of welding positions
- Pneumatic ejectors
- Process monitoring via position sensing system
- Version as single-stroke or cascade tool
- Rapid tool changeover due to fast media coupling

DOSING

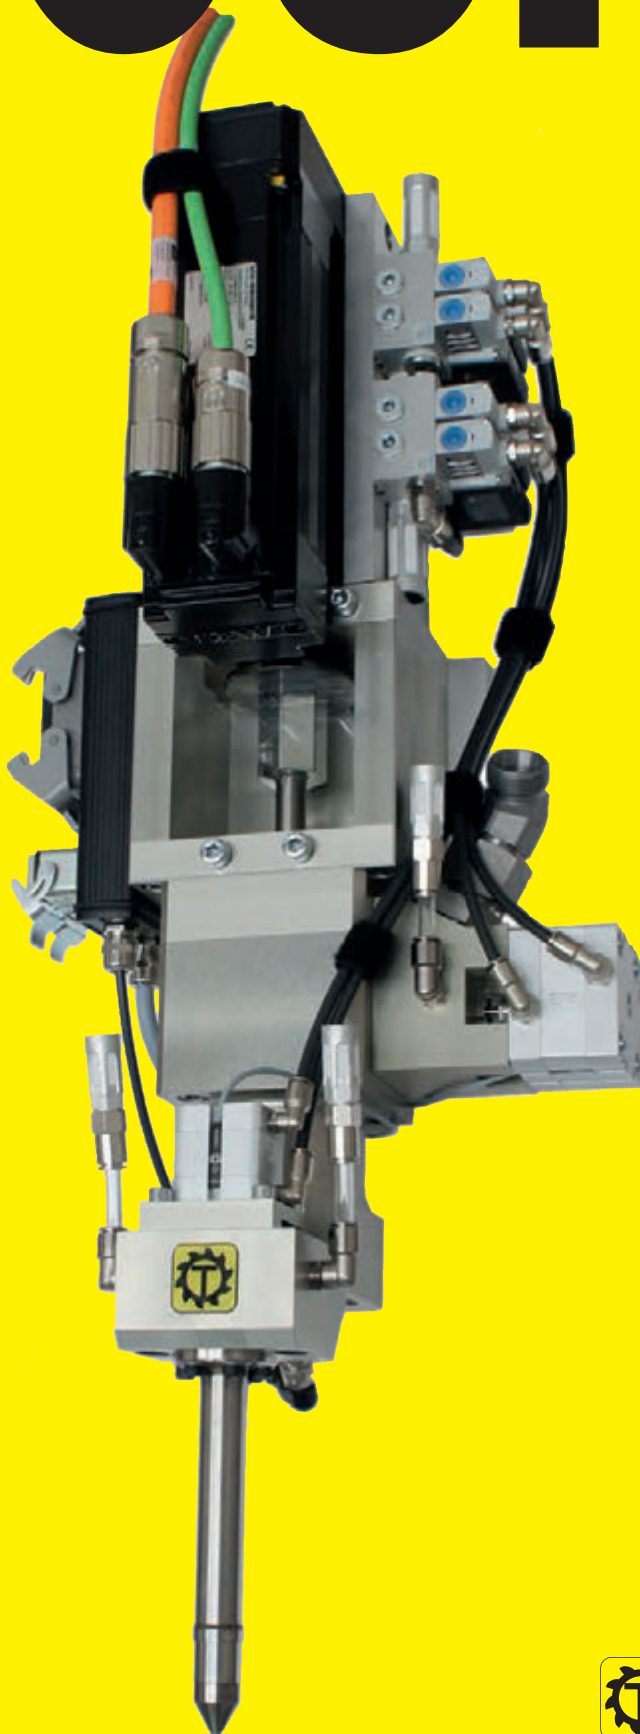



Dosing

In recent years, the dosing of adhesives, sealing compounds, filling materials or even grease has gained increasing significance.

Not only in automobile manufacture but also in machinery and plant construction, dosing systems are always facing new challenges.


When dosing such materials onto the widest variety of components, the following parameters are of prime importance: **precision, speed¹ of application and accuracy of repetition.**


However, the **ease of maintenance and repair** of dosing systems are equally essential requirements. For this reason, in developing our TÜNKERS Dosing Systems we have paid particular attention to these factors.


With our product portfolio, we cover a very wide range of the dosing applications that the market demands.

The product portfolio described here can be adapted to satisfy your requirements. The TÜNKERS Team will be pleased to respond to your new challenges.

Contact: www.tuenkers-nickel.de and info@tuenkers-nickel.de

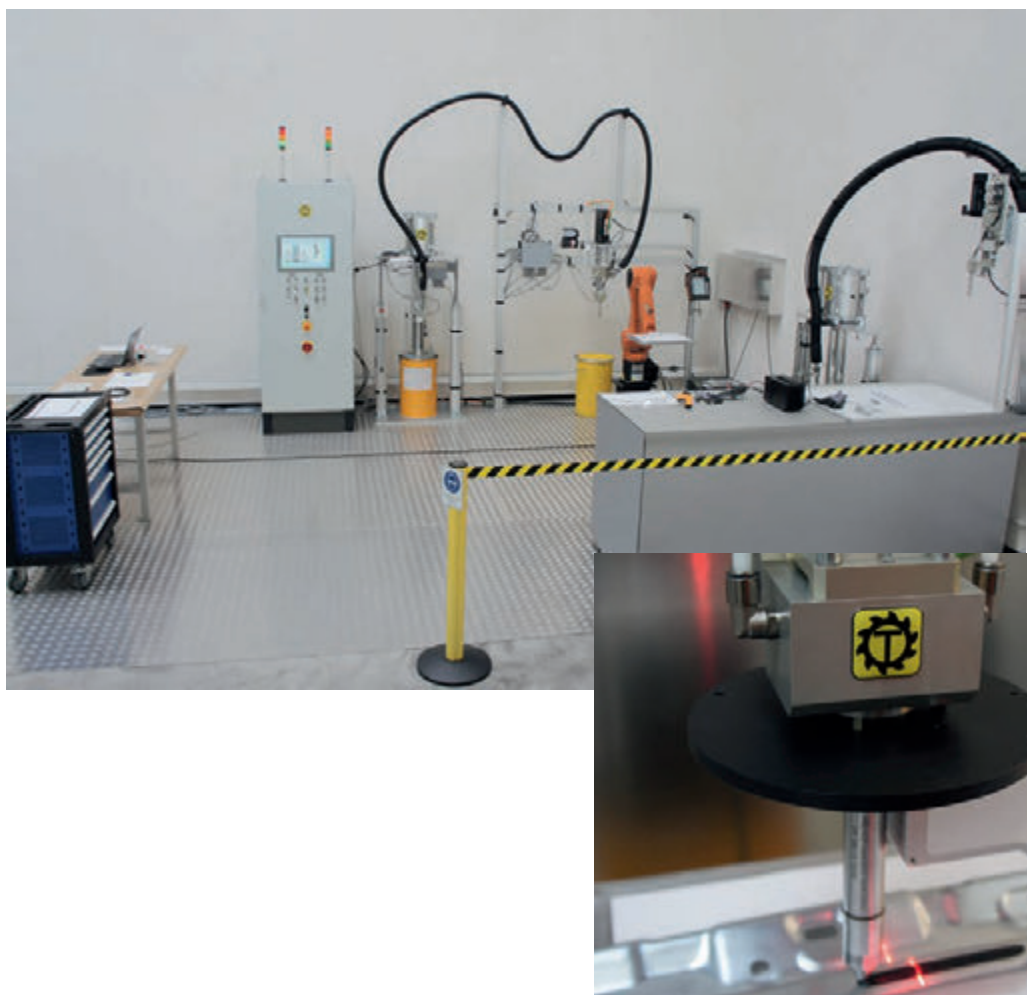

Doser		6-4
Controller		6-5
Pump Stands		6-7
Applicator Heads		6-8
All-electric Dosing Installation		6-9
TÜNKERS Condition Monitoring		6-10
ApplicationMaster Modular Concept		6-11

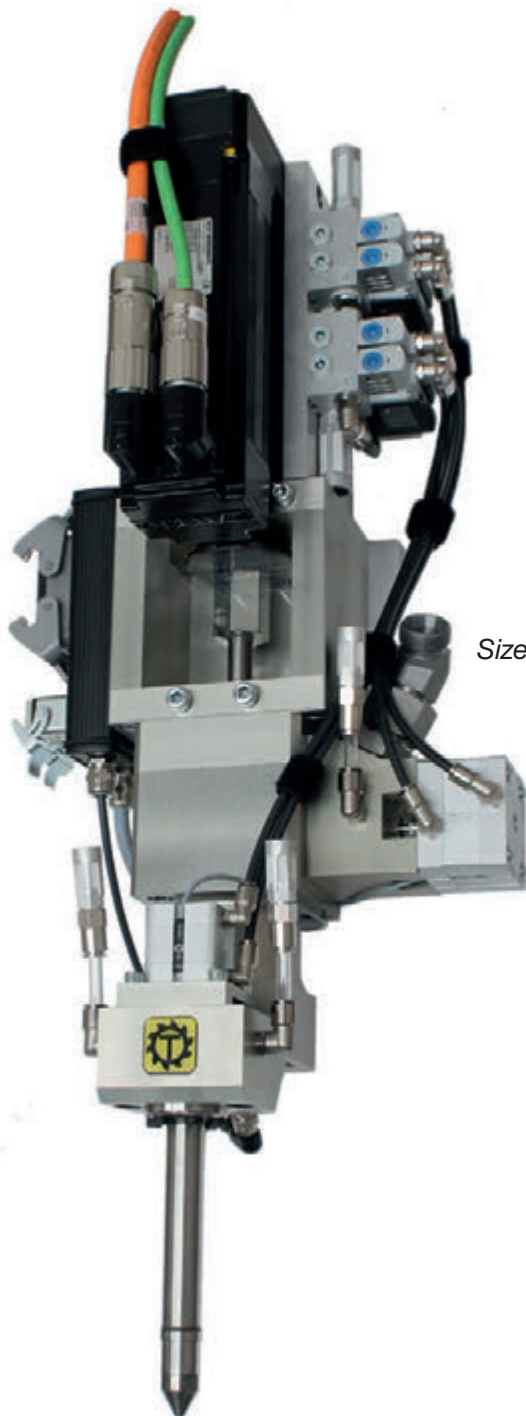

Sizes: 10, 80 and 150

The seal package and the guides of the TÜNKERS-doser are mounted together as one block. Therefore the complete block can be taken out very easy and uncomPLICATE in the case of maintenance.


Based on the FIFO concept, the TÜNKERS doser is designed according to a compact and module way of construction. The maintenance-friendly design of the doser allows uncomplicated and structured workflows.

As well the TCP does not change when the dosing chamber is changed to another standard volume-size. Furthermore there are special dosers for 300 ccm as well as a compact application head for mounting on robots with ~10 kg payload.

Cost reduction due to the interchangeability concept:

With only 5 screws the material-carrying part of the doser can be dismantled from its fixture. Changing the doser in case of a maintenance therefore can be done very fast and without a crane, because the carrying plates, the motor and the electronic parts will stay in the manufacturing station.

This concept leads to a significant cost reduction because in total less spare parts are needed to kept on stock.

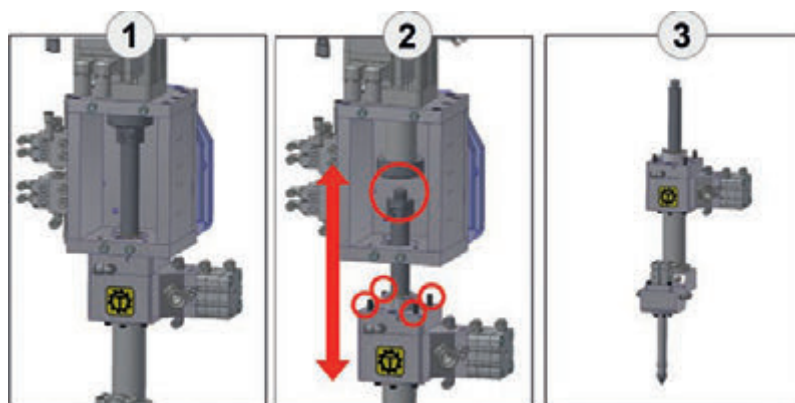



The TÜNKERS dosing controller is designed in a very compact way, but still able to be adapted to individual needs. The controller rack itself needs very little floor space. All connectors are located on the backside of the controller. The socket of the rack has a separate drawer. In this drawer all pneumatic components are mounted very neatly. All the processes itself are controlled by a Siemens SIMOTION.




This platform was enhanced together with the support of SIEMENS to run as well the complete dosing process on it.

Furthermore still the PLC-functions are available. Therefore this concepts allows customized adaptations, even afterwards at the customer. At the touchpanel monitor different user levels can be settled up.





Control/Display Unit

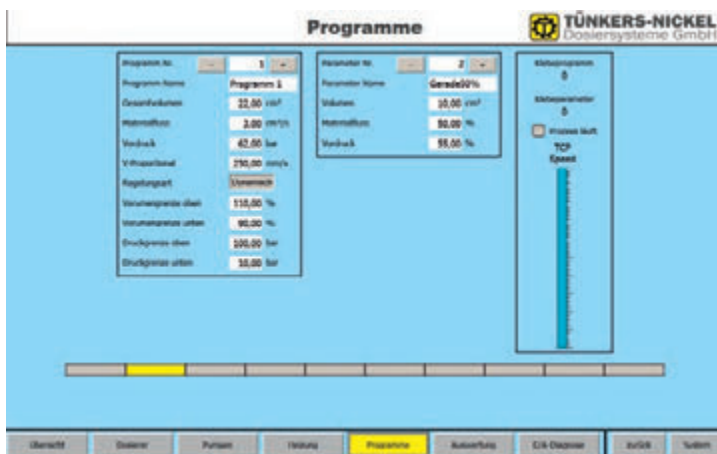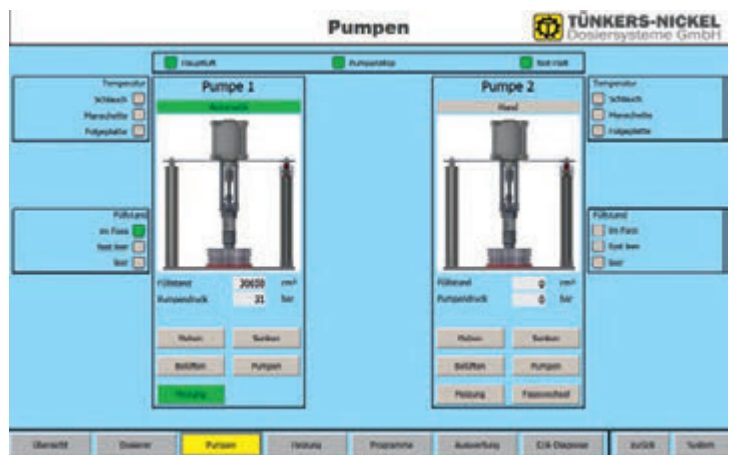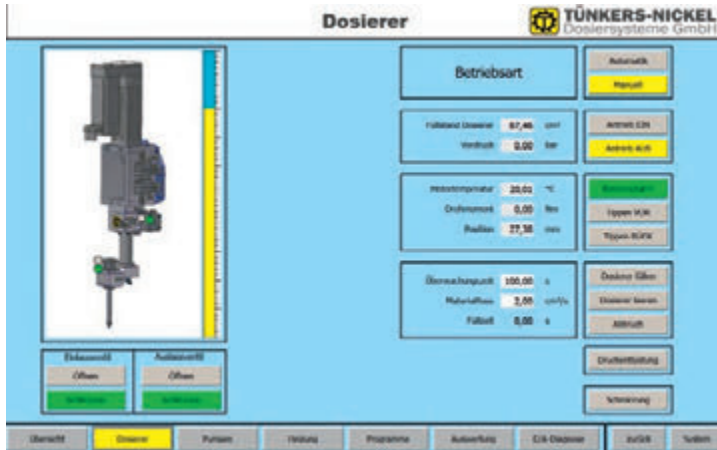

The TÜNKERS barrel pump stations are designed in a very modular way to allow a maintenance-friendly usage as well. There is a robust displacement encoder mounted on the cylinder to get a permanent reliable signal about the filling level of the barrel.

The TÜNKERS piston pump is very robust, durable and easy to dismount. The seal package of the piston pump itself is easily to replace as well. The straight and cylindrical design allows a very close and therefore energy-efficient fixing of the heating sleeve on the pump.



*Sizes:
30, 50 and 200 litres*

*Pump stand with FW01
drum changing system*






Applicator Heads


With TÜNKERS dosing systems several different application methods are possible.

Next to the 1-component dosing heads, like for example the adjustable, electrical swirl head for very accurate application pictures, there are 2-components heads available.

The 2-components heads can be chosen between static and dynamic mixing heads.

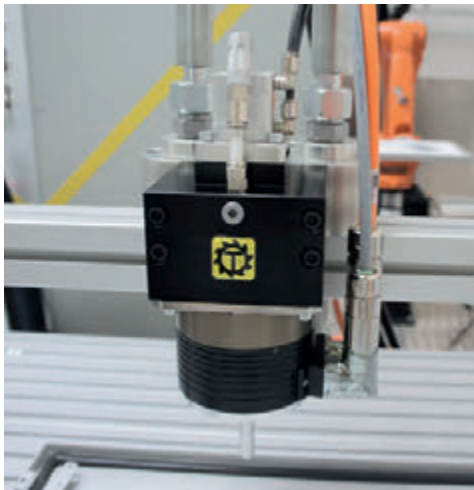


2K Dynamic Mixer

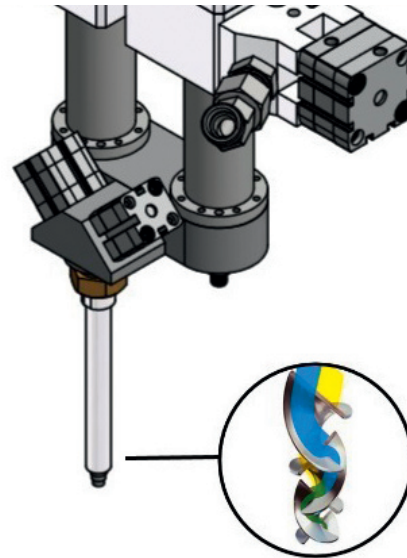

2K Static Mixer



eSwirl Applicator Head

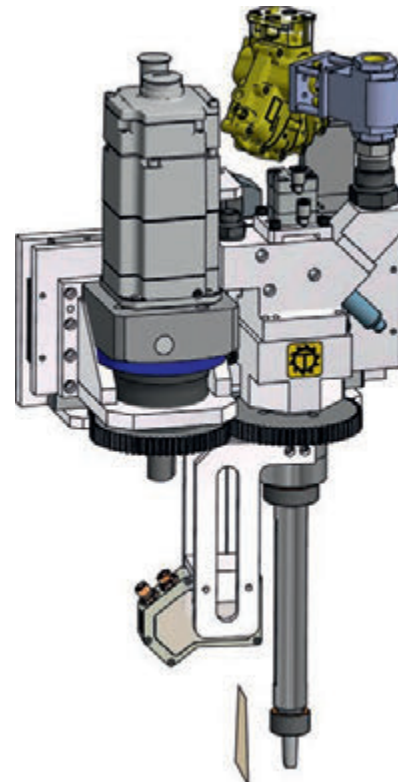

Windscreen bonding (7th axis)

TÜNKERS-NICKEL has developed the worldwide first fully electrical dosing system that reaches the same price level as a pneumatic dosing system. Above that the fully electrical dosing system saves costs during operation due to that there is no air consumption by cylinders.

Furthermore the barrel changing process can partly be automatized due to the usage of electrical components. This automatization helps to prevent potential accident risks for the operator.






TÜNKERS Condition Monitoring

Based on the concept of Industry 4.0 the TÜNKERS-dosing controller has been enhanced with a webserver functionality. Depending on different user levels, several process and sensor datas can be collected via the network by a central software. With these datas a complex picture of the performance in production can be created.

Especially in combination with the TÜNKERS leakage sensor a upcoming maintenance case can be predicted in a very early stage.

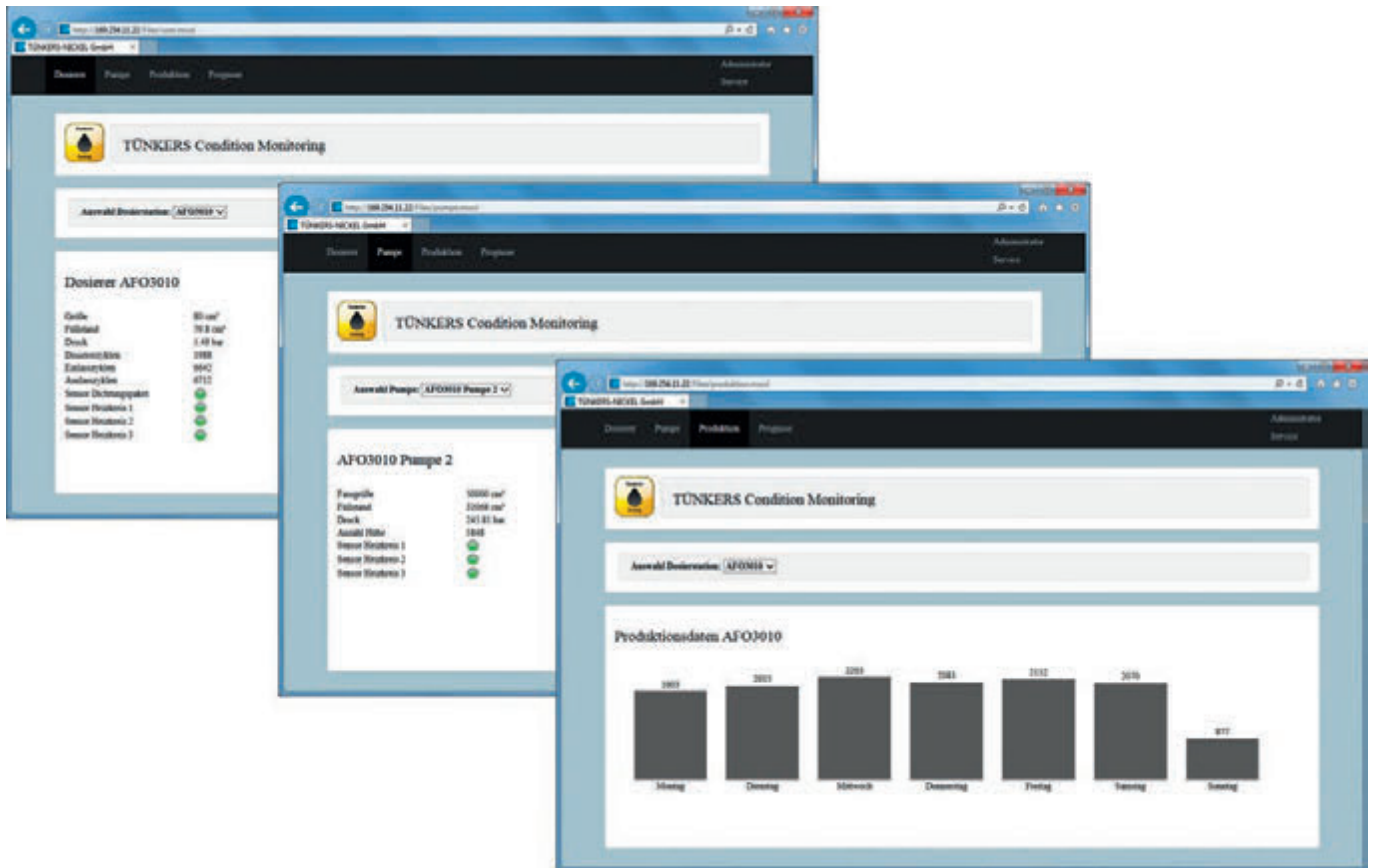

Configure your own flexible dosing system

The 4 modules (**barrel pump station**, **system/dosing controller**, **doser** and **handling unit**) of the TÜNKERS ApplicationMaster allow for a very flexible and easy way of building up a dosing workstation. The modules themselves are freely configurable and can be changed by the customer in line with new tasks.



Collaborative Version



Classic Version

ROTATING





Rotating

Rotating is an established process used in automated production lines. To be exact, it involves incremental rotating and positioning in manufacturing installations. Typical applications include feeding in workpieces by means of a 180° movement and circular indexing table, whereby work sequences are arranged in circular form. High acceleration and braking functions are also requirements of rotary tables, as the precise positioning for the operating positions and the dwell period. The product range offered by EXPERT-TÜNKERS and SOPAP includes standard rotary tables with performance figures up to 150,000 Nm at dimensions of up to 10 metres diameter. All the systems features maximum accuracy of processing and are therefore suitable for use in high volume series production plants.

Rotary Index Tables



7-5

Simplex Rotary Tables



7-13

Compact Rotary Tables



7-19

Parallel Shaft Index Drive



7-27


Manual Rotary Tables



7-31


ROTATING

Rotary Index Tables





Rotary Index Tables

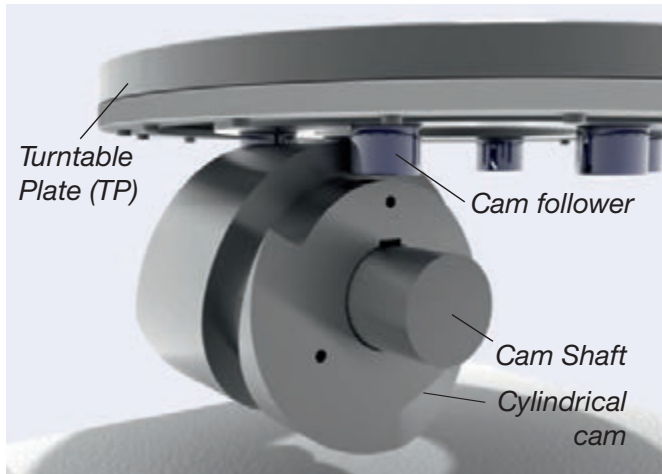


Rotary index tables are circular indexing drive mechanisms in which the torque generated by the geared motor is transferred to the turntable plate via an index cam, using cam follower.

Features of this type of construction include the transfer of extremely high power combined with compact dimensions.

The optimum meshing between the cam and cam follower ensures a nearly zero-backlash positioning of the rotary table.

The EDX Series of rotary tables incorporate indexing drive mechanisms for rotary movements with more stringent demands in terms of precision and repetitive accuracy. The complete motion profile, with acceleration, deceleration and output angle, is achieved by means of an individually-manufactured index cam. For this reason, efficient conventional AC drive mechanisms with constant rotational speed can be used as the power source.

The EDX Series of rotary tables are not only suitable for conventional use as rotary tables but also as trunnion drive units with a horizontal axis of rotation.

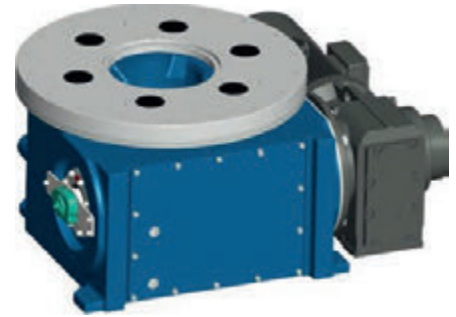

Minimum free play in the operating position due to the cam drive principle

A characteristic of EDX Series rotary tables is the fact that the dial plate is continuously driven by two cam followers. In addition, this double meshing of the roller pins ensures virtually zero-backlash locking of the turntable plate in the operating position. Alternatively, this can be achieved by widening the zero position.

SMARTTURN: rotary position sensor instead of mechanical switchgear

As an option, the current generation of fixed-position rotary tables can be equipped with the specially-developed TÜNKERS 'SmartTurn' control unit. This compact control unit with suitable inductive rotary position sensor replaces the previous electromechanical switchgear.

This combination of modern control unit and the proven precision of the EDX Series results in a reliable and future-proof product for a wide range of applications:

- Self-learning system
- Commissioning via the first motion cycle
- No readjustment required
- Monitoring of the braking distance and wear
- Warning signal to replace brake discs and safety cut-off




Standard stops

The indexing positions of the rotary table are defined in the motion profile specified in the indexing cam. Most common, partitions are 2-stop = 180°, 3-stop = 120° and 4-stop = 90°.





Individual solutions are available on request.



Fixed-position Rotary Tables – EDX Series

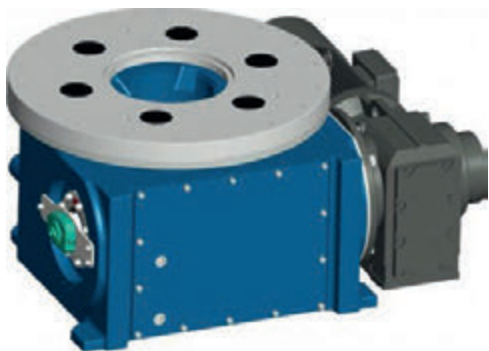

- Precision indexing drive with fixed position and energy-efficient 3-phase AC geared motor
- Smooth and impact-free motion sequence due to specific law of motion on the cylindrical index cam
- Low backlash, positive lock position without any additional locking devices in the operating position
- Optimised power transmission and emergency stop safety due to multiple cam follower principle
- Can be used as table and trunnion drive unit

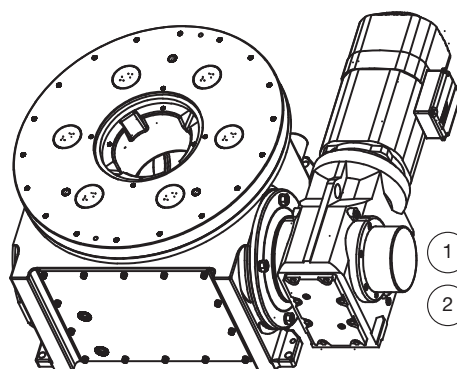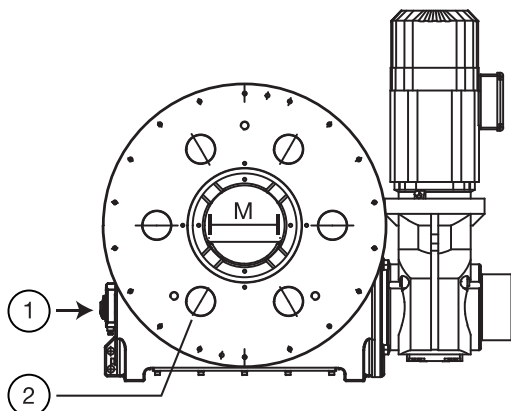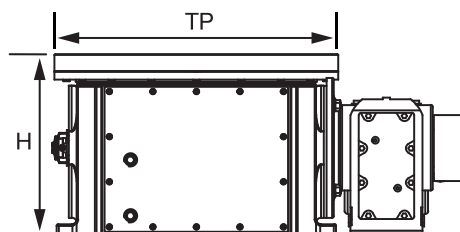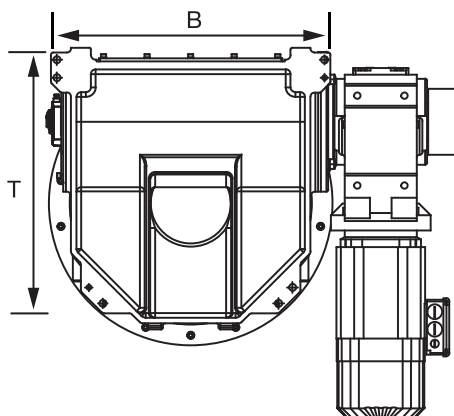

- 1 Standard SMART-TURN control unit
- 2 Position of the cam follower in the basic setting

Type	TP Turntable plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Weight (kg)
EDX 610	360	80	250	378	416	180
EDX 700	450	100	310	508	466	230
EDX 810	560	150	360	620	564	380
EDX 960	710	200	450	700	650	720
EDX 1170	920	280	550	890	895	1375
EDX 1370	1120	380	620	1090	1085	2150
EDX 1600	1350	464	720	1300	1315	3750

Subject to technical modifications.

In addition to fixed-position rotary table, flexible rotary tables are equipped with an index cam with a constant pitch: resulting in an unchanged reduction ratio between the motor and the turntable plate. The partition is exclusively determined by the correspondence control unit of the servomotor.

The flexible rotary tables can be adapted to almost any load by individual programming. In this case, the flexible servo geared motor not only enables the free setting of the output angle, but also an optimized acceleration response for the particular load.

Being flexible in use, the rotary tables of this type are particularly suitable for drive tasks in which the movement sequence has to be adapted in production process, for example by new loads, new positions/end positions or travel directions. A typical example is the production of different vehicles on a production line, which makes flexible modification necessary in the production cycle.









Flexible Rotary Tables – EDH Series



- High performance indexing power unit with flexible positioning and individually programmable servo-motor
- Smooth and impact-free motion sequence due to the special motion profile of the servo-motor
- Optimised power transmission and emergency safety stop due to multiple cam follower principle
- Compact design with high performance
- Can be used as table and trunnion drive unit

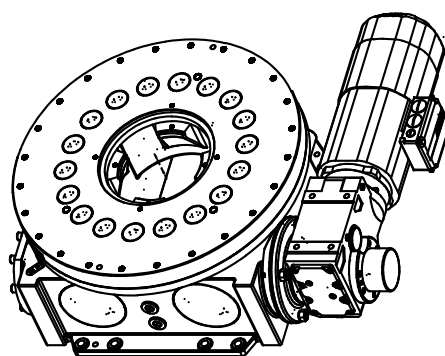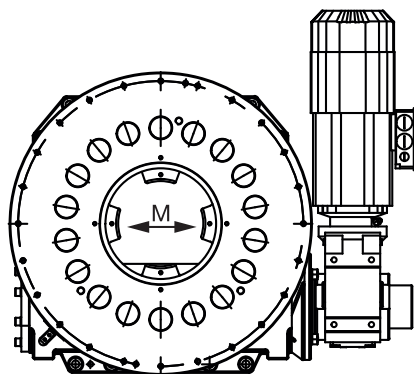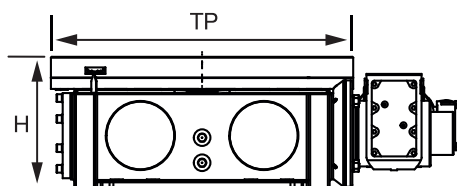
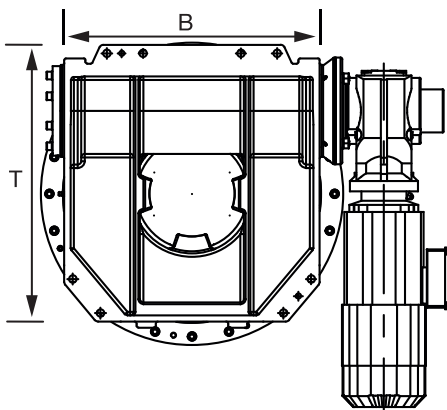


ROTATING



Type	TP Turntable plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Number of cam followers	Weight without motor (kg)
EDH 610	360	80	190	300	347	12	110
EDH 700	450	90	240	380	435	16	200
EDH 810	560	140	280	480	535	16	320
EDH 960	710	200	310	600	650	18	500
EDH 1170	920	300	360	800	870	20	700
EDH 1370	1120	380	420	1000	1065	20	1550
EDH 1600	1350	500	480	1220	1320	20	2350

Subject to technical modifications.

Heavy-duty Rotary Tables – EDH Series

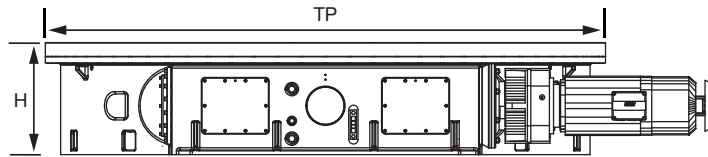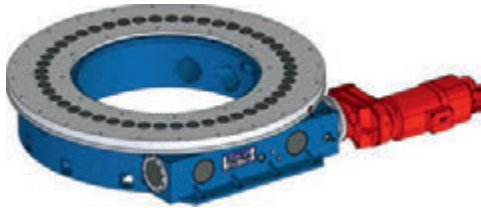

- Heavy-duty rotary table with flexible positioning and individually programmable servo-motor
- Smooth and impact-free motion sequence due to the special motion profile of the servo-motor
- Optimised power transmission and emergency safety stop due to multiple cam follower principle
- Flat ring construction with large center passage

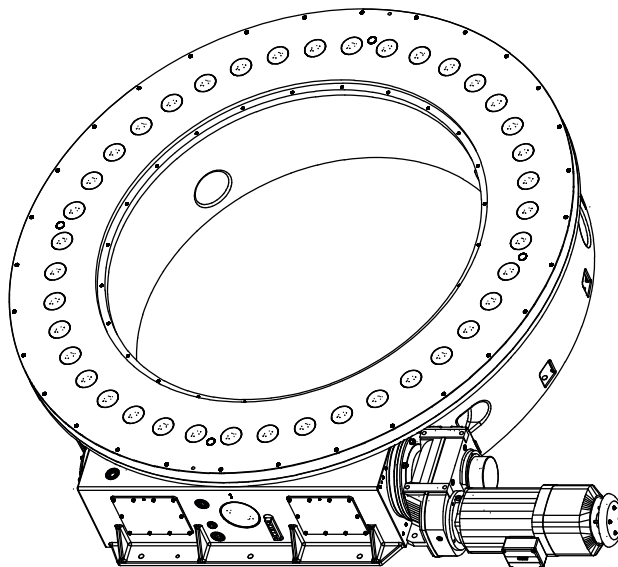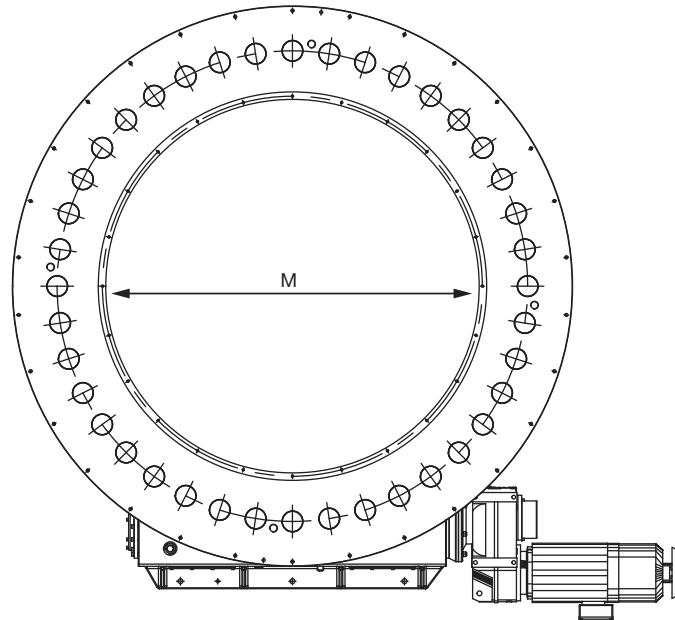


ROTATING

Type	Turntable plate outside dia. (mm)	Turntable plate inside dia. (mm)	H Overall height (mm)	Number of cam followers	Weight (kg)
EDH 2050	1800	900	480	30	3100
EDH 2550	2300	1300	450	48	4000
EDH 3250	3000	1700	600	40	6800

Subject to technical modifications.




Typical applications

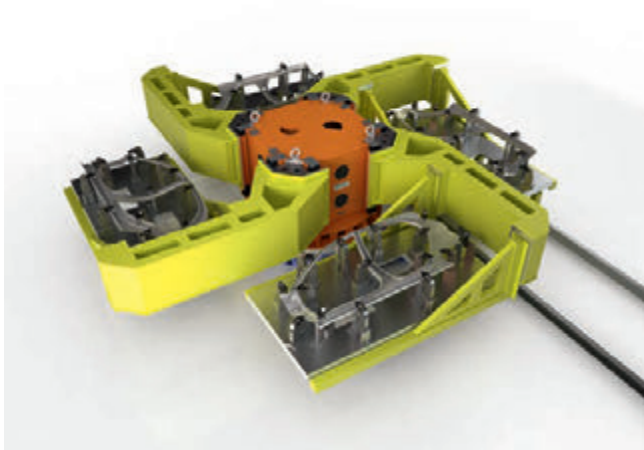


EXPERT Heavy-duty Rotary Lifting Unit, 4-stop positioning



EXPERT Rotary Table, 2-stop positioning

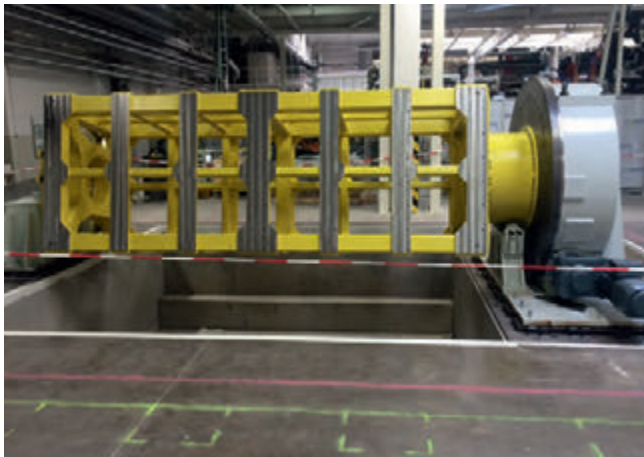

EXPERT Heavy-duty Trunnion, during installation (for 4 tools)

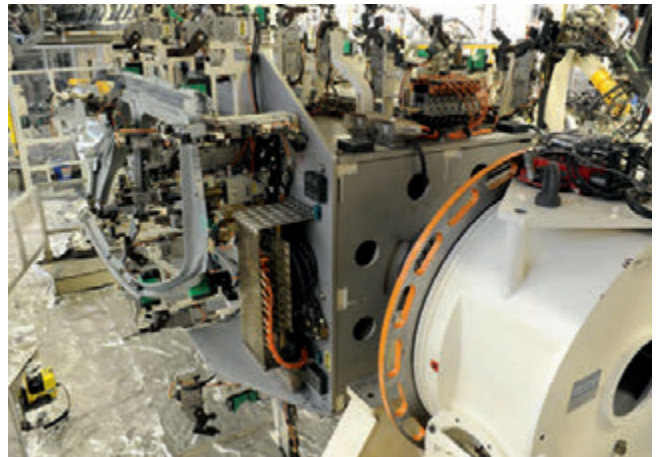

EXPERT Trunnion Drive Unit, 4-stop positioning




EXPERT Trunnion Drive Unit with maintenance looking device



EXPERT Giant Trunnion with EDH 2550, 6-stop positioning

ROTATING


Simplex Rotary Tables






Simplex Rotary Tables

Simplex means 'simple' and that term accurately describes this series of rotary tables, constructed using a smaller number of basic components. The rotary motion from the geared motor is transmitted to the dial plate by means of a sprocket wheel or a toothed belt. This configuration is a simplified form of precision power unit and, in turn, an inexpensive system, also equipped with a position release unit.

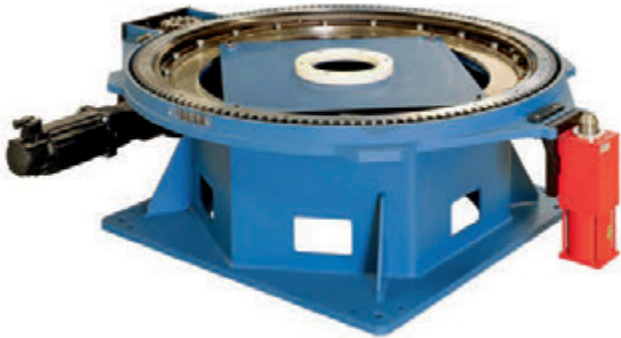

Example: TXE Rotary Table with rack-and-pinion drive

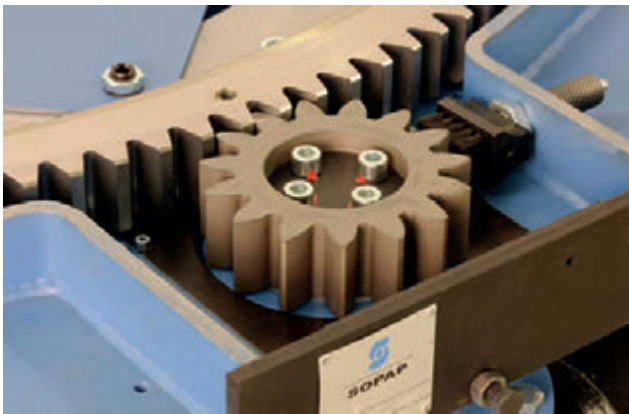





Detail of the drive unit

Due to the simple structure and the optional components, this system is particularly suitable for logistical tasks, such as use with bin changeover systems or fixture stations.

Simplex Rotary Tables – TXR Series



- Rotary table with toothed belt drive
- Drive reversible through 270°
- Exceptionally low-profile configuration
- Optional precision release unit
- Motor can be mounted externally
- Rugged drive unit
- Low-profile construction is ideally suited to bin changeover systems, for example

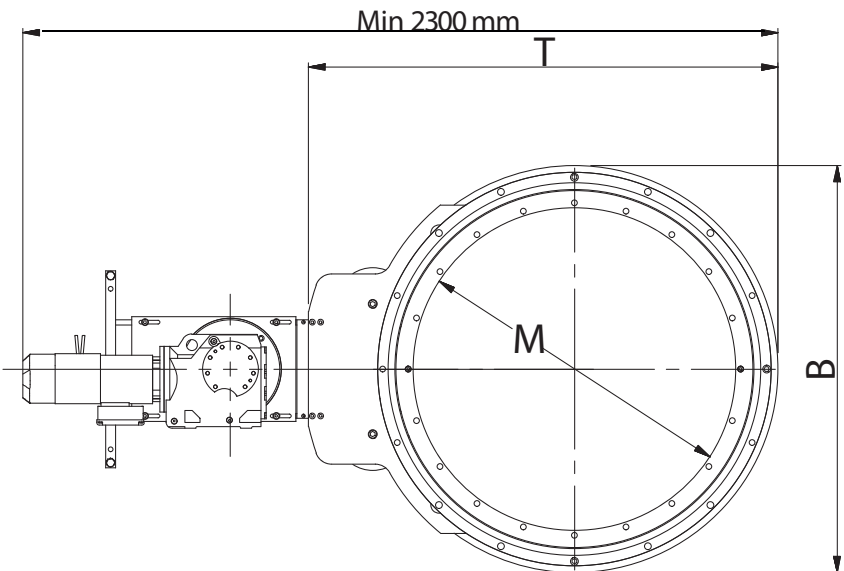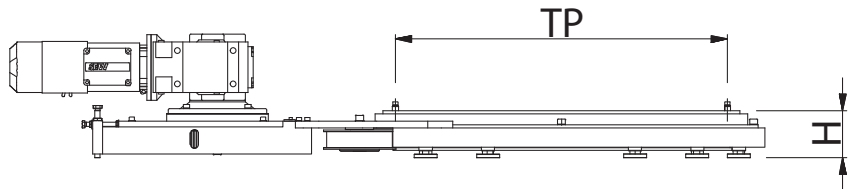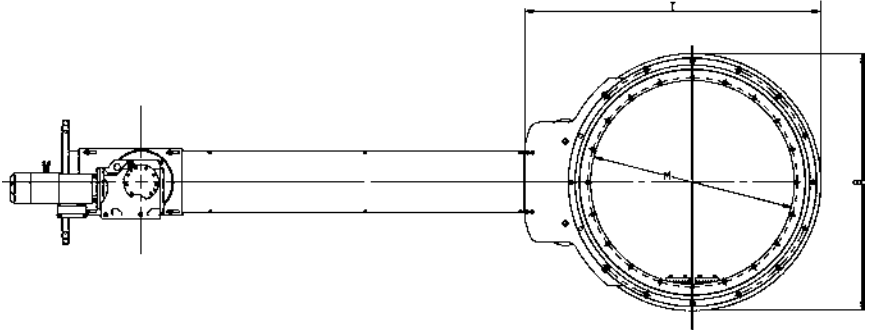

ROTATING

Type	TP Dial plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Weight without motor (kg)
TXR 400	332	304	140	560	750	120
TXR 750	662	634	140	890	1080	200
TXR 1100	1012	984	140	1240	1430	250




Subject to technical modifications.



Simplex Rotary Tables – TXE/TXI Series




- Servo-Rotary Table, reduced to the basic essentials
- Robust cross roller bearings
- Powered by servo-motor and rack-and-pinion
- Simple robust configuration
- Low overall height
- Optional precision release unit
- E = externally-mounted motor
I = internally-mounted motor
- Optional: basic frame, release unit, dial plate

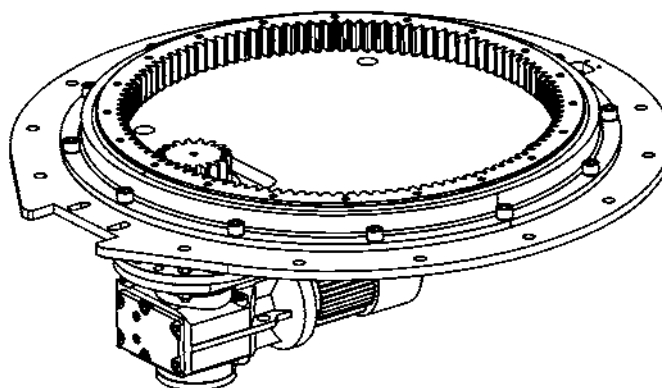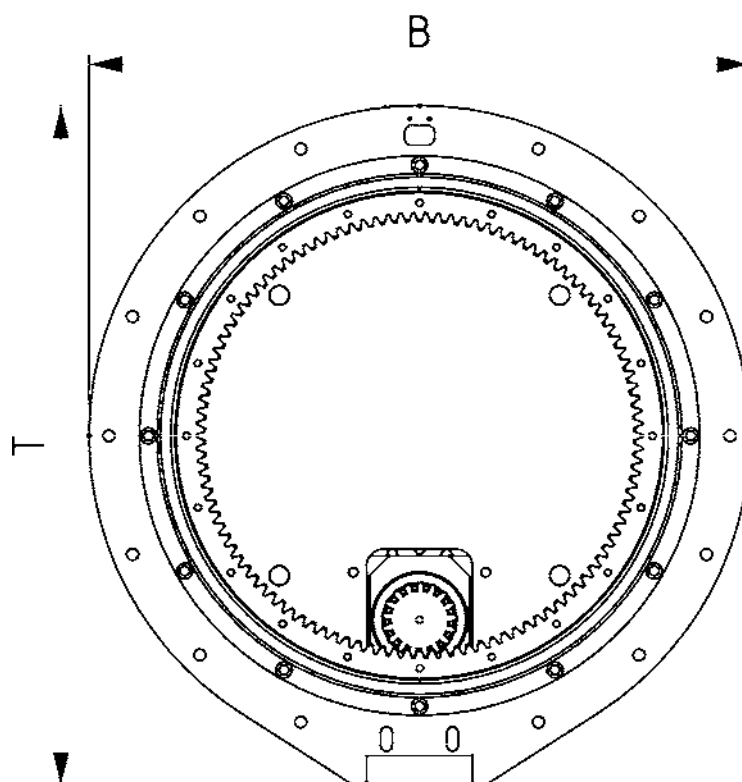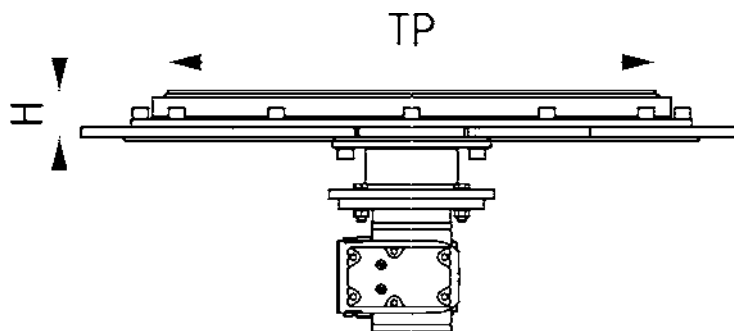


Type	TP Dial plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Weight (kg)
TXI/TXE 400	412,5/415,5	nc/250	71/75,5	680/560	710/770	160/130
TXI/TXE 750	736,5/745,5	nc/530	71/75,5	1000/890	1030/1130	200/220
TXI/TXE 1100	1094/1095,5	nc/830	71/75,5	1400/1253	1430/1498,5	430/300


Subject to technical modifications.

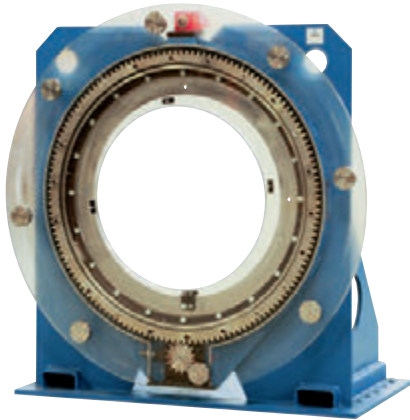

- Servo-Rotary Table for trunnion drive
- Robust cross roller bearings
- Powered by servo-motor and rack-and-pinion
- Simple robust configuration
- Optional: basic frame, release unit, dial plate

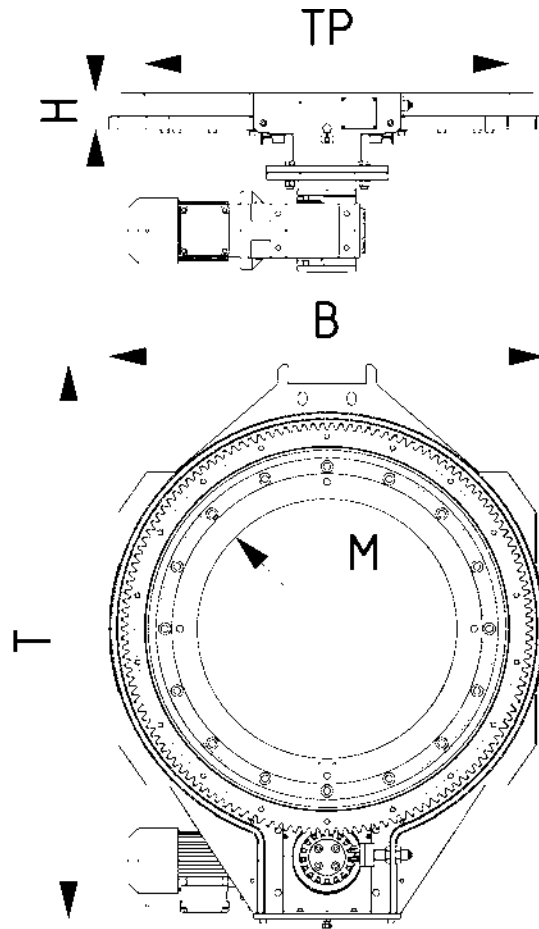

Precision release unit

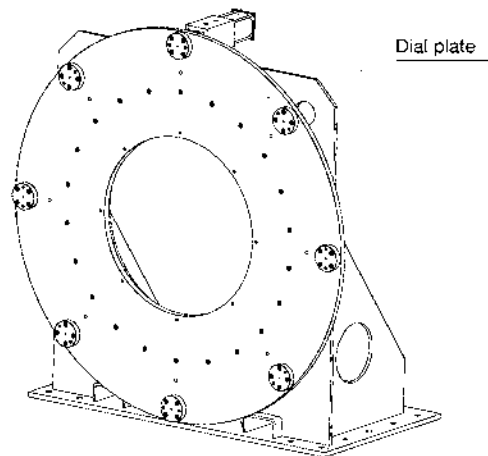


Base frame

Type	TP Dial plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Weight (kg)
TXT 400	415,5	250	75,5	560	770	95
TXT 750	745,5	530	75,5	890	1130	155
TXT 1100	1095,5	830	75,5	1253	1498,5	235

Subject to technical modifications.



Typical applications

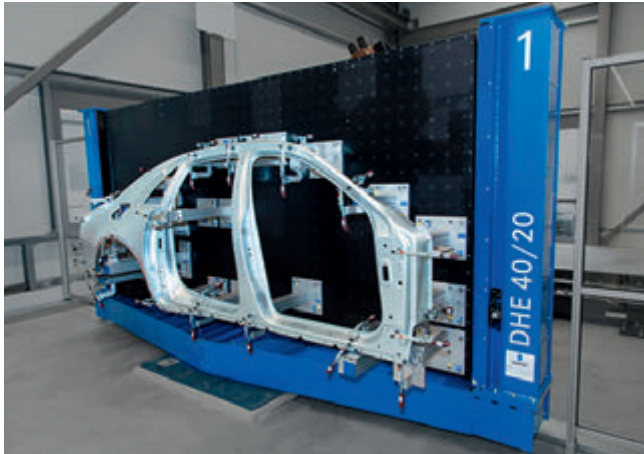

SOPAP TXE 750 – ultra-low profile rotary table for Topometric rotating/lifting unit, used in a fully-automated robot-controlled metrology cell (registered utility model by Topometric GmbH)




SOPAP Low-profile bin changeover system based on the TXR 1100, shown here for 2 bins



SOPAP TXE 1100 Tool unit in car body construction, flexible rotating fixture for tools

ROTATING

Compact Rotary Tables





Compact Rotary Tables

The principal characteristics of compact rotary tables are small size combined with precision. As with cam driven rotary tables, the torque generated by the attached geared motor is transmitted to the dial plate by means of roller and roll pin. Typical applications for compact rotary tables include installations in which high speed movement with precision in relatively confined areas are deciding factors. Examples include areas such as materials handling or medical technology, as well as the packaging industry. In addition to high performance, compact rotary tables are characterised by long service life and ease of maintenance.





Cube-type compact rotary table



Cube-Rotary table

- Drive unit integral with housing for optimum, virtually cubic installation capacity
- Lower overall height
- Inductive position sensing cassette for end position feedback
- 25% more power torque due to optimised gear ratios
- Option: version with 24 V motor

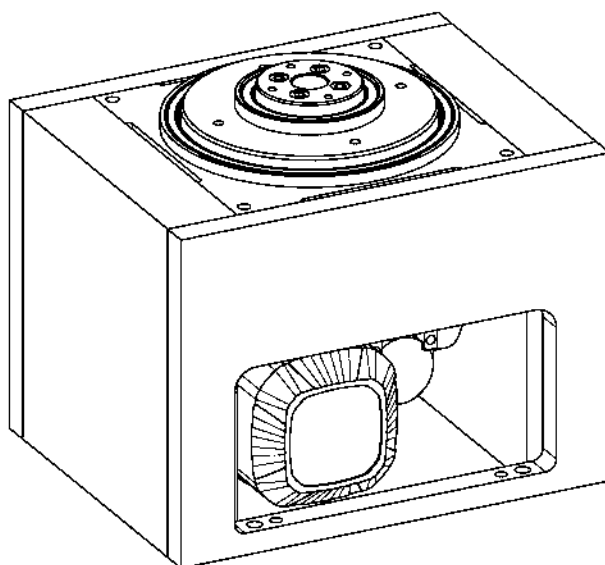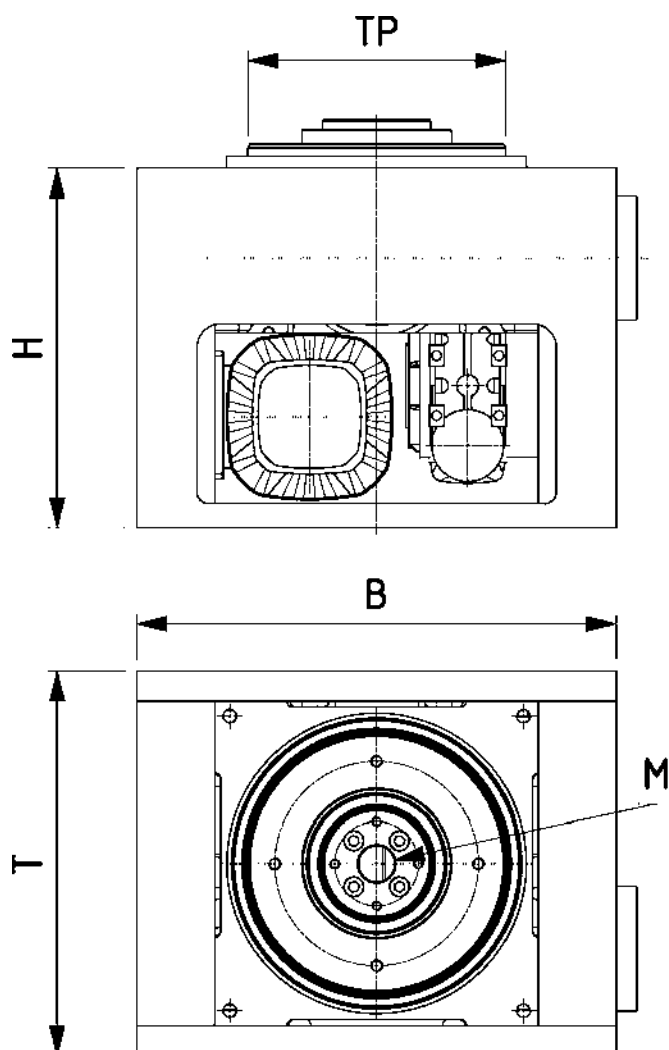

Type	TP Dial plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Weight (kg)
C 100	120	15H8	150	240	180	20
C 300	215	30H8	300	400	320	70
C 500	320	60H8	430	570	410	150

Subject to technical modifications.





TS Series 100





Compact rotary table

- Compact precision rotary table
- Fixed partitioning with dwell periods of 45°, 60°, 90° and 180°
- Pre-stressed precision cross roller bearings for high loadings and precise synchronisation
- High power density
- Multiple mounting variants
- Optional: Flex version with servo drive, 24 V version

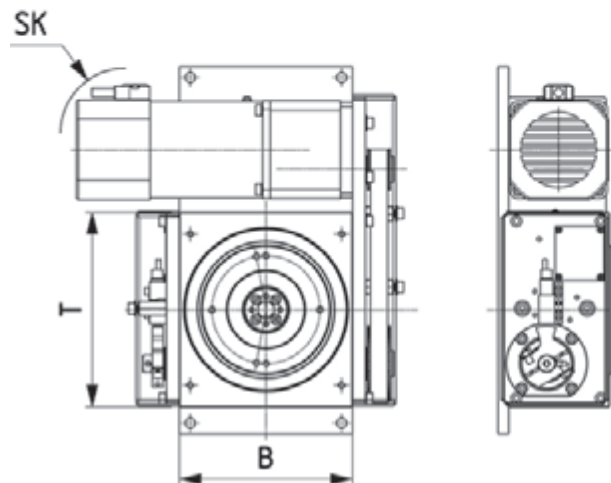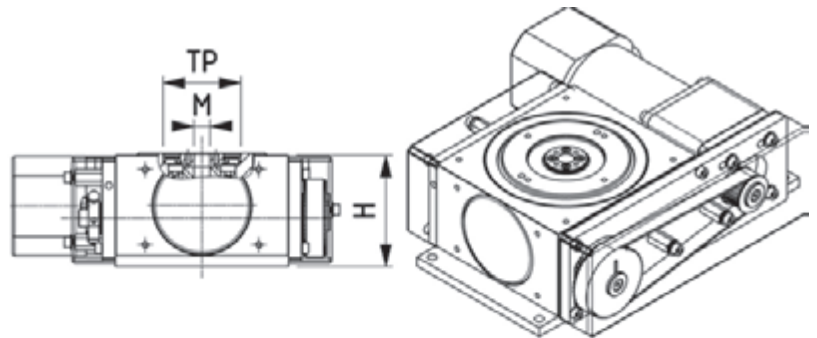



Type	TP Dial plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Weight (kg)
TS 100	120	15H8	103	160	180	20

Subject to technical modifications.

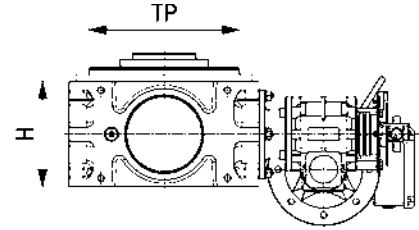

Compact rotary table

- Compact precision rotary table
- Fixed partitioning with dwell periods of 45°, 60°, 90° and 180°
- Pre-stressed precision cross roller bearings for high loadings and precise synchronisation
- High power density
- Multiple mounting variants
- Optional: Flex-Version with servo drive

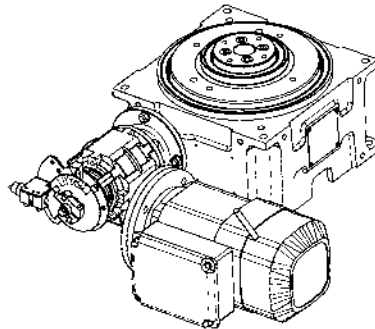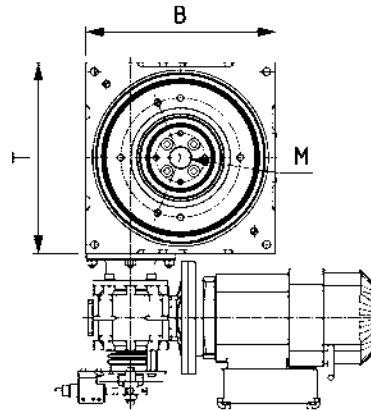


Type	TP Dial plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Weight (kg)
TS 200	160	25H8	120	200	200	25
TS 300	215	30H8	150	270	270	50
TS 400	250	50H8	170	320	320	80
TS 500	320	60H8	230	410	410	125

Subject to technical modifications.







Typical applications

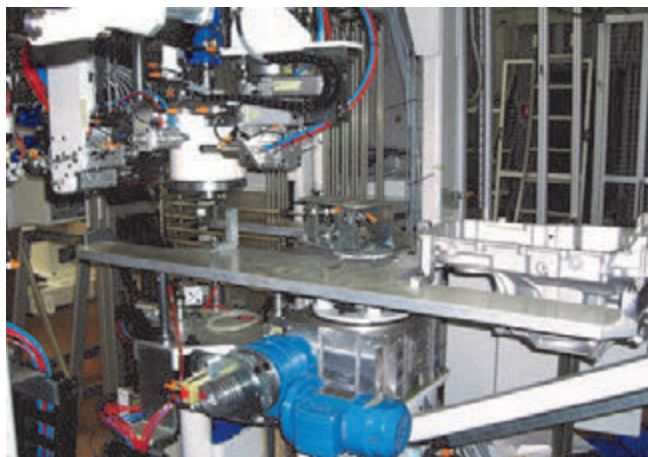

*SOPAP TS 200 Illustration of TS Series in use,
nailing machine for applications in the mechanical
engineering industry*



- Low backlash indexing drive unit with globoidal cam
- Hardened and ground precision components
- Quality bearings with high load capacities
- Low overall height

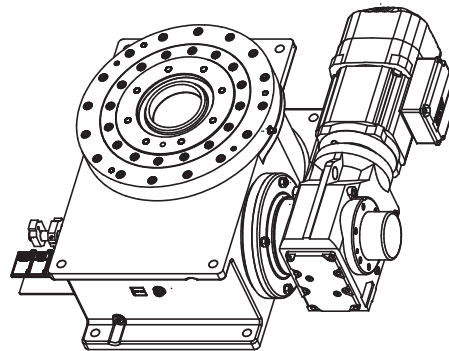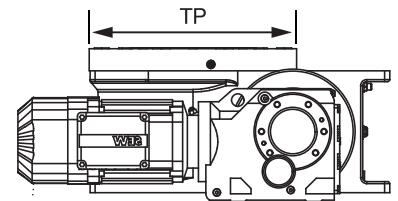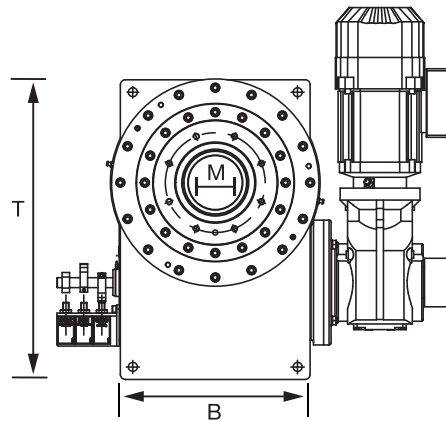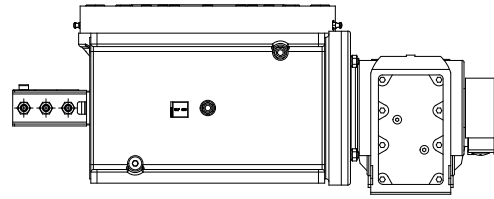

Type	TP Rotating Turntable plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Weight (kg)
EGD 80	76	36	126	140	235	30
EGD 100	100	50	150	200	310	50
EGD 125	122	60	191	240	375	80
EGD 160	212	80	190	280	430	150
EGD 200	247	110	290	380	600	275
EGD 250	445	145	355	405	670	400

Subject to technical modifications.




Typical applications



EXPERT 'Windmill' globoidal index drive with precision locking for floor clamping technology on transport tasks


ROTATING

Indexing Drive Units





Indexing Drive Units

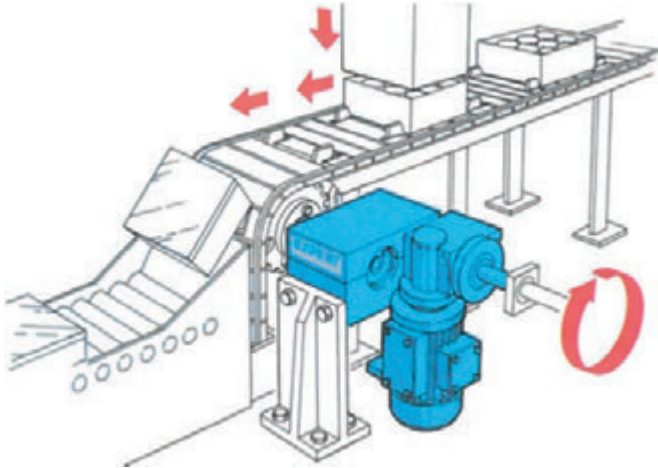


Typical application: parallel shaft index drive in a conveyor installation


The core element of an indexing system is an indexing drive mechanism. In addition to all the indexing systems, Expert-Tünkers and SOPAP also supply index drive units as a component for customer to integrate in their plant systems.

Parallel Shaft mechanism

Implementation of the indexing mechanism by means of cam discs, which engages with the output flange via support rollers to produce the desired output. In the holding position; the dwell period, zero-backlash and positive-locking position of the output shaft is achieved.

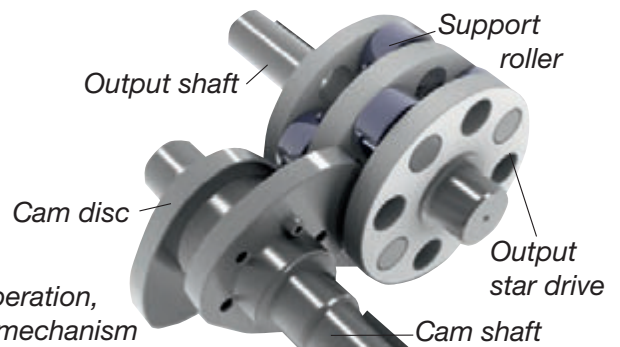


Principle of operation, parallel index mechanism

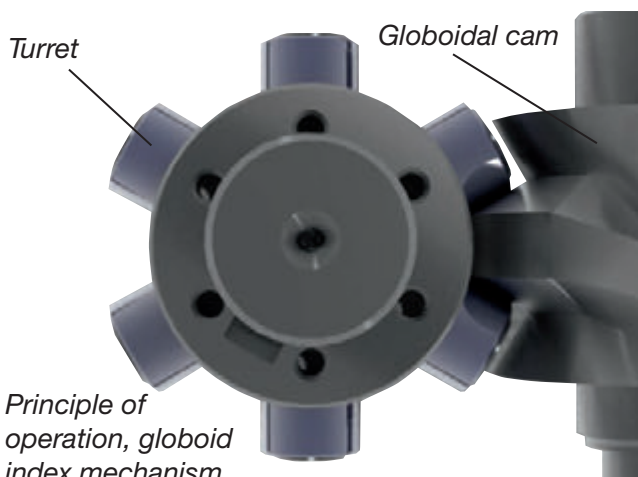



Principle of operation, globoid index mechanism

Globoidal Index Drive

Indexing motion obtained via a globoidal cam, which engages with a turret fitted in the support rollers. Vertical arrangement of the input and output shafts. Virtually zero-backlash mechanism due to eccentric mounting of the index cam. Globoidal index drives can also be supplied as rotary tables with dial plates.

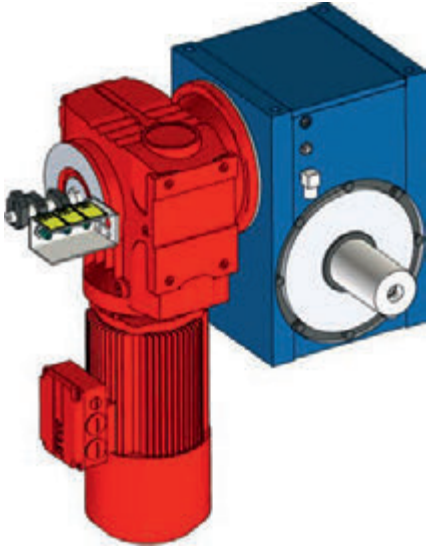

- Index drive unit with right-angled alignment of the input and output shaft
- Backlash mechanically reduced by eccentric mounting of the globoidal cam
- Ideal for oscillating movements with maximum precision demand

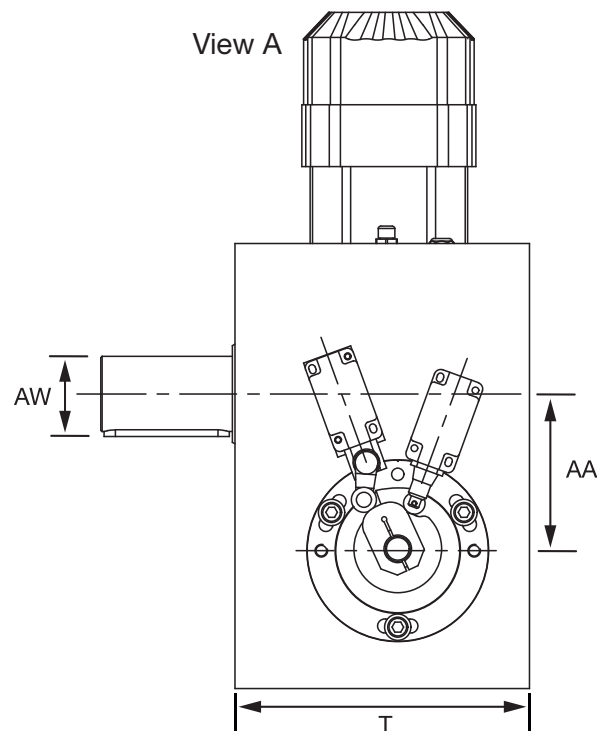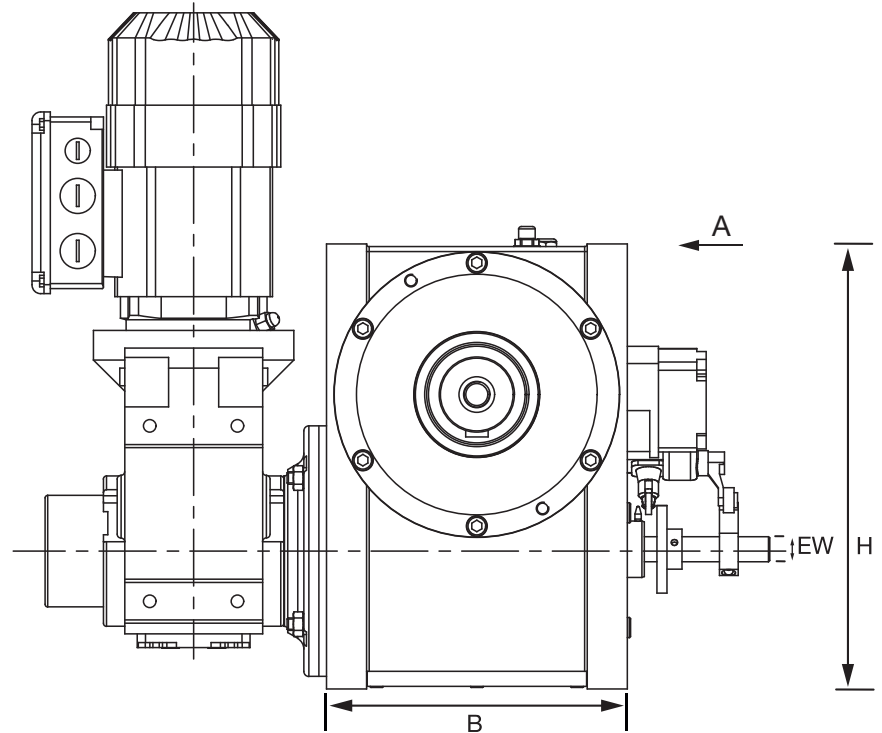

Type	AA Shaft center distance (mm)	H Height (mm)	B Width (mm)	T Depth (mm)	EW Input shaft dia. (mm)	AW Output shaft dia. (mm)	Weight (kg)
EG 50	50	100	140	90	15	28	9
EG 63	63	130	180	120	25	45	14
EG 80	80	160	230	160	40	60	25
EG 100	100	185	280	180	40	65	38
EG 125	125	210	365	220	50	80	63
EG 160	160	270	450	290	50	100	110
EG 200	200	330	550	360	50	130	195
EG 250	250	390	720	500	60	140	385

Subject to technical modifications.




PA Series




Parallel transmission

- Parallel shaft index drive
- Parallel arrangement of input and output shaft
- Zero backlash in the locking position
- Typical use: indexing conveyors with oscillating movements
- Optional: second output shaft
- Motor mounting on the same side as the output shaft

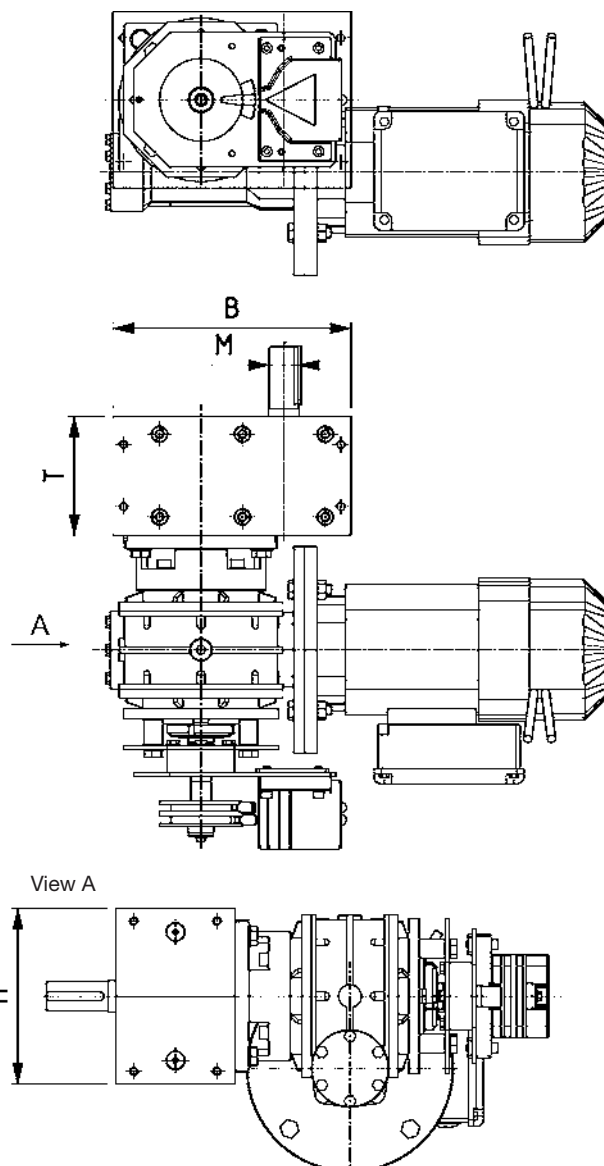

View A

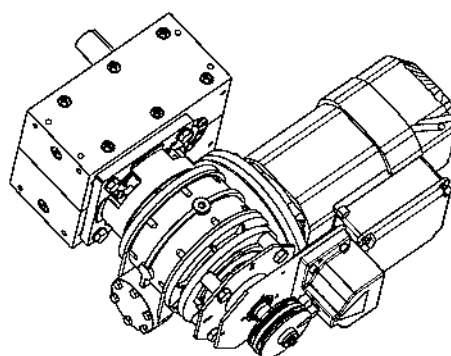


Type	H Height (mm)	B Width (mm)	T Depth (mm)	M Output shaft dia. (mm)	Weight (kg)
PA 65	180	90	130	19	7
PA 80	230	115	170	28	15
PA 105	290	140	200	30	25
PA 130	360	170	250	42	52
PA 165	450	210	320	65	102
PA 200	540	240	390	80	172
PA 250	690	290	490	100	320
PA 315	870	390	630	125	570

Subject to technical modifications.

ROTATING

Manual Rotary Tables






Manual Rotary Tables

Manual turntables are robust and mounted with cost-effective dial plates. The scope of supply is optional with manual jumper: brake activated by a foot switch, as well as end position switches. For simple applications with a low clock speed, these simplest rotating devices are recommended.



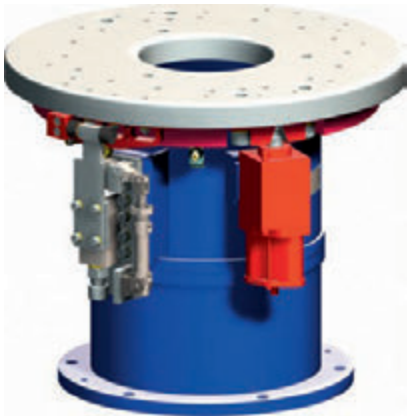

- Robust mounted dial plate, which can be used as a fixture for a manually operated device
- Pneumatic positioning
- Individual height
- Optional with positioning, footswitch activable break, as well as limit switch


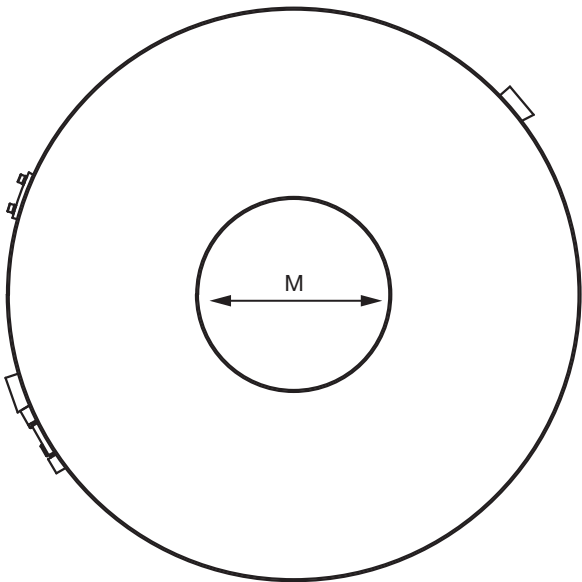


Illustration showing release unit and end position switch

Type	TP turntable plate outside dia. (mm)	M Media access dia. (mm)	H Height (mm)	Weight (kg)
EDM 850	600	200	at least 500	170



Subject to technical modifications.

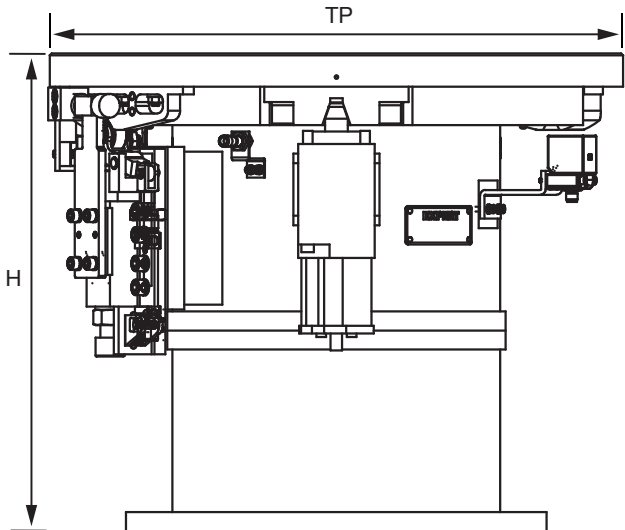

Manual Dial Plate – TXM



- Robust mounted dial plate
- Extremely flat design
- Modular extension: footrests, limit switches, crank handle, dial plate

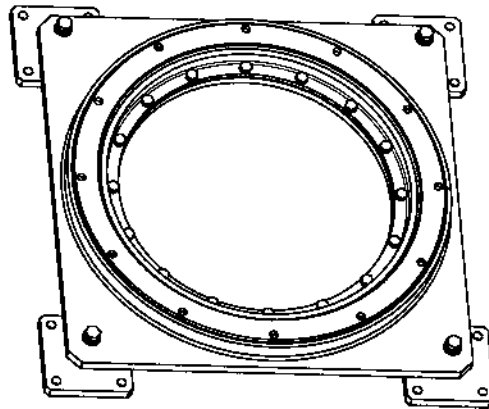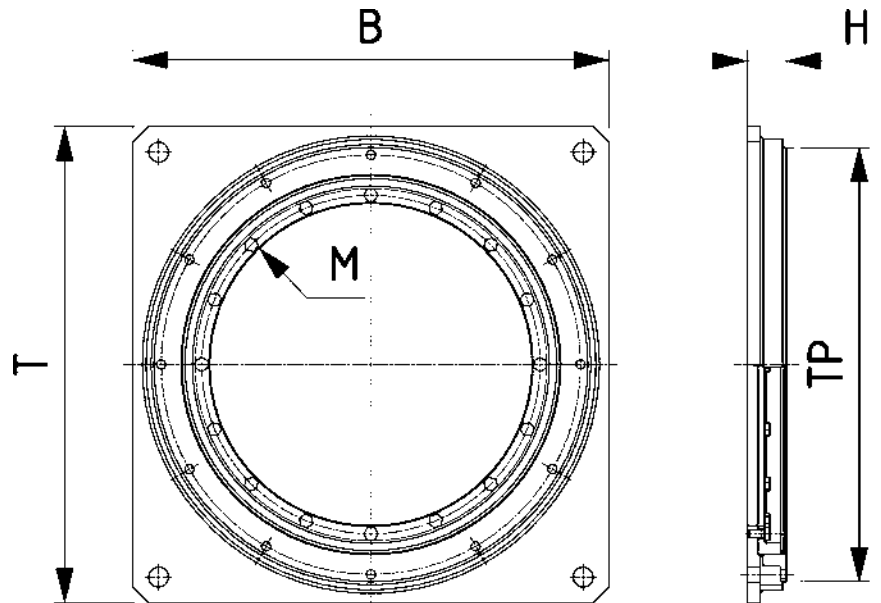

Type	TP turntable plate dia. (mm)	M Media access dia. (mm)	H Overall height (mm)	B Housing width (mm)	T Housing depth (mm)	Weight (kg)
TXM 400	518	300	77	600	600	80
TXM 750	848	630	77	930	930	160
TXM 1100	1198	980	77	1280	1280	250

Subject to technical modifications.

CONVEYING

Fördern



Conveying



Conveyor Technology – the main artery of automated body-in-white

A glance at a production layout reveals that the conveyor lines may be likened to the main arteries of the automation organism, beating in time with each robot cell.

Taking parts A to B – put simply, that is the task of a conveyor system. In the highly-automated car body production systems, conveyor systems are not only a connecting link, at the same time they are also intelligent buffering sections which decouple the individual processes and, in doing so, make them more flexible.

As 'main artery' in the chain of processes, conveyor technology assumes a high degree of responsibility in terms of availability. The malfunction of just one section will have an immediate effect on the total process. For this reason, robustness and a high level of availability are the primary criteria in determining the design of TÜNKERS conveyor technology.

The increasingly flexible nature of body-in-white represents new challenges for conveyor technology. The explosion in the multiplicity of components required for this purpose has also caused overloading of conveyor belt operations, resulting in competition for space. One of the solutions to this problem is the vertical chain conveyor, or paternoster, which makes use of height to buffer the components.

The APM 'Dragon' conveyor is beating a completely new path which, in conjunction with distributor stations, is equalising the entire logistical concept within the production lines by supplying via central workstations. To a certain extent, the TÜNKERS 'Dragon' conveyor embodies functions that, at present, can only be accomplished by complex electrically-operated overhead conveyors.

The current TÜNKERS product range can provide you with a technically tailor-made solution for virtually any conveyor application in body-in-white, as well as for the associated production lines, such as the power train and final assembly.

Accumulating Conveyors




8-5

Indexing Conveyors



8-21

Transfer System



8-29

Belt Conveyors



8-33

Gravity Conveyors



8-39

Heavy-Duty Roller Conveyors




8-41

Container Systems



8-43

Conveying Systems




8-49

CONVEYING

Accumulating Conveyors

- **AFS Accumulating Pallet Conveyors**
- **LFS Belt-driven Pallet Conveyors**





Accumulating Conveyors

Conveying lines with which the component pallet is uncoupled from the drive chain. Regardless of the loading cycle, components can be removed provided that the buffering section is full. From a technical standpoint, there is a difference between conventional chain-driven accumulating conveyors and belt-driven accumulating conveyors for lighter applications. A typical application is the interconnection of production cells.


AFS Accumulating Pallet Conveyors

- Robust pallet conveyor with chain drive
- Max. pallet load (component + carrier) 130 kg
- Suitable for medium- to large-size components up to approx. 3,000 mm wide
- Option: Stop button in the diverter




AFS 90° Accumulating Pallet Conveyors

- 90° transverse conveyor for space-saving transport
- No protective housing required as pallets are only driven with function
- Stop button in the curve from 0 to 180°
- All-round pallet support in Z direction with additional guide rail

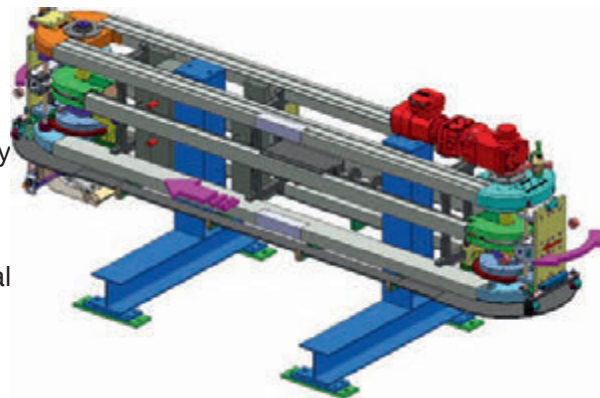


System configuration

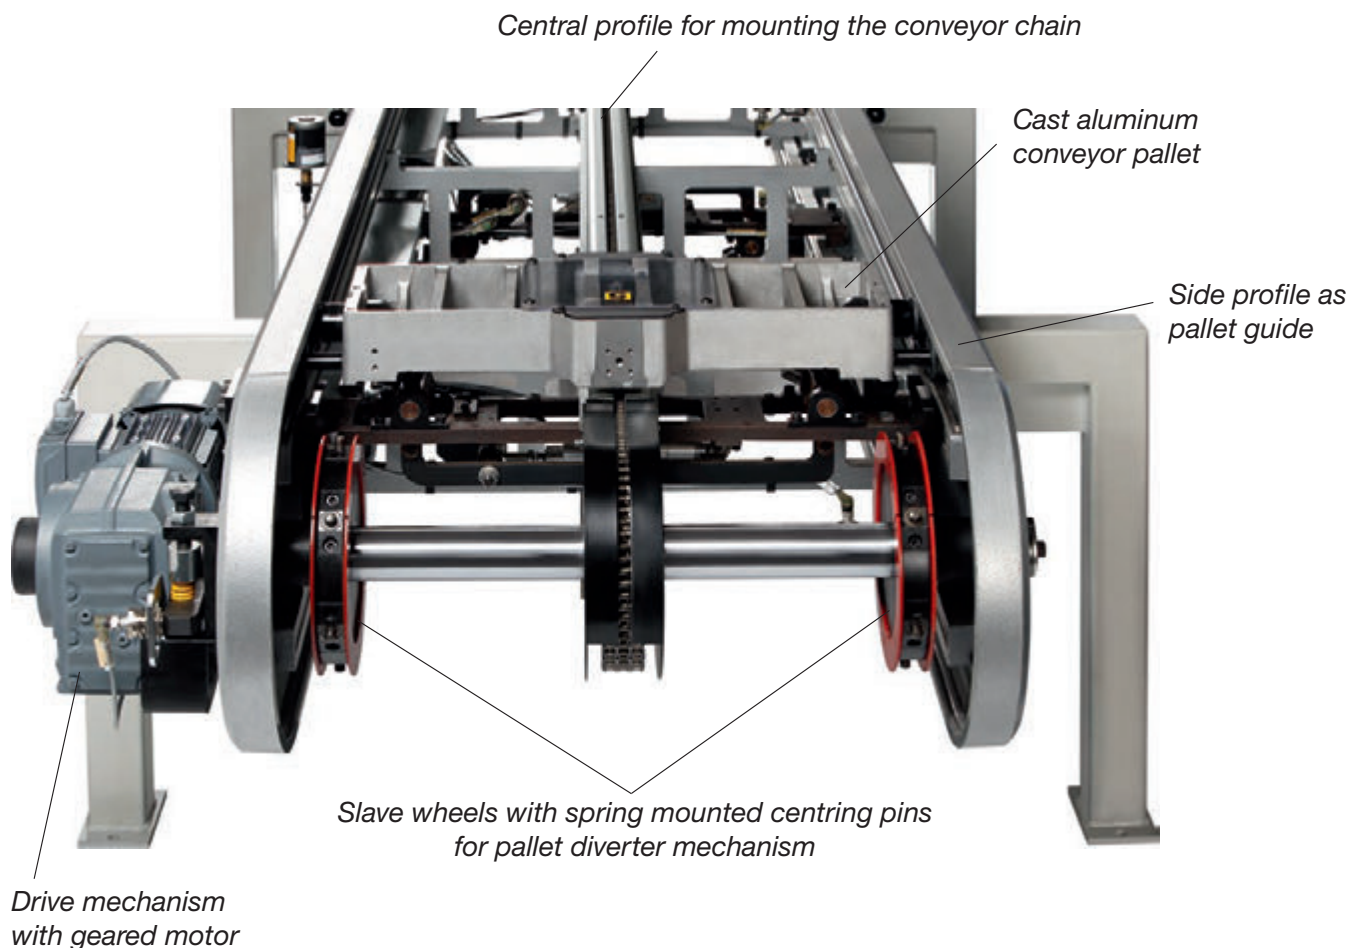

Detail view of the geared motor with overload switch

– If the load torque is exceeded, due to a pallet crash for example, the drive mechanism is switched off.

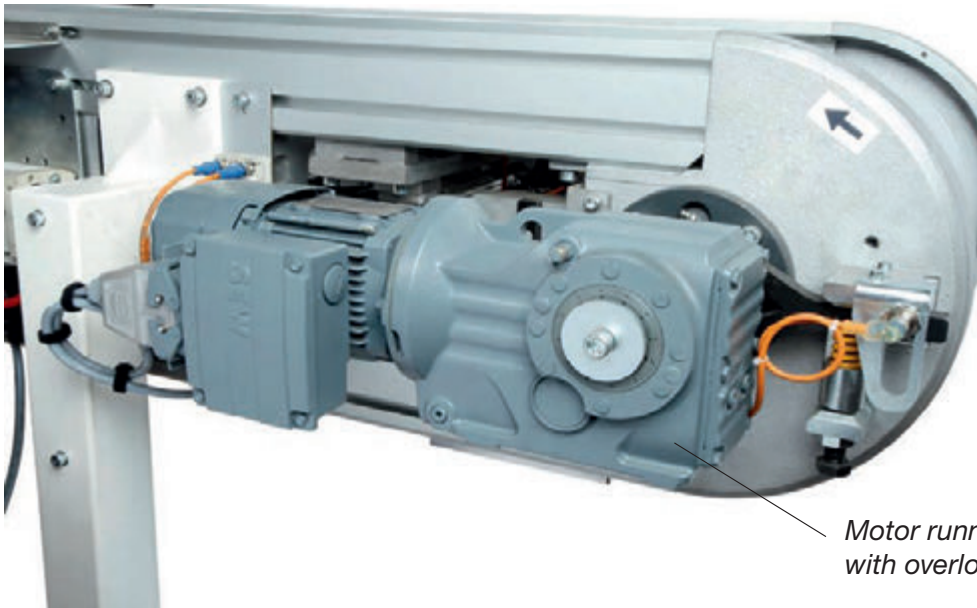

Motor running in torque support bearings with overload switch

Configuration of the conveying pallet

Plastic roller with concave running surface




Steel tube guide rail fitted into the profile



Accumulating Conveyors – AFS System


Maximum load of the component carrier as a function of the pallet spacing

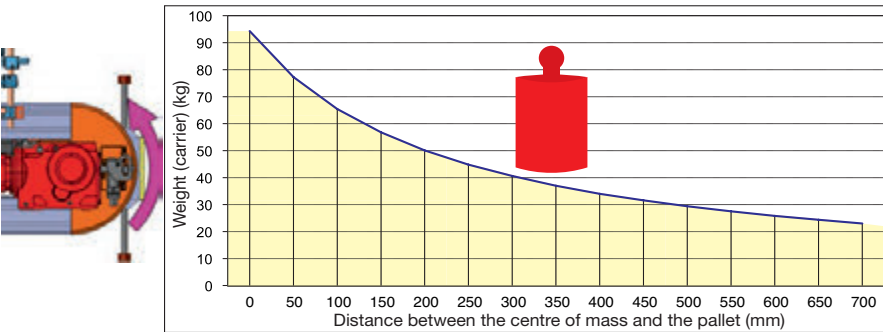

The maximum weight only relates to the component mounting


Accumulating Conveyors – AFS 90° System

Maximum load as a function of the pallet spacing

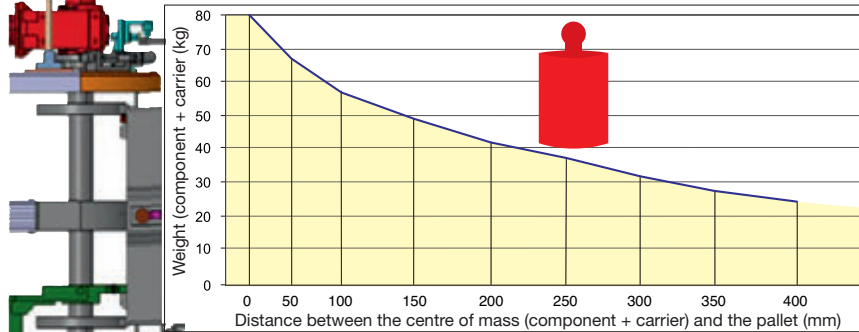

The maximum load is independent of the power output of the motor.
The maximum load is the sum of the component mounting and the component.

Structural Variants: DS Product Range

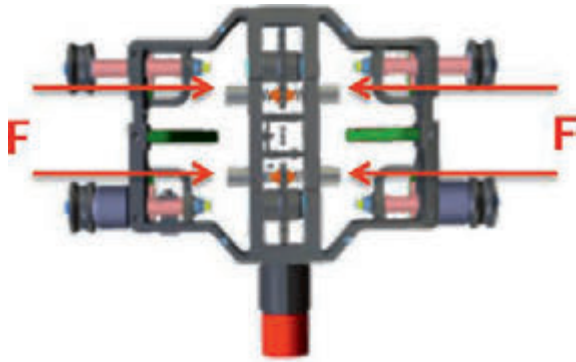


Sum of friction F : $42 \text{ N} \times 1$
instead of $42 \text{ N} \times 5 = 210 \text{ N}$
as is the case with conventional systems

Pallet for the workpiece carrier, with which the friction generated by indexing toward the next pallet in the buffering section is decoupled.

The innovative integral coupling system reduces energy consumption as well as the wear on the friction elements.

Advantages:

- No need for dynamic pressure stoppers
- Reduction of motor power output
- Reduction of friction-related wear
- Reduction in current consumption by the drive mechanism
- Suitable for use in all APM accumulating conveyor systems

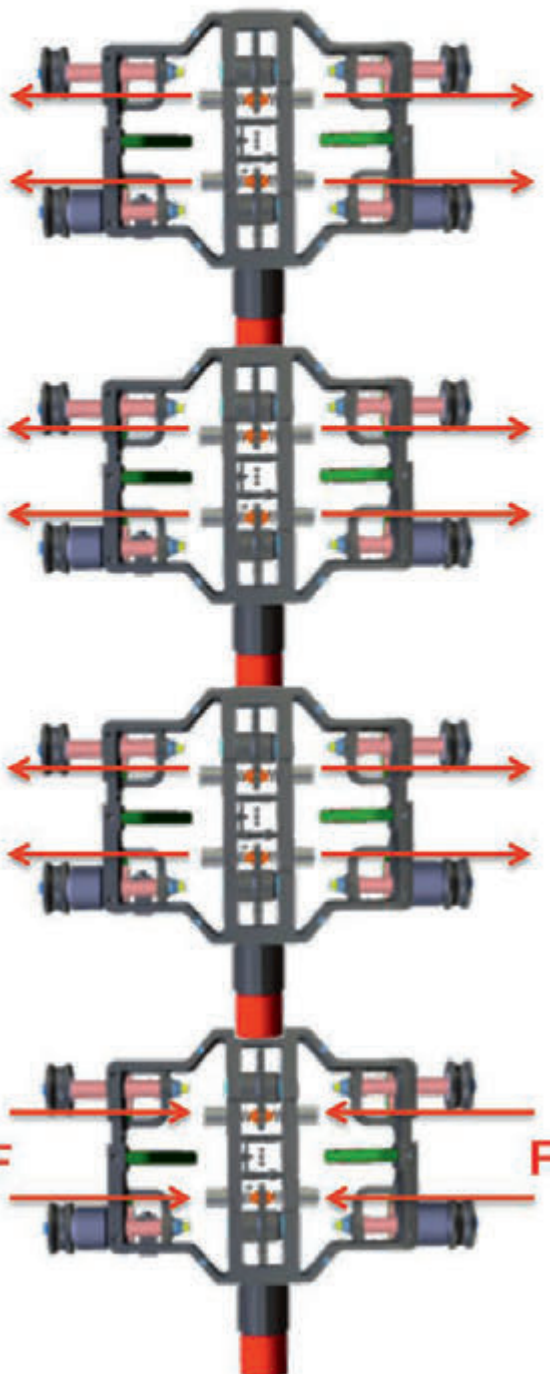


Structural Variants: Compressed Air-free Belt-driven Conveyors



Accumulating conveyor in which the usual compressed air-powered elements are replaced by electric drive mechanisms.

Characteristics

- Unaltered drive motor with 400 V AC power supply
- All other actuators, stoppers/fine positioning units with 24 V DC power supply
- Central motor module TMI8 or modular TDM1 elements replace valve module

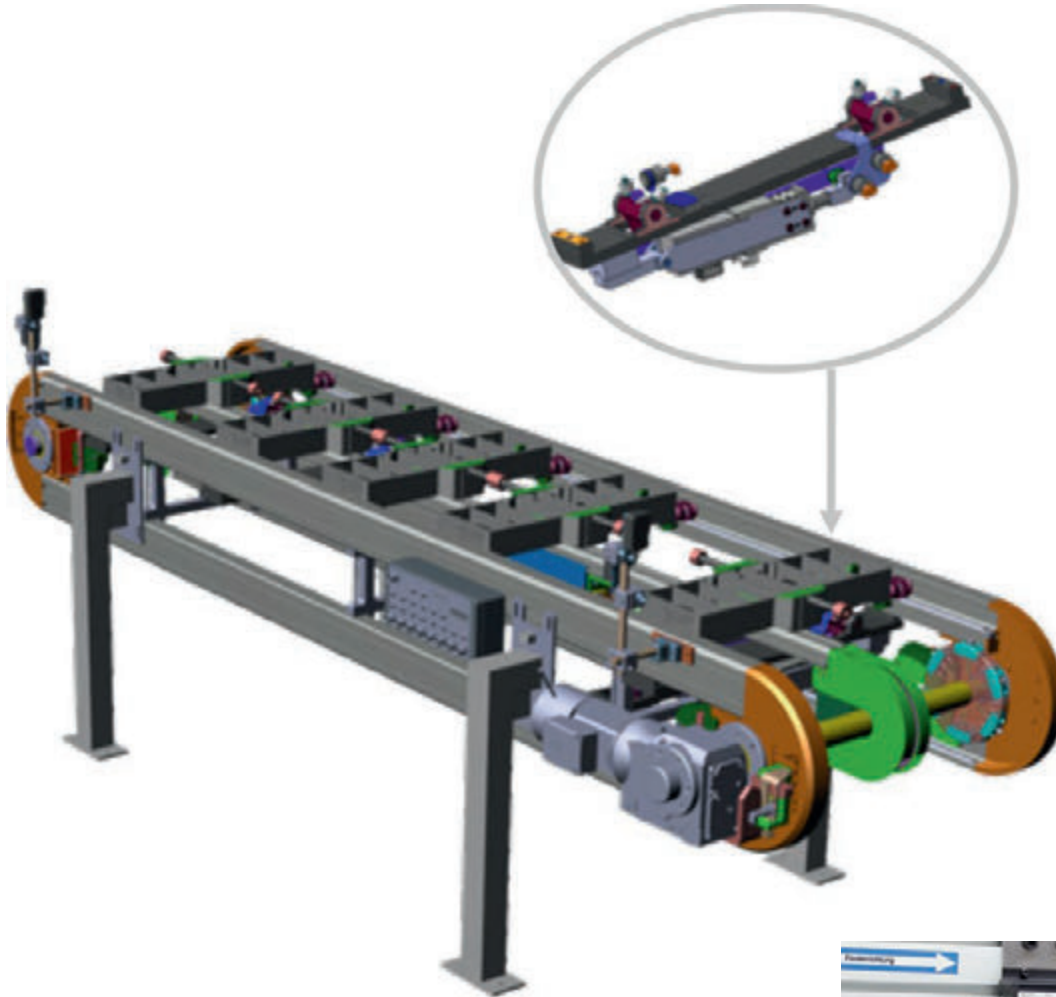



Motor control module
TMI8



Structural Variants: XXL Belt-driven Conveyors

The AFS conveyor in XXL form with dual speeds, facilitated by independent modular sections. Configuration lengths up to 100 m.



- Different speeds are possible in each zone.
- With a higher speed in the middle segment, it is possible to span large sections in a short time.

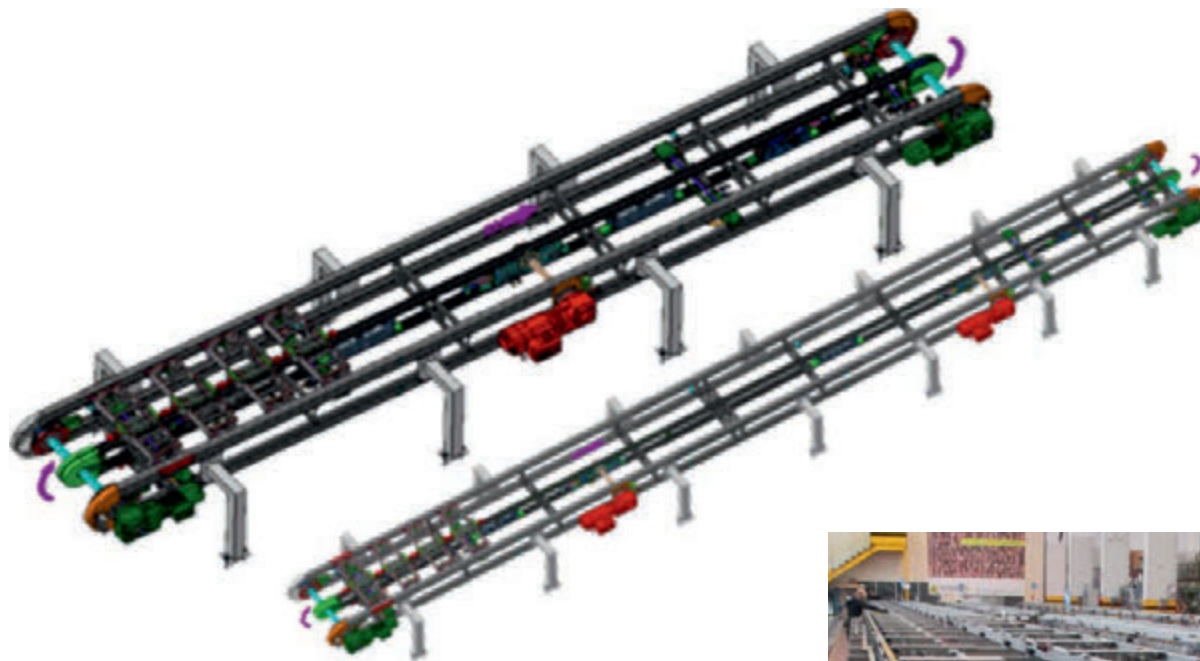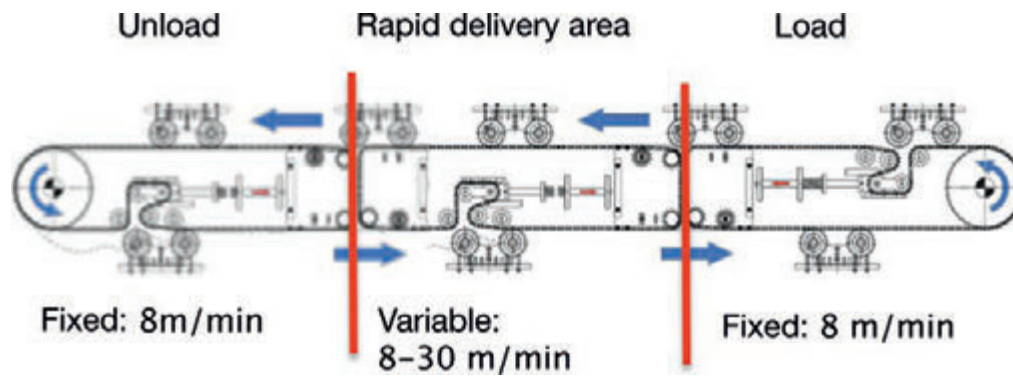

Curved Conveyor

New module for the AFS 90° Accumulating Conveyors in the form of a curved element.

- The new curved module allows the layout of current production systems to be arranged in a more efficient manner while making the best use of space in the production cells
- The technique is broadly based, without changes, on the proven AFS 90° Accumulating Conveyor elements

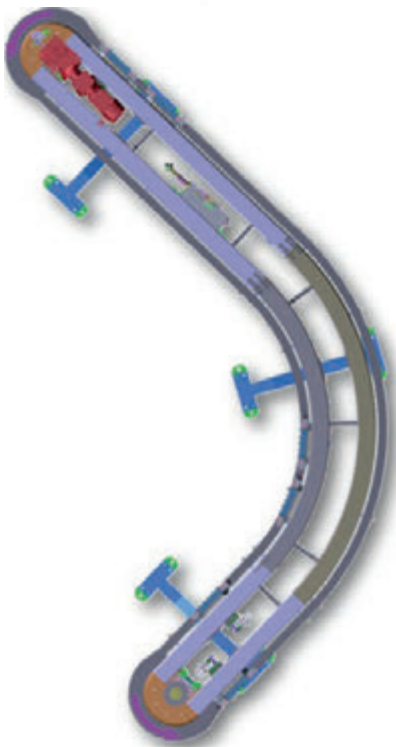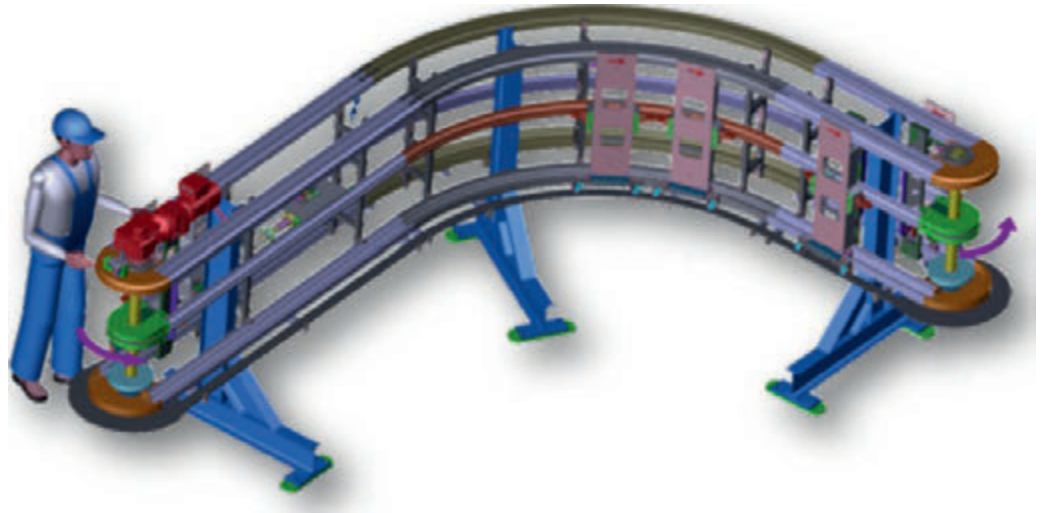

Basic data

- Maximum length of the pallets in the feed direction: 350 mm
- Operator-safe diverting possible
- Stop in the curve possible

Typical applications



AFS 90° Conveyor for transporting rear floor pan

AFS Conveyor as infeed conveyor in a production cell with protective housing




AFS 90° Conveyor as manual loading station for longitudinal parts




LFS Belt-driven Pallet Conveyors

- Compact belt-driven conveyor
- Max. pallet load (component + carrier): 60 kg
- Suitable for smaller to medium-sized components up to approx. 1,500 mm width
- Operator protection as standard, since there is no positive fit between the belt and the pallet
- Can be loaded from the front, as a protective housing is not required

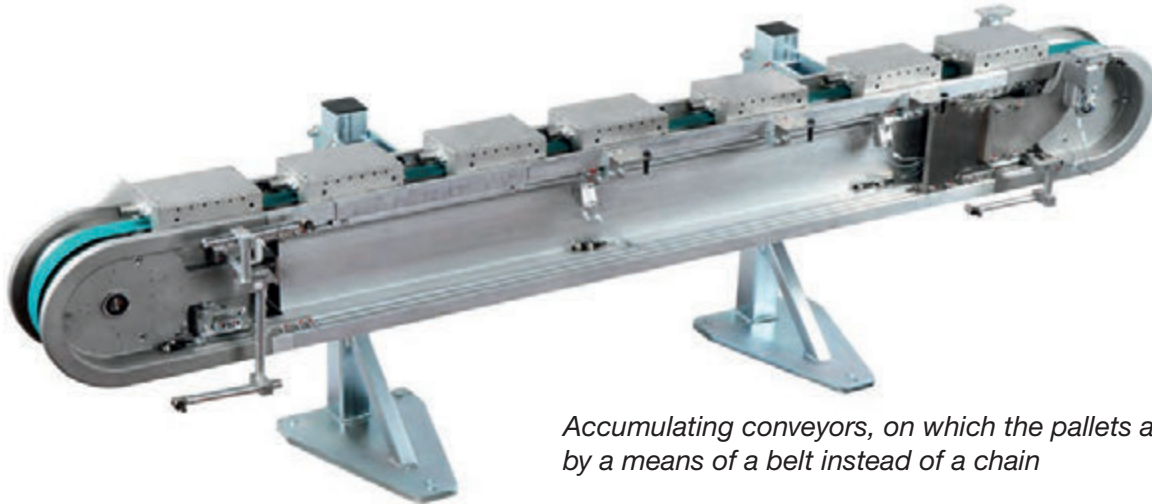


Accumulating conveyors, on which the pallets are transported by a means of a belt instead of a chain

System configuration

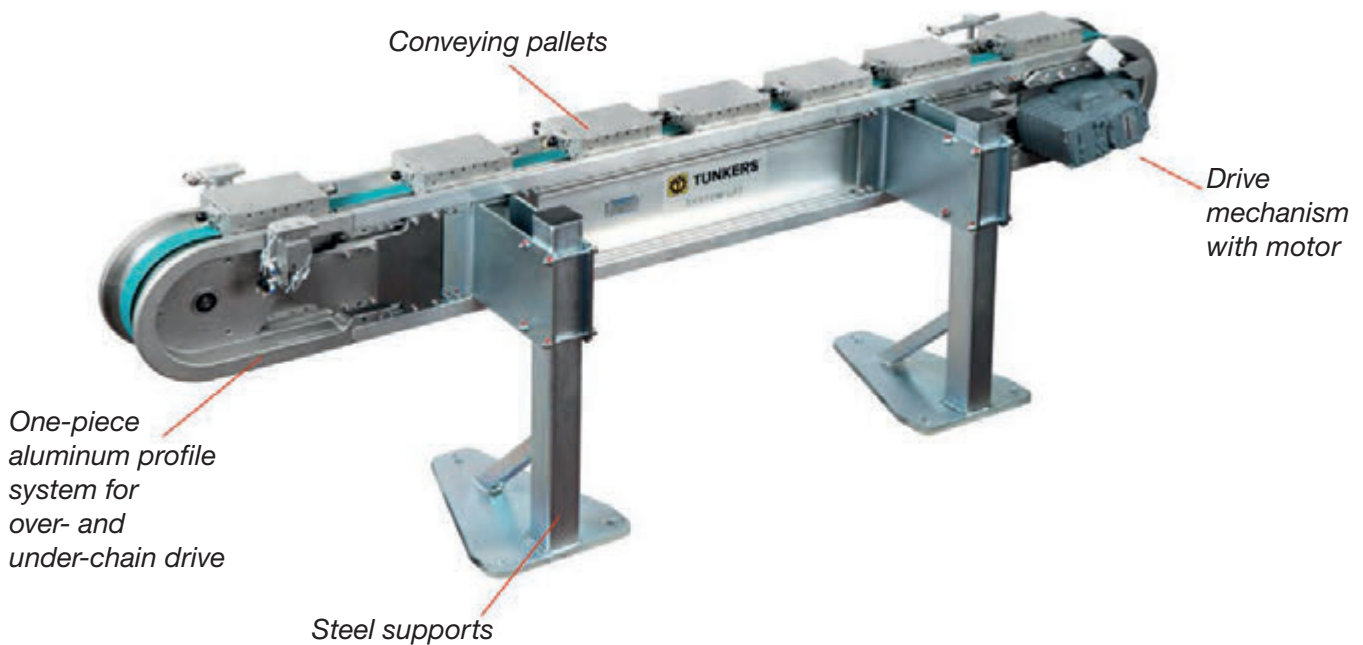


Advantage 1: Operator protection as standard

- In contrast to conventional accumulating conveyors, the pallets are transported by means of a belt
→ friction fit instead of positive fit.
- In the diverter, the friction fit precisely matches the weight of the pallet and the workpiece carrier.
- As a result, the pallet can be stopped by the operator in any position.
- Special safety devices, such as housings, light curtains or pressure mats, are not required.

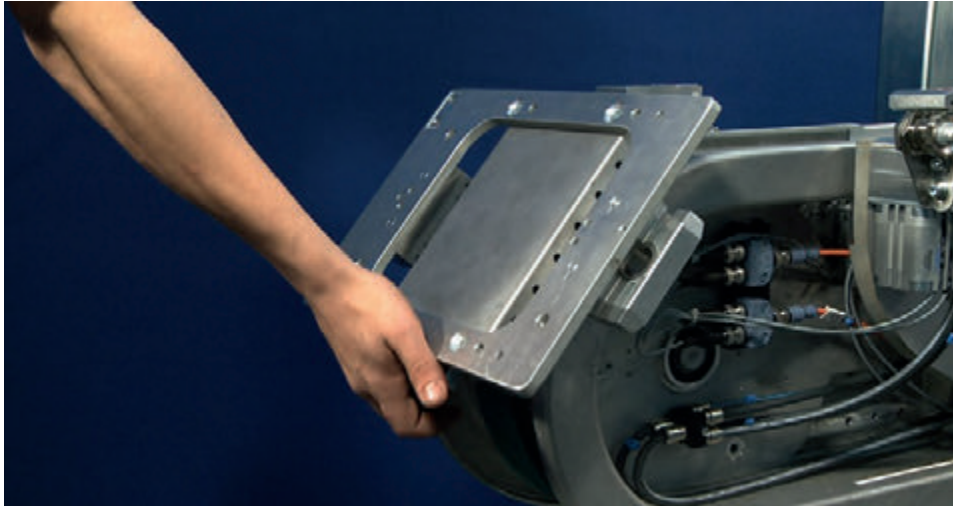


Front-loading, as a protective housing is superfluous

- Loading from the side

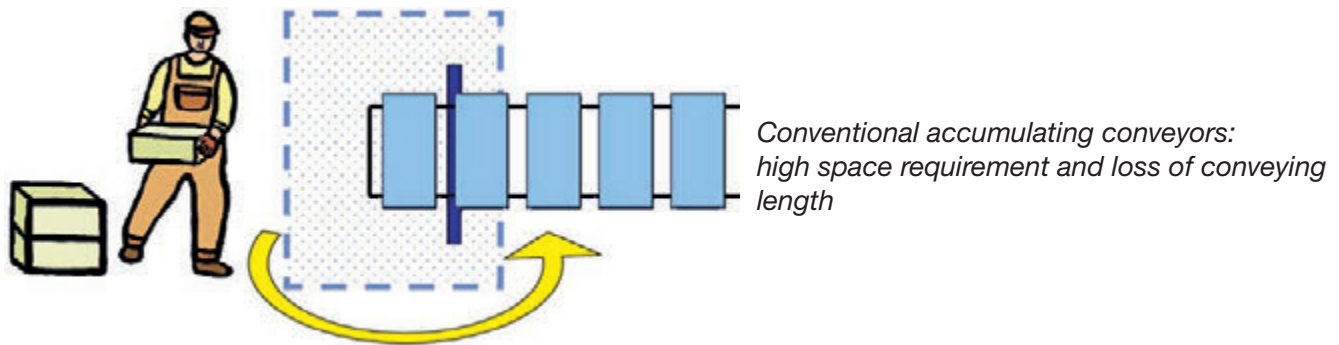

- Loading from the front

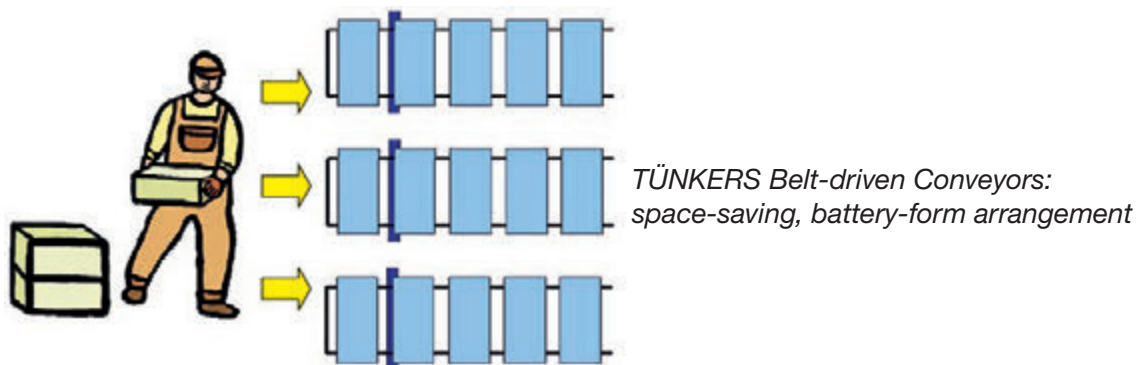


Advantage 2: Minimal energy requirements

– Conventional accumulating conveyors: energy wasters!

Each pallet is equipped with a friction device. The output from the motor must be compatible with the sum of the pallet friction devices accumulating before the stop positions.

- With TÜNKERS Belt-driven Conveyors, as they accumulate, the pallets are mechanically decoupled from the belt, while only one remains in friction contact at each stop point.
- Motor configuration
 - = one type of motor for every application (approx. 180 Watt)
- No dynamic pressure stopper required
- No limit to the length of the queue

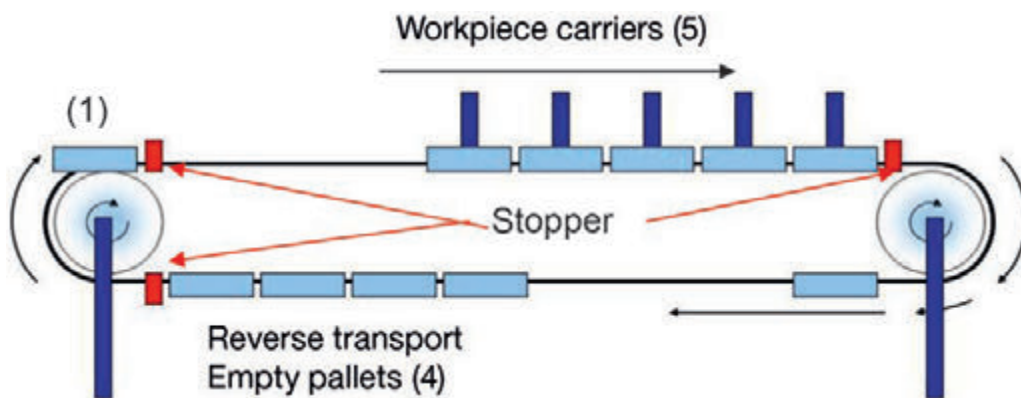


Patented pallet decoupling system

(Patented by Leiritz Automation Tools)


Working principle:

- Using a spring-loaded mechanism, the pallet is clamped against the belt
- Friction fit, not form fit
- The clamping mechanism can be released by pressing the decoupling knob

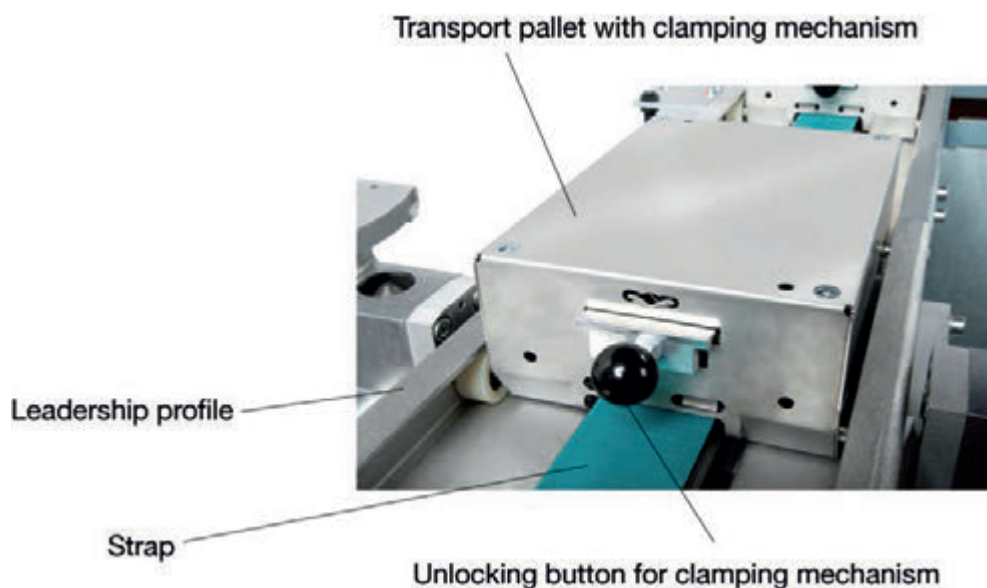


Belt-driven Accumulating Conveyors – LFS System

Maximum load of the component carrier as a function of the pallet spacing

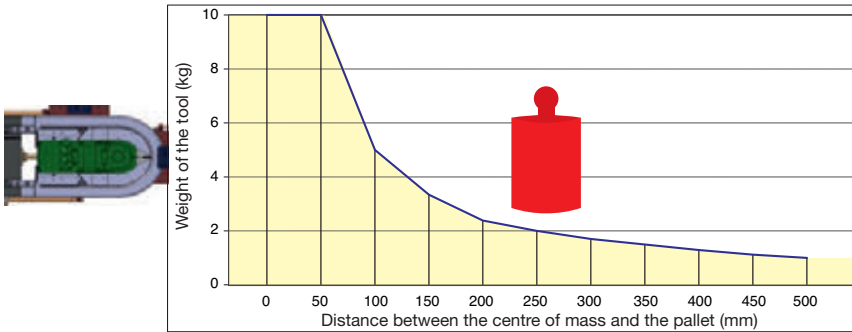

Belt-driven Accumulating Conveyors – LFS 90° System

Maximum load of the carrier and the component as a function of the pallet spacing

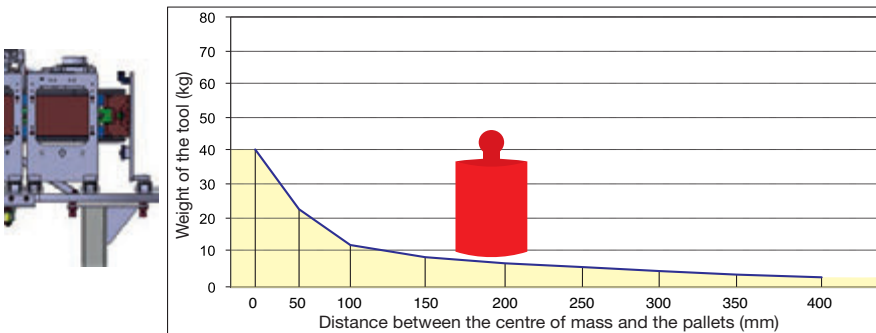

Typical applications



Multi-chain system with front loading




Conveying latch storage systems for multiple placement



'Double-decker' in the configuration phase



Front end infeed with lateral support

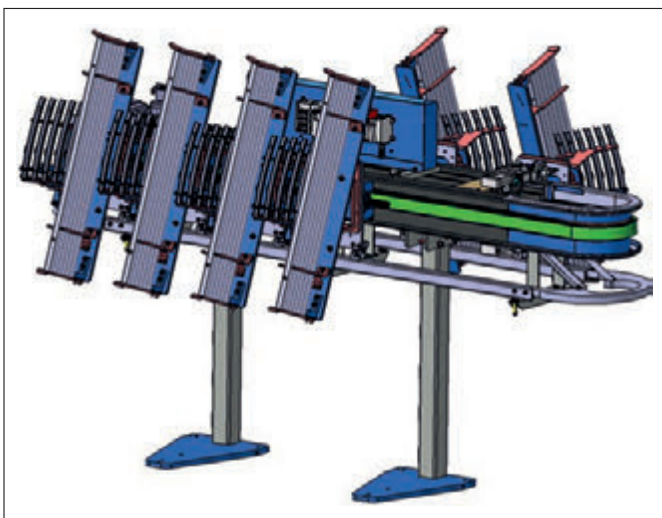


LFS 90° conveyor with pallets arranged transversely

CONVEYING

Indexing Conveyors

- **AFT Indexing Chain Conveyors**
- **AFTV Vertical Chain Conveyors**
- **AFP Paternosters**






Indexing Conveyors

Conveyor systems in which the pallets or the component carriers are fixed to the drive chain or drive belt. Loading and unloading operations are performed in fixed, linked cycles. By virtue of the system, if the loading or removal station is shut down, the flow of components is interrupted.

System configuration

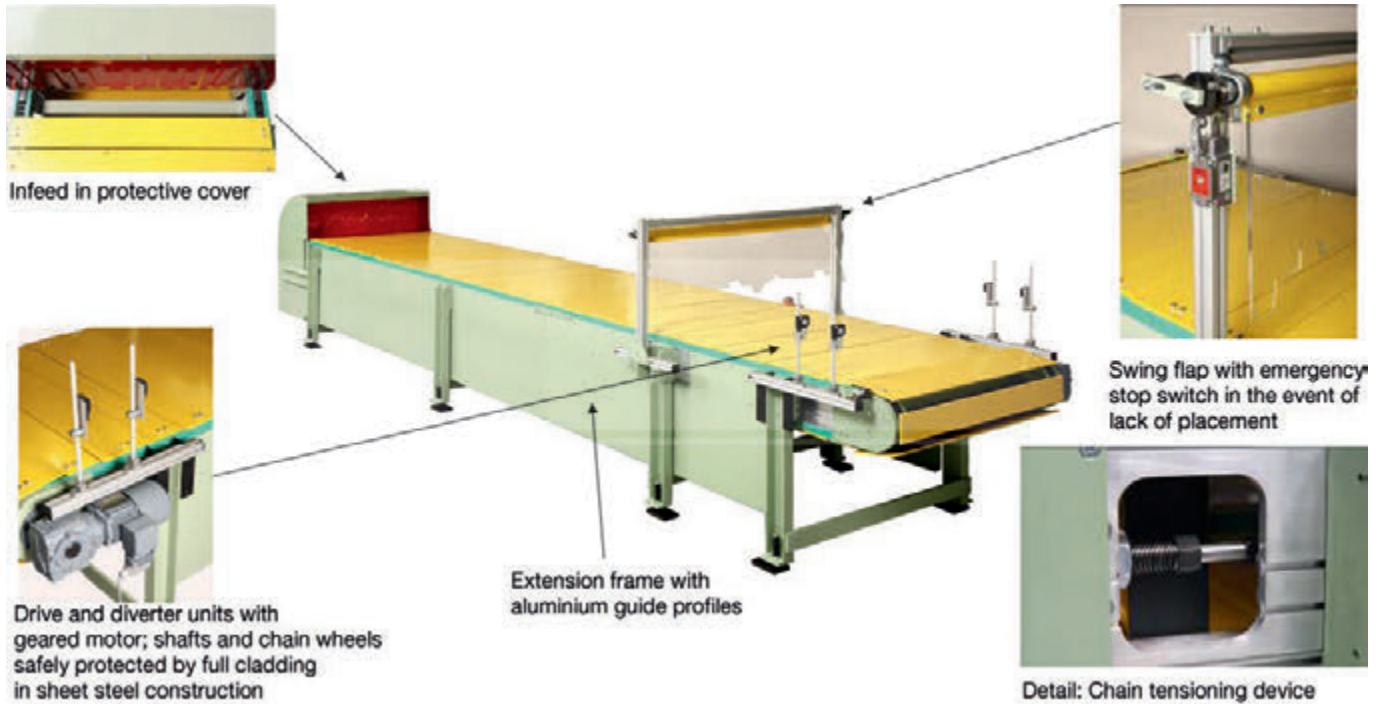


Options

- Overhead transport
- Sideways transport
- Personal protection devices, such as housings, light curtains or pressure mats, as required
- Swing flap for protection against lack of placement
- Sensors for component and workpiece carrier detection
- Workpiece carrier aligned with the configuration of the tool geometry

Indexing conveyors – AFT System


Maximum load of the component carrier as a function of the pallet spacing

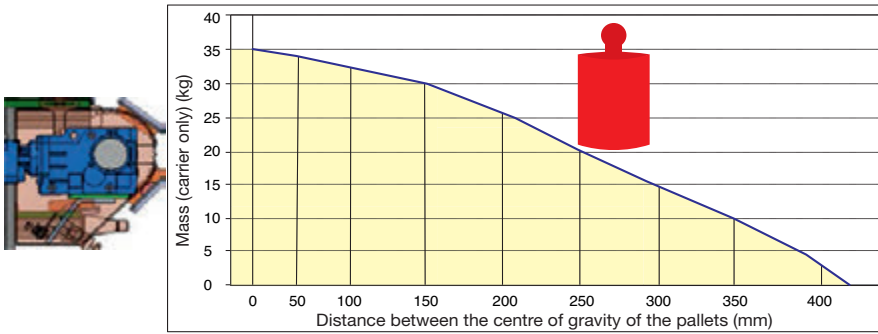

The maximum weight only relates to the component mounting.


Indexing conveyors – AFT 90° System

Maximum load of the carrier and the component as a function of the pallet spacing

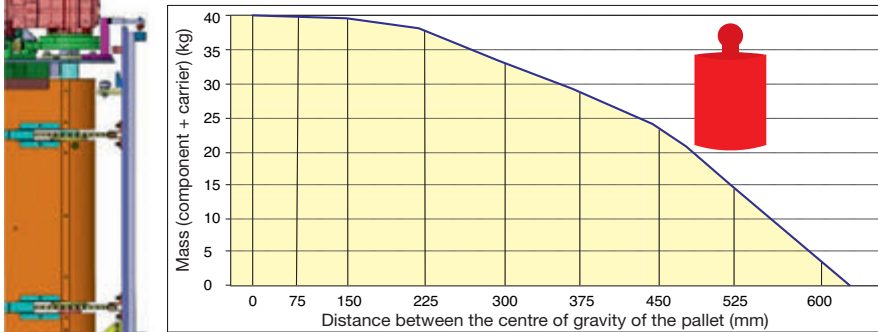


With the 90° System, the maximum load is the sum of the component mounting and the component.
The maximum load is independent of the power output of the motor.

Typical applications

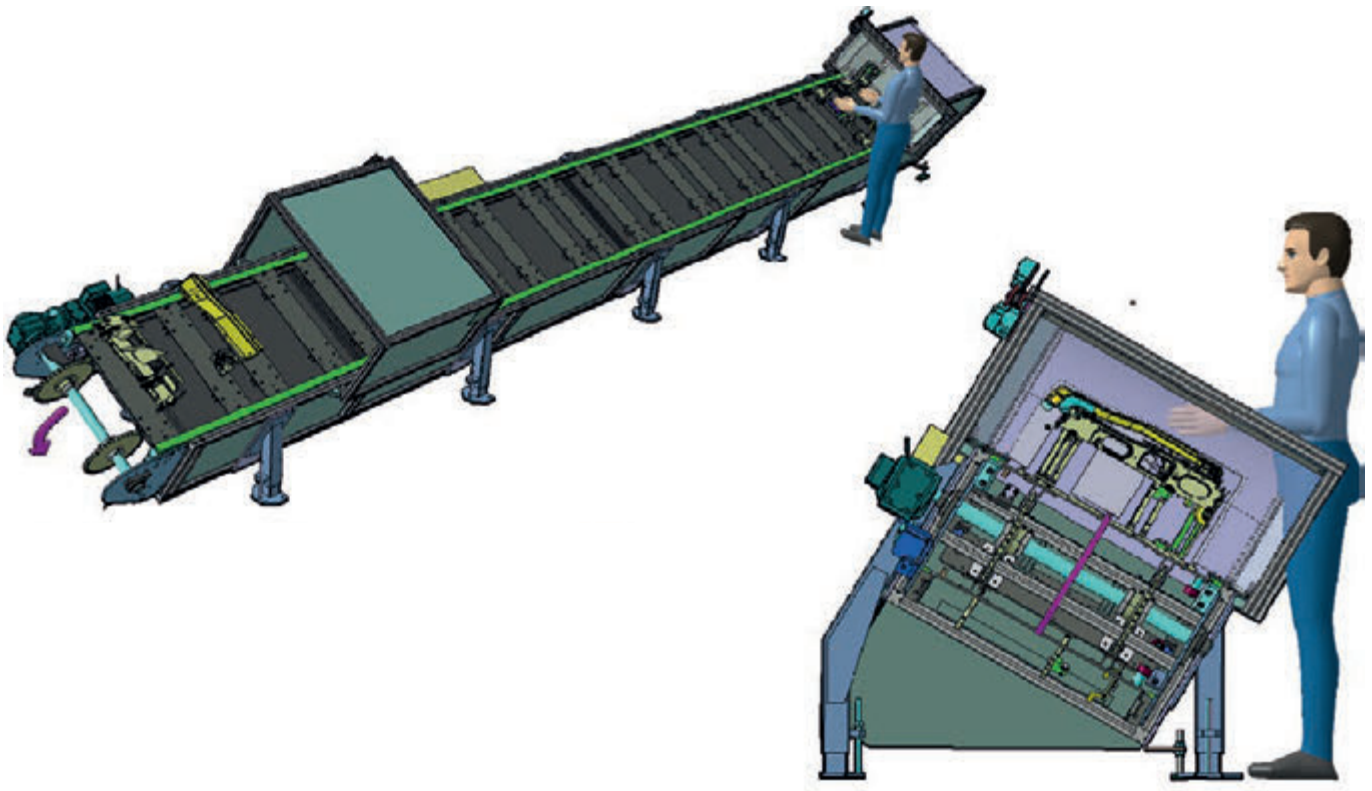

Chain conveyor in ergonomic inclined position

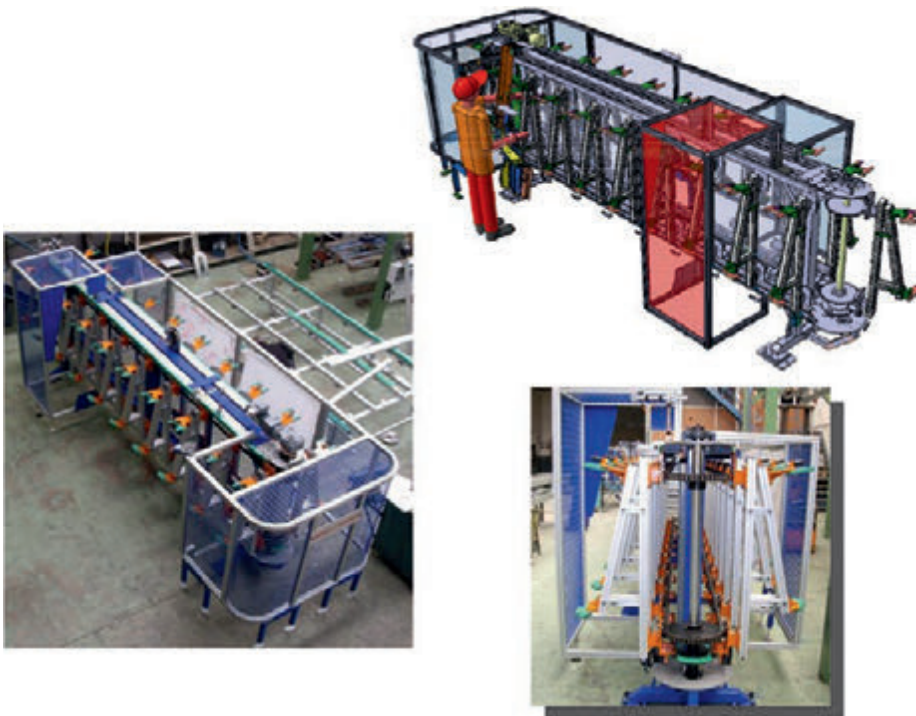


90° chain conveyor for side loading by the operator

AFTV Vertical Chain Conveyors


Conveyors which, where space is confined, are able to efficiently transport specialised long components in an upright position

- Pallet guide via a single roller belt
- Chain conveyor in upright configuration
- Robust welded steel framework
- Max. component width 2,000 mm
- Max. component weight 10 kg
- Option: Paternoster system with component carrier in free-floating 'gondola arrangement'


System configuration

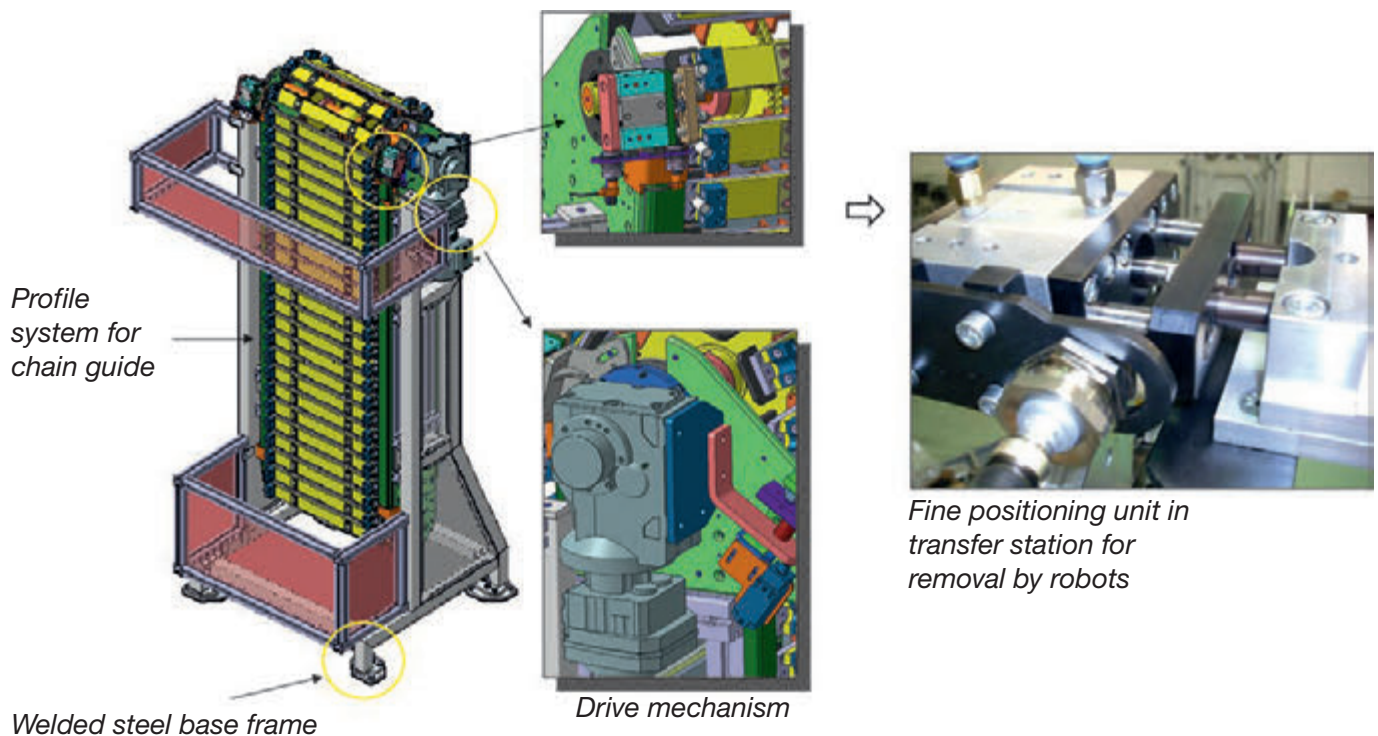


Typical applications

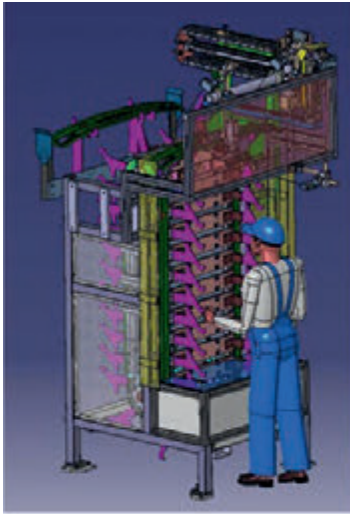


Front view

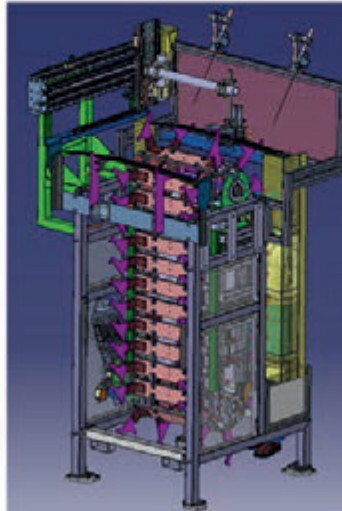


Rear view

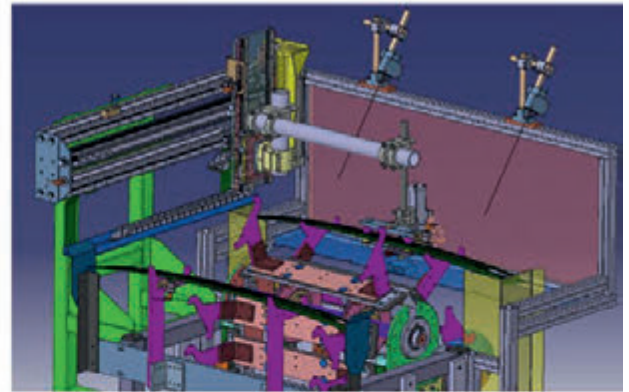

Detail view of the handling system
for component removal and
transfer to the robots


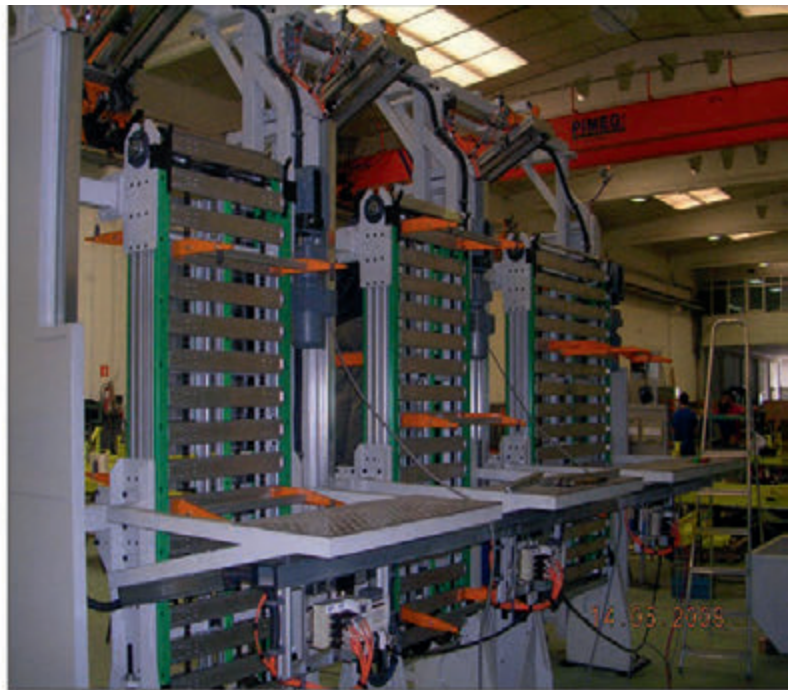


AFP Paternoster, APM Systems System configuration

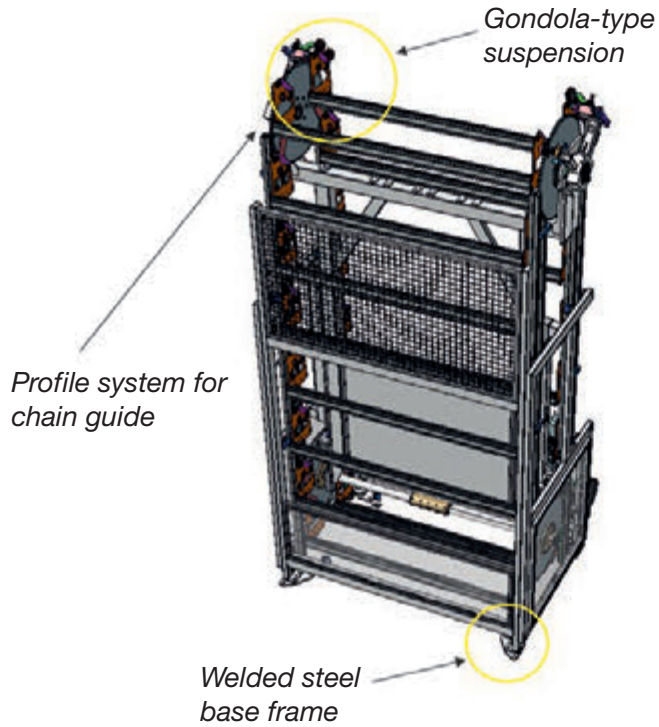


System in the configuration phase

Typical applications

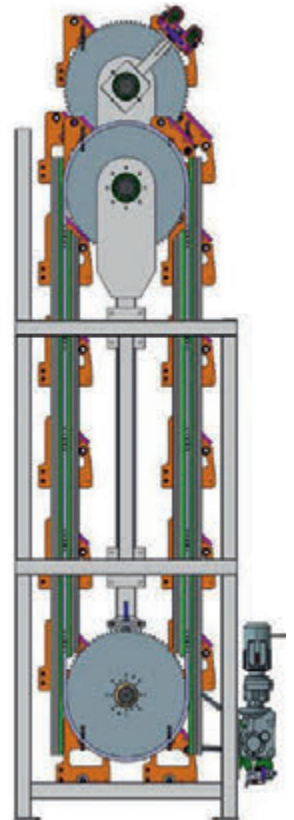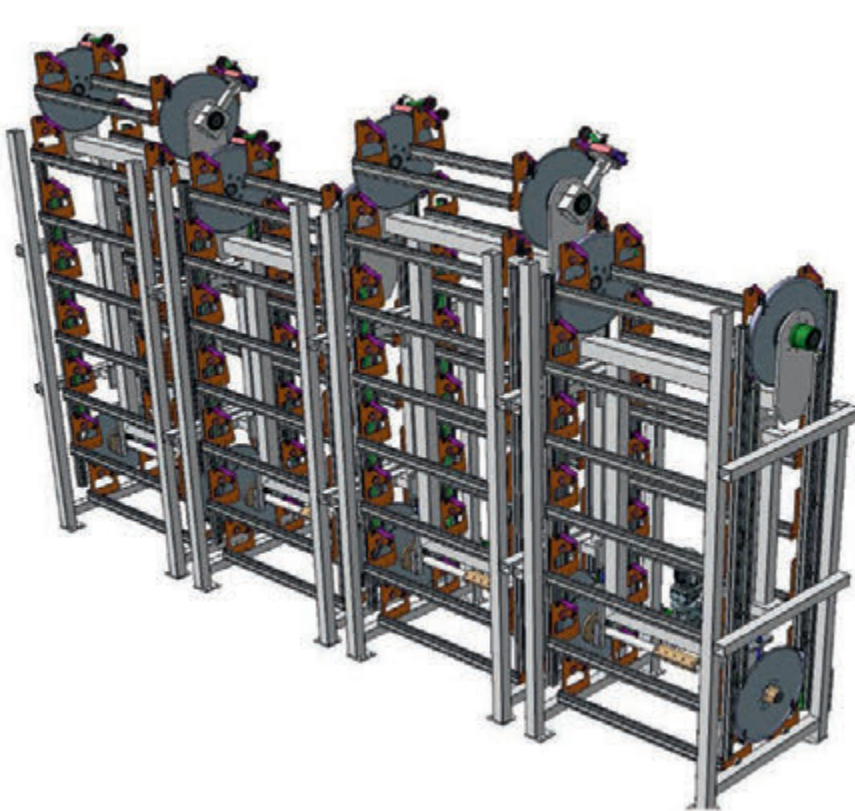

CONVEYING

Transfer System





Transfer System

Transfer Systems are conveying units that are used to convey components on carrier systems over long distances. In contrast to accumulating conveyors, an active role is not played by the buffers but by rapid transport from A to B. A typical application for transfer systems is bridging longer paths between two physically separated processing lines.


ATS Transfer System

- Systems for the rapid conveying of components (at 2 metres per second) over sections ranging from 10 to 30 metres
- Compact rolling carriages for component products up to 250 kg
- Powered by low-wear belt-drive mechanism
- Fine positioning with locking unit in the end positions




APM Transfer System

High speed shuttle system for heavy components

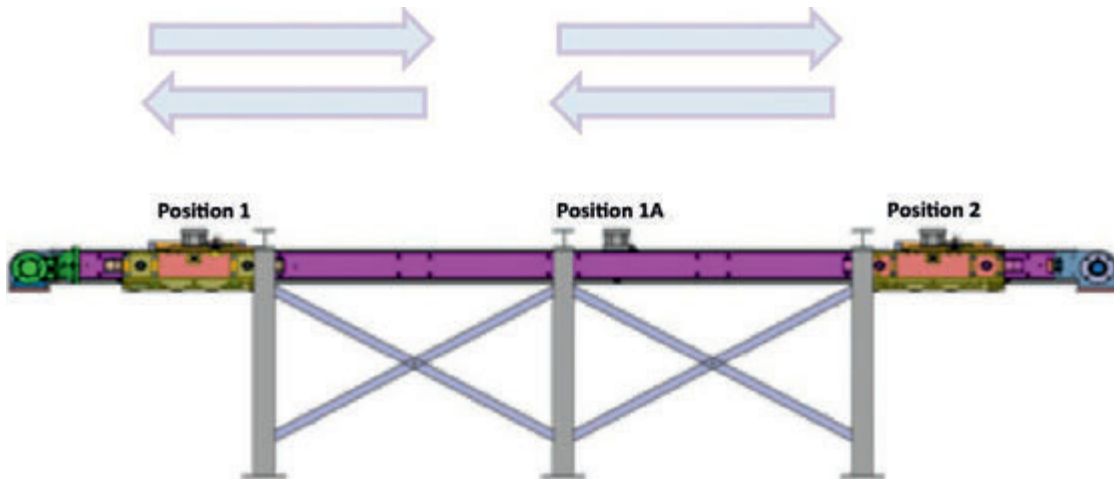


- Cantilever steel construction
- Low-wear belt drive mechanism
- Fine positioning using limit switches and fixed limit stop

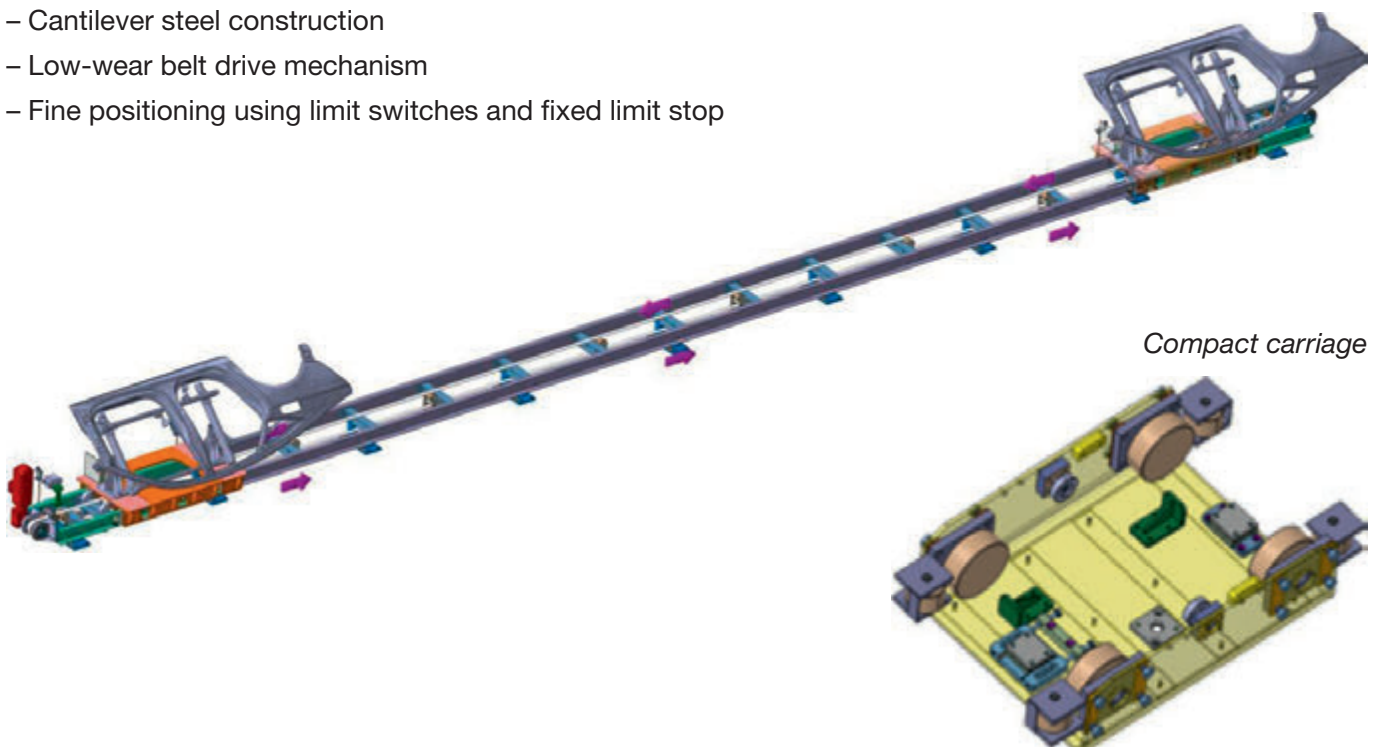

CONVEYING

Belt-driven Conveyors







Belt-driven Conveyors


In applications for Body-in-white automation, for preference belt-driven conveyors are used for the removal of car bodywork components. The onward transfer of small parts from the robot cell - for possible reworking for example – is a typical application. However, the belt-driven conveyor is also a simple and cost-effective solution in the form of a buffer conveyor for manual removal and onward transport.

EFG Belt-driven Conveyors

- Robust basic chassis consisting of aluminum profiles
- Max. belt width approx. 2,000 mm
- Max. belt length approx. 20 m
- Option: dual belt for special component geometries
- Conveyor speed 1.5 to 10 metres per minute

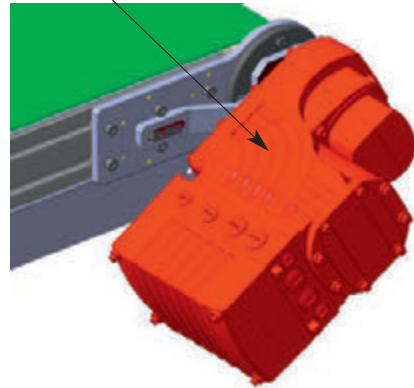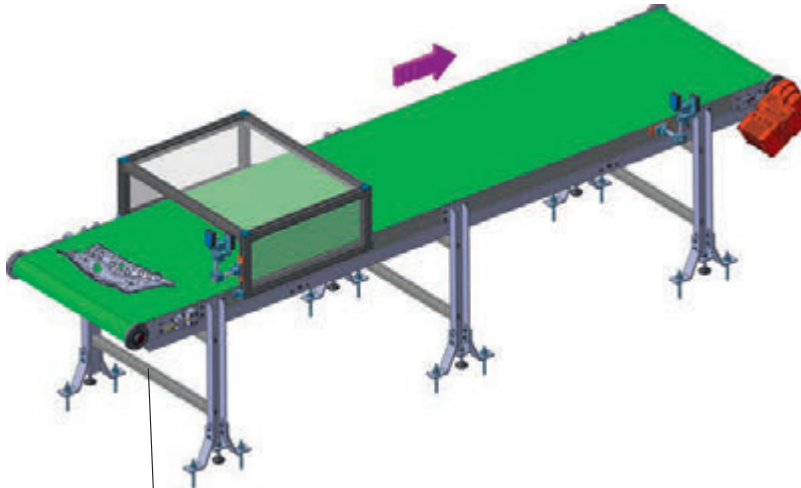

Detail view of the motor mounting

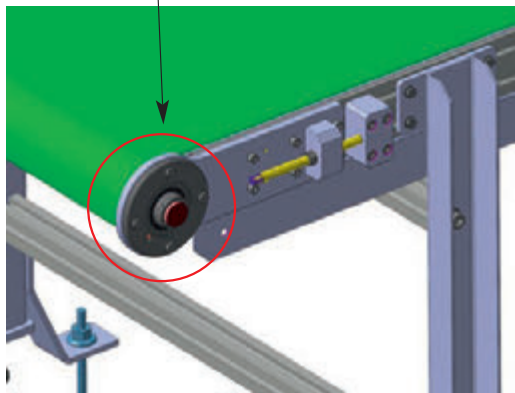


Detail view of the belt tensioning device

Special configuration: Dual Belt




- Flexible, modular adjustment of the conveyor chains based on the component geometry
- Chains synchronised by means of transmission shaft: alternatively, with twin motor concept, by frequency converter
- Conveyor speed adjustable from 0.5 to 10 metres per minute

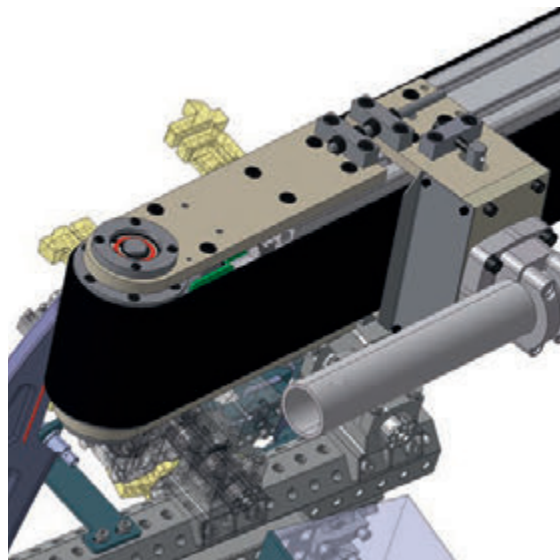

Detail view of the belt tensioning device


Typical applications

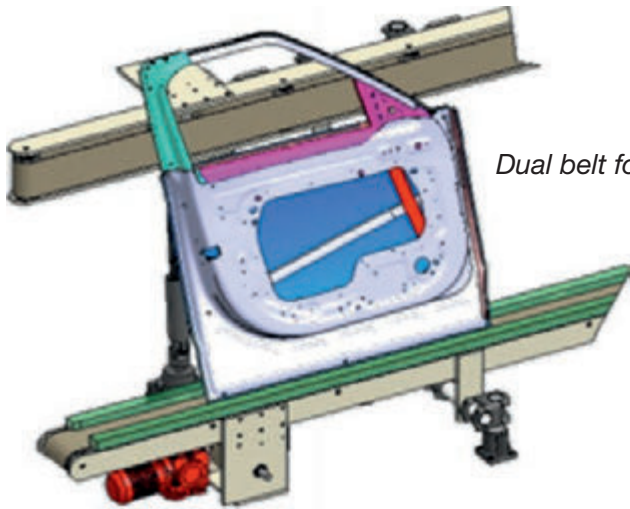

Dual belt for transporting a car door




Inclined conveyor

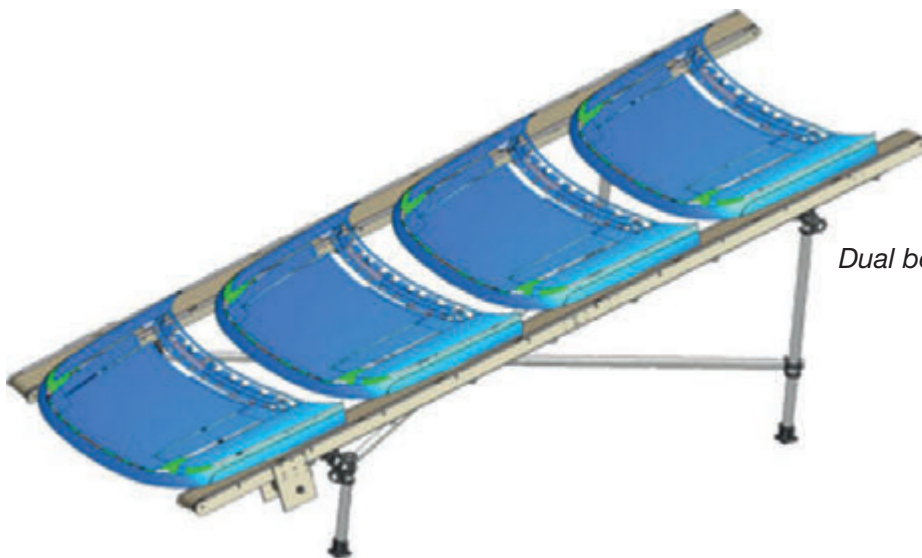

Dual belt for transporting a car bonnet


CONVEYING

Gravity Conveyors




Gravity-driven Bin Conveyor

- Bin adjustment without drive mechanism
- Single infeed using rollers/gravity principle
- Base frame either in steel frame construction or with modular profile system
- Integral return guide
- Precise positioning with TÜNKERS clamping components

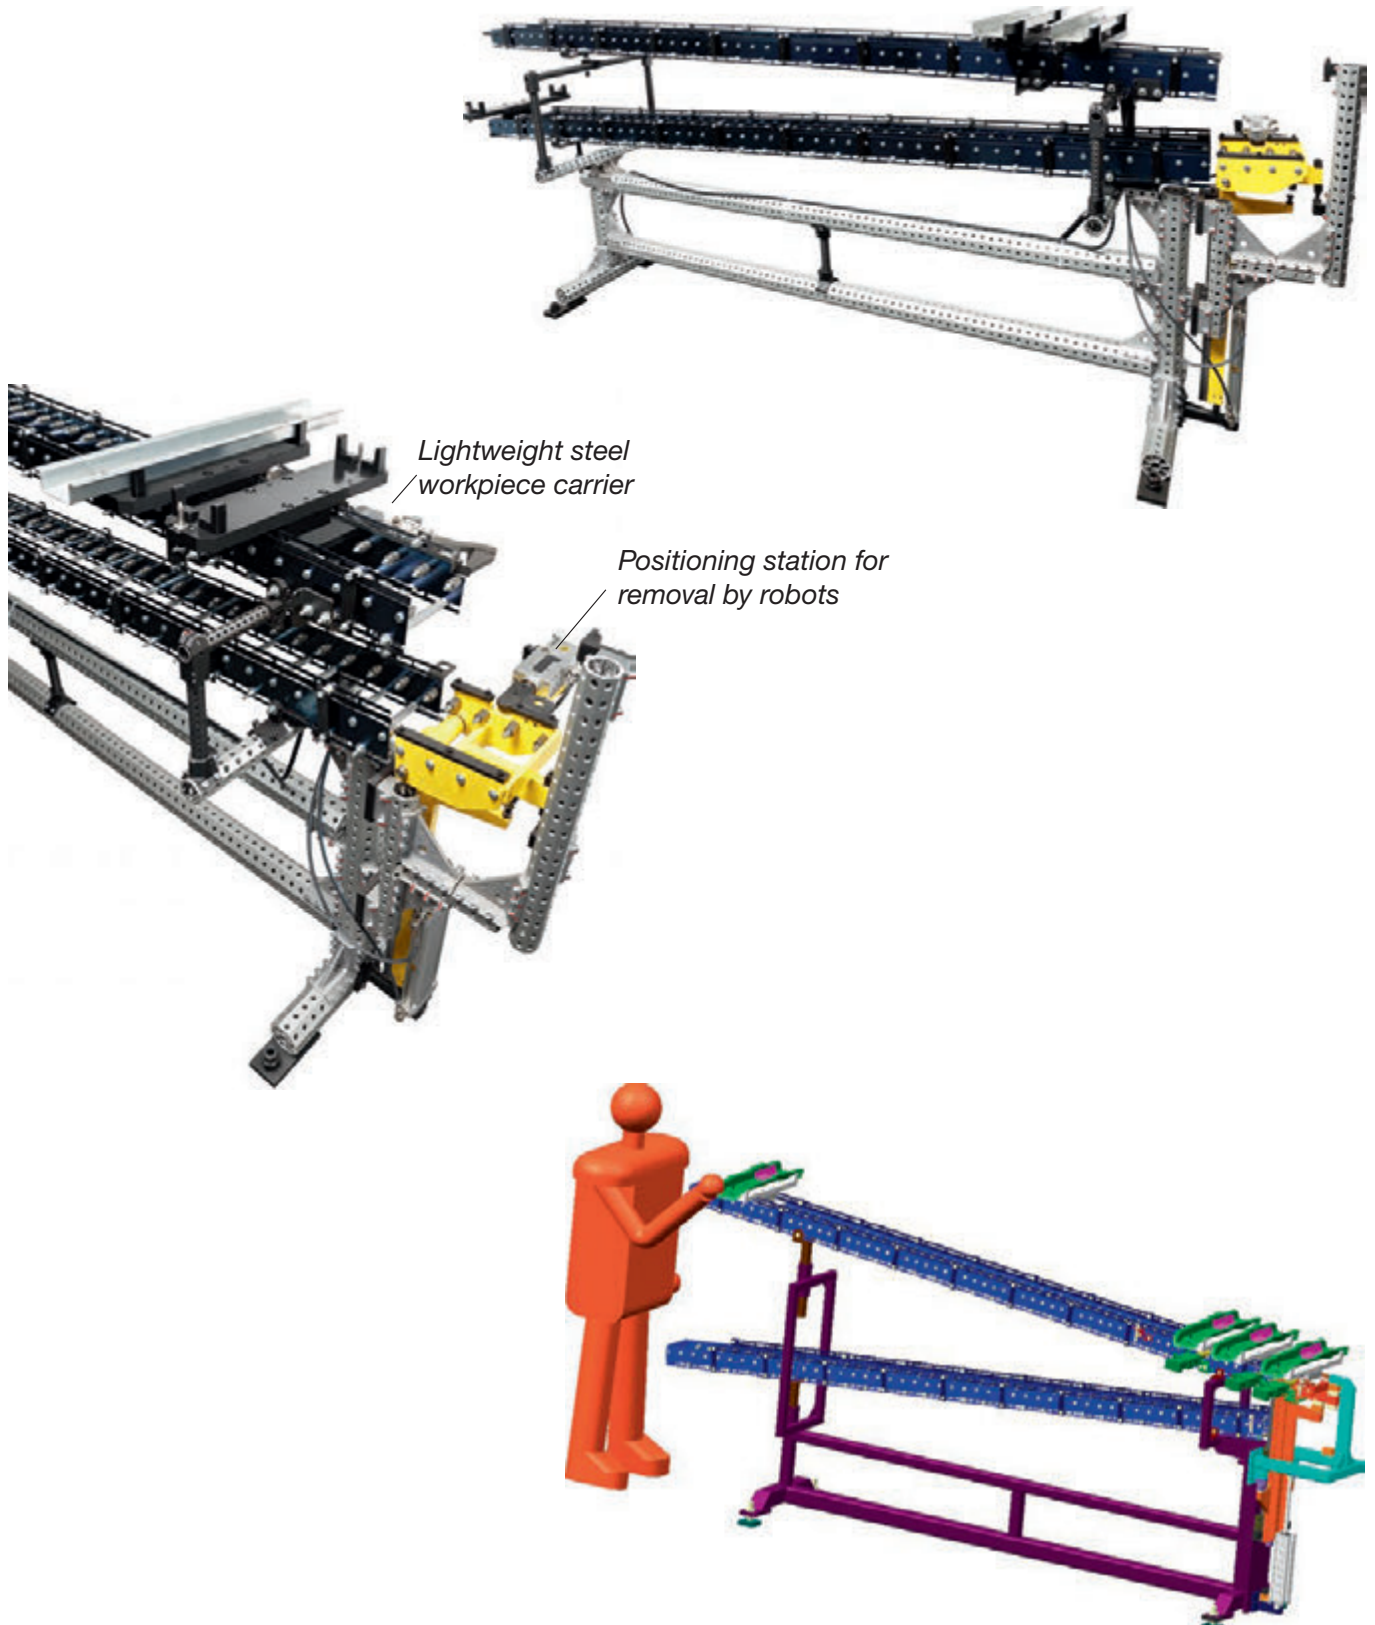

CONVEYING

Heavy-duty Roller Conveyors




Heavy-duty Roller Conveyors



- Roller conveyor for loads up to 1,000 kg
- Roller drive via central chain strand
- Single-motor concept – one motor powers the entire conveying strand
- Each roller features the power-free function via a separate friction coupling

System configuration


Sheet steel framework, in which the central chain drives the rollers via individual friction derivatives

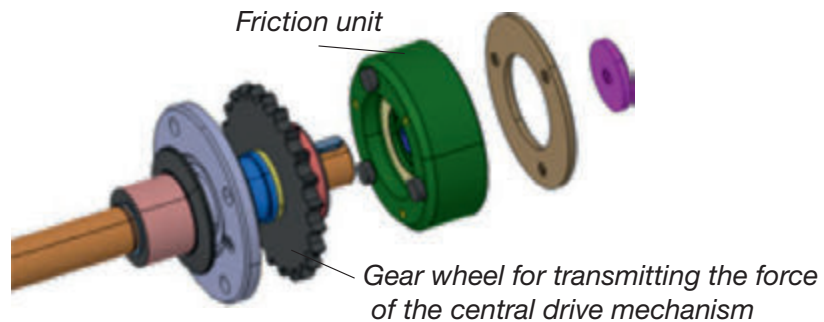

Typical applications



Heavy-duty conveyor for conveying transport containers

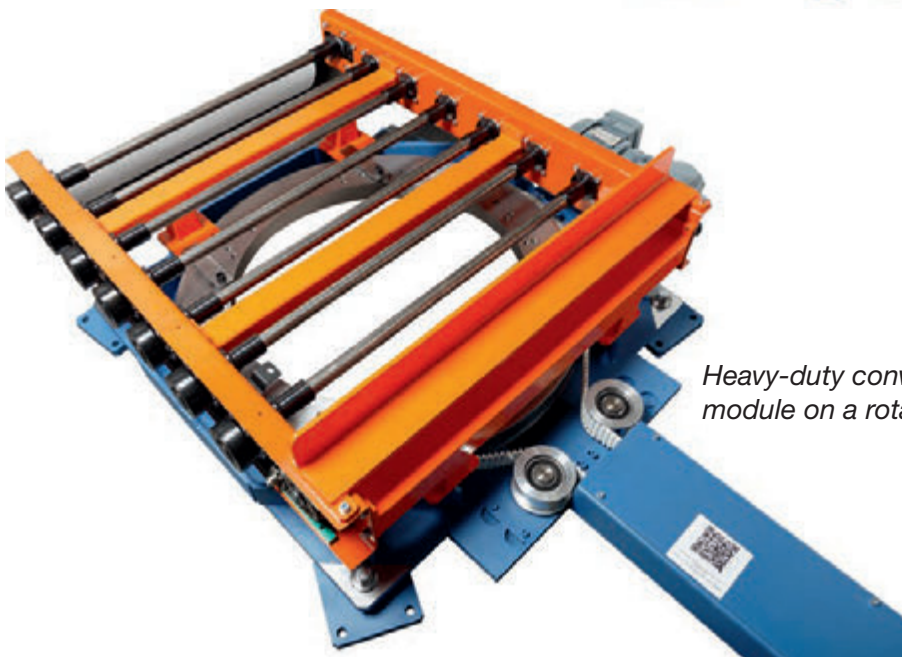


Heavy-duty conveyor as module on a rotating plate

CONVEYING

Container Systems

- Bin Rotating System
- Bin Changeover System
- LCA Component Tray
- Stacking Columns






Component Bin System


Stacking bins and racks into which the individual components are accurately transported into their defined positions play an important part in the automated logistics of automobile manufacture.

With these precision bins, the components are automatically loaded and unloaded. This section of the catalogue contains information about component carriers, stacking columns, LCA Low Cost Automation trays and bin systems with which the carrier can be replaced in the cells.

- Bin Changeover System with integral rotating table for 180° reverse operation
- Simple, extremely slim rotation unit for loading and unloading bins
- External location of the motor for the SOPAP TXR optimises the assembly space and increases the ease of maintenance
- Optional guaranteed ram protection and position definition unit for increased safety during loading and unloading

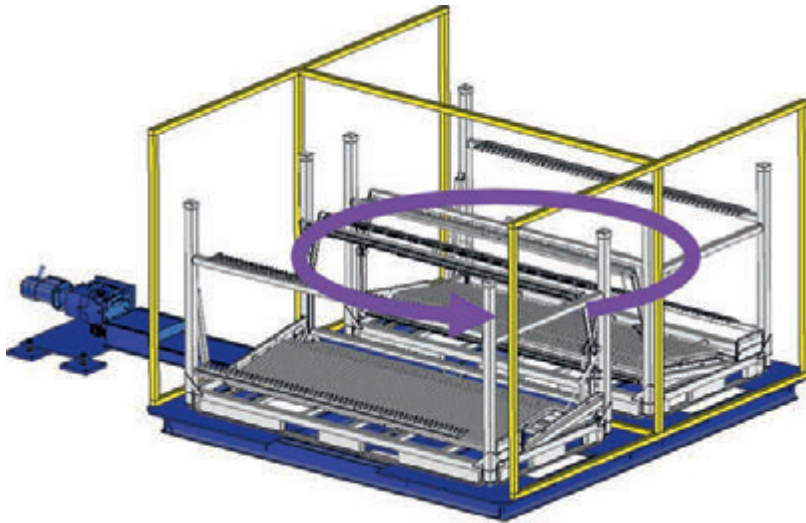


- Diameter: 3 to 6 metres
- Load capacity: up to 6,000 kg
- Cycle time: approx. 15 to 20 seconds

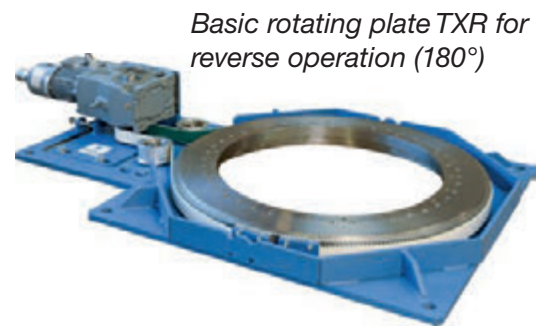

Basic rotating plate TXR for reverse operation (180°)

Slimline construction: < 200 mm


Typical application

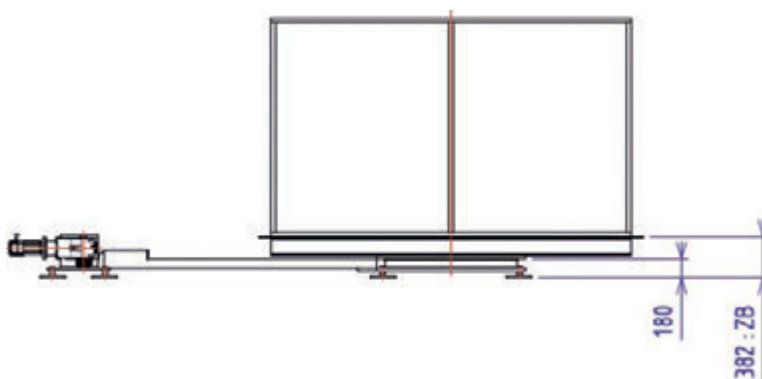

SOPAP TXR 1100 with basic framework and external motor mounting


Bin Changeover System

Changeover system with which the bins arranged in tandem and exchanged by means of a lifting and indexing system

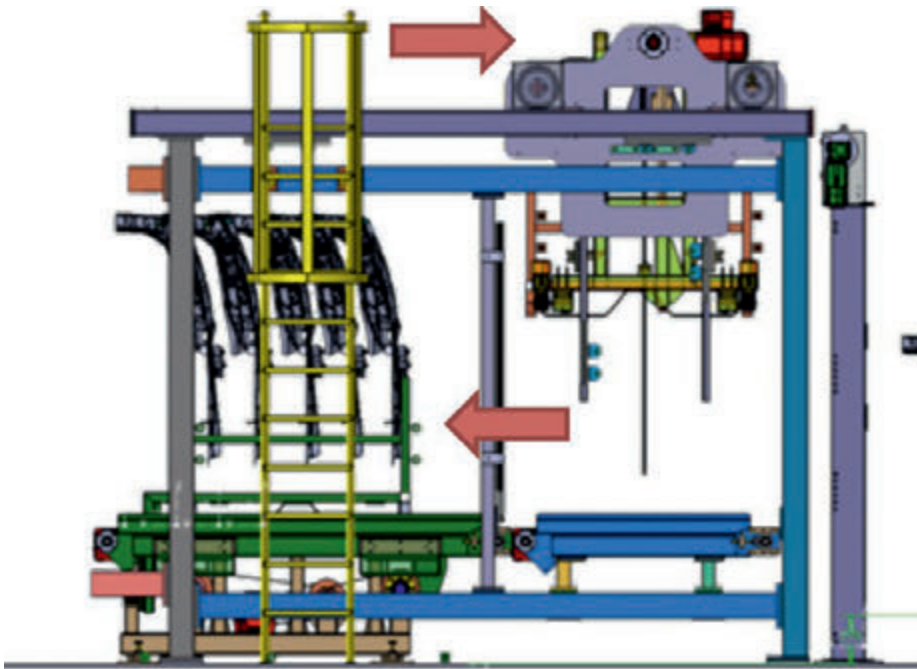

- Stacking function for bins in all floor positions
- 3 bins per system, simultaneously
- Lifting units for the conversion function
- Can be configured to clients' specifications
- Typical application is loading using forklift vehicles, removal by the robot



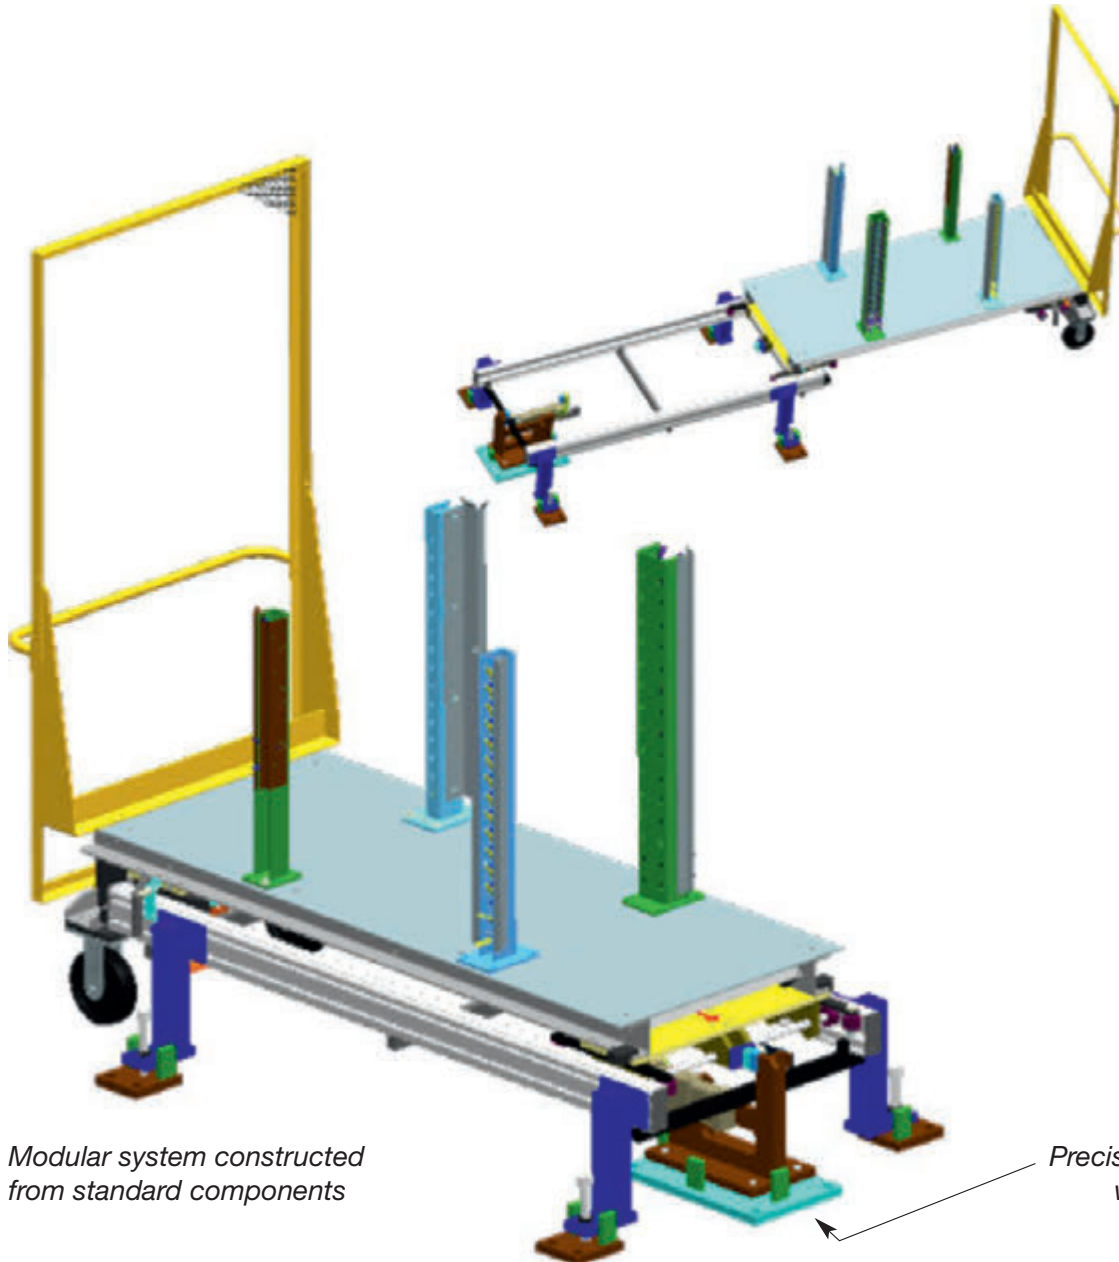

Modular system constructed from standard components


Precision XYZ referencing with position locking

- Ergonomic, lightweight square-section tube framework
- Precise carrier guide
- Precise end position
- Stacking columns
- Variable lengths and widths

New type of construction kit – Stacking column

Combine a standard foot with the column of your choice.

- Precision due to pinned mounting, no more welding
–> no temperature fluctuation
- Simple exchange for maintenance purposes
- Reproducible positioning
- Ideal for Body-In-White applications

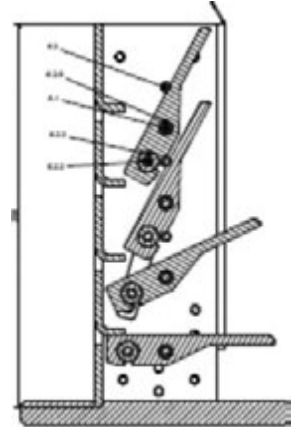

Profile latch

- Standard latch product
- High precision
- Available in steel with pivoting force or spring-loaded reset function
- Gravity reset function
- 10 and 20 mm width or dual latch configuration for stable component position




AL latch (K1)



Dual latch AL (K5)

Typical applications

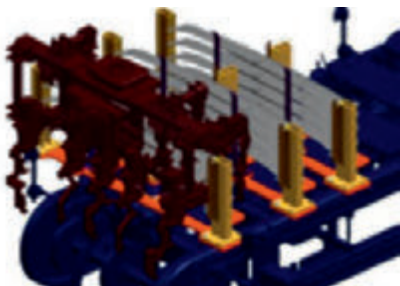

Latch store as accumulating conveyor pallet




Transport container with stacking towers

CONVEYING

Conveying Systems

- ‘Dragon’ Conveyors
- Distributor System
- Twin Conveyors







Conveying Systems


Complex conveying systems which, to some extent, are the alternative to conventional EHB systems. They do not only transport the components, they also distribute each individual component to different processing stations. An example of this is the 'dragon' conveyor, as well as the equally compact distributor system for three to four types.

DKN Conveyor System

- Accumulating conveyor system in overhead configuration
- Single belt lengths with one drive mechanism up to 25 metres, coupled systems up to 250 metres
- Component pallets with loading capacities up to 80 kg
- Can be extended to include lifting units and vertical cross beams to make complex conveyor installations

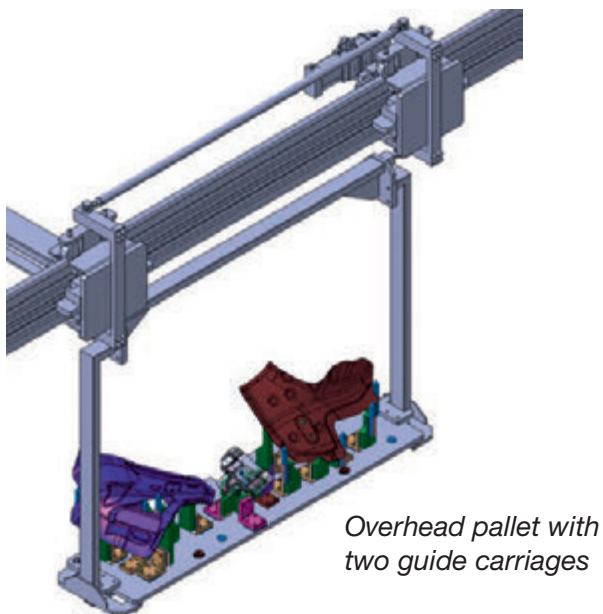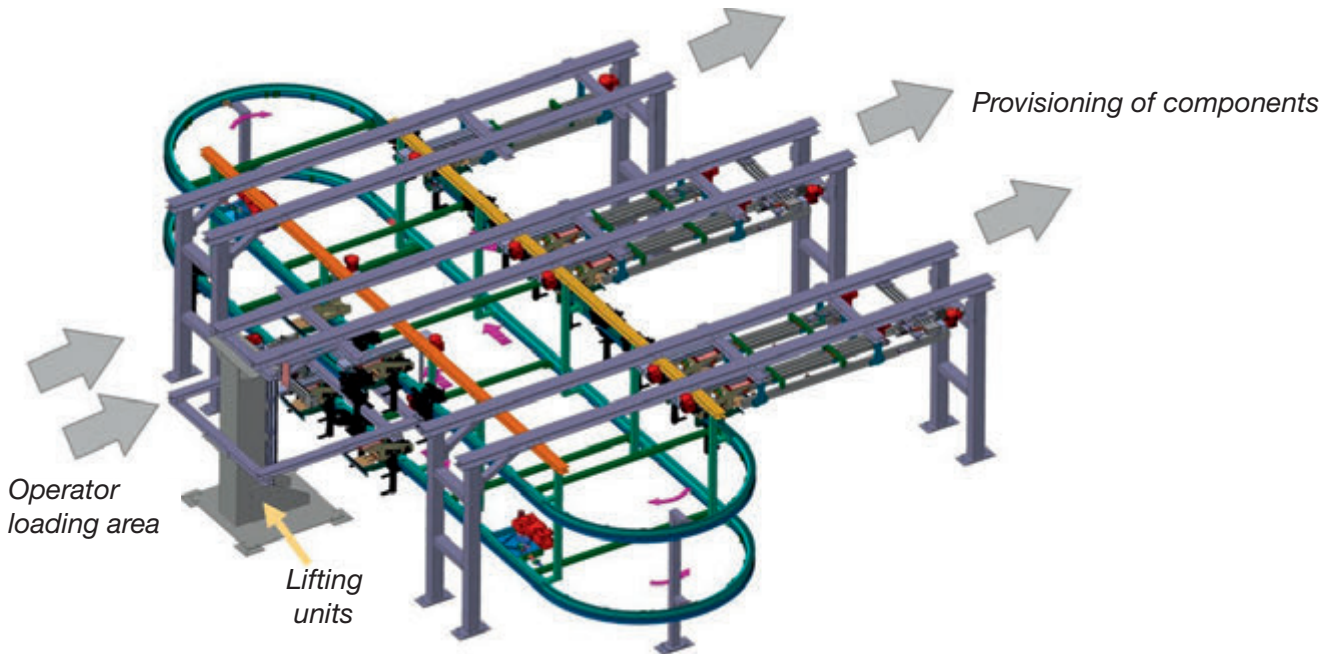


'Dragon' Conveyors

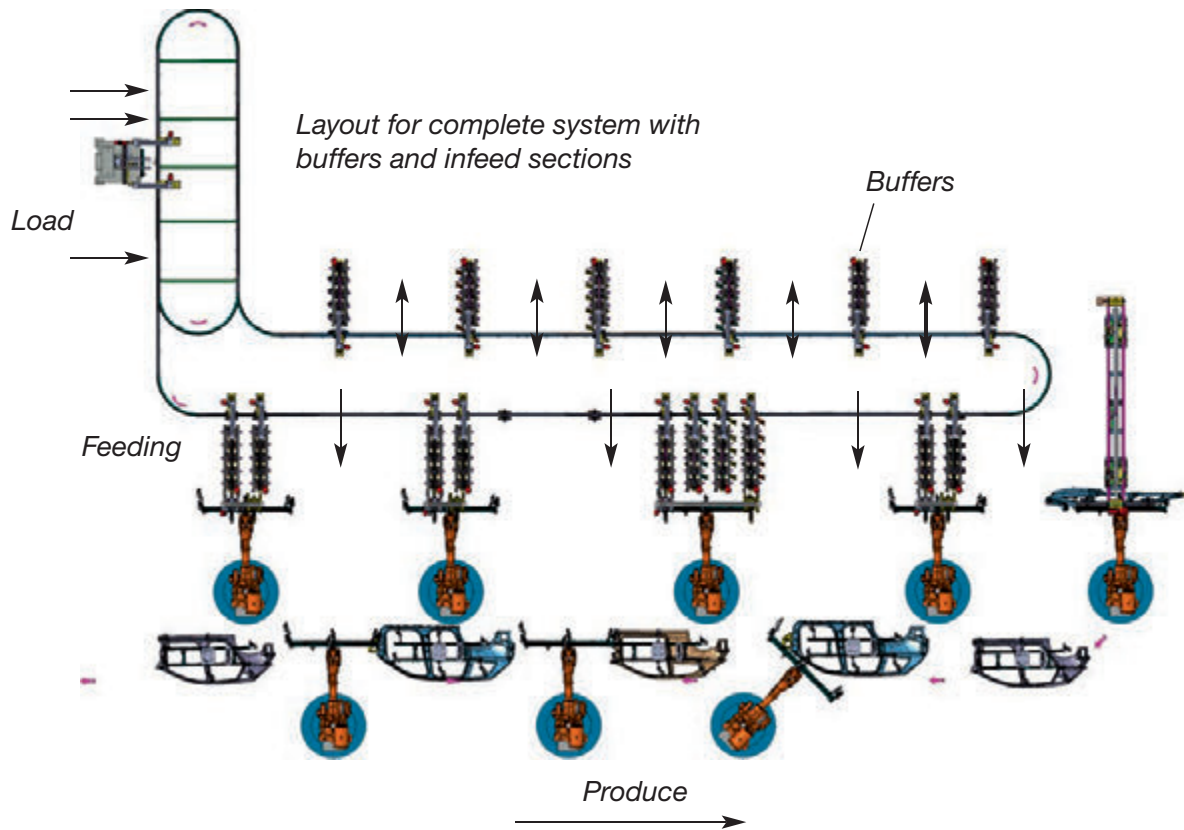




- Solution for floor-mounted intermediate storage and distribution of different types of component
- Decoupling over a small surface area (width instead of length)
- Distributor system replaces, for example, 3 separate accumulating conveyors

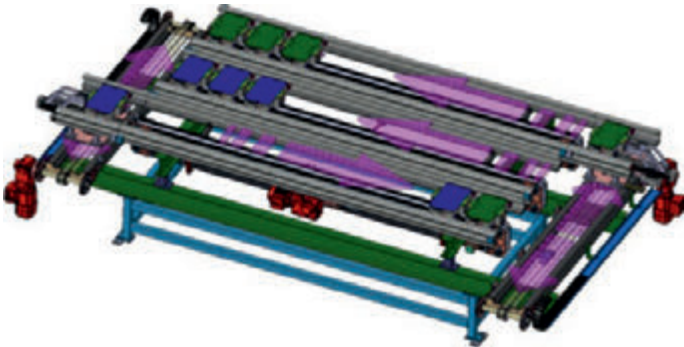

Advantages:

- All spare parts and parts subject to wear are based on the APM Accumulating Conveyor System
- Only one drive mechanism per direction of travel for all distributor sections
- Can also be used as an interconnection element

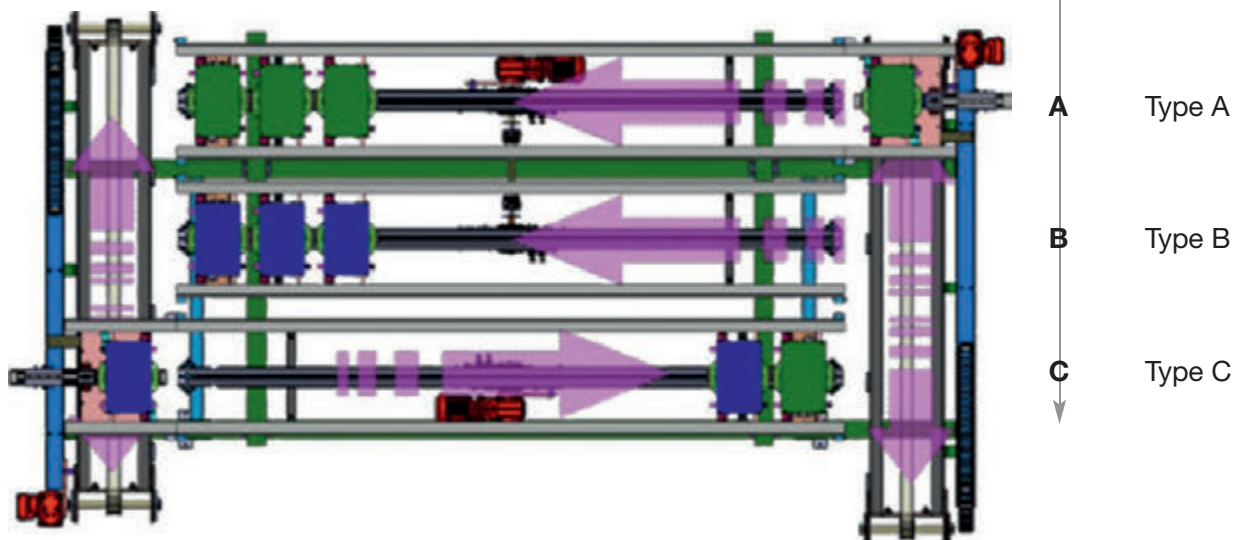

Extension of the proven single linear AFS-Accumulating conveyors to include two (twin) additional free axes


- Rotating
- Lifting
- All components based on the AFS System
- No additional spare parts



– With the new Twin Module, many paths and special tasks can be reproduced with one classic accumulating conveyor.



Rotary Module

- The segment is rotated, as with the pallet, in a friction-locked manner, so that no safety guard is required for the rotation.
- Due to the interconnection element developed in-house, the conveying module on the rotary segment does not require its own chain drive.

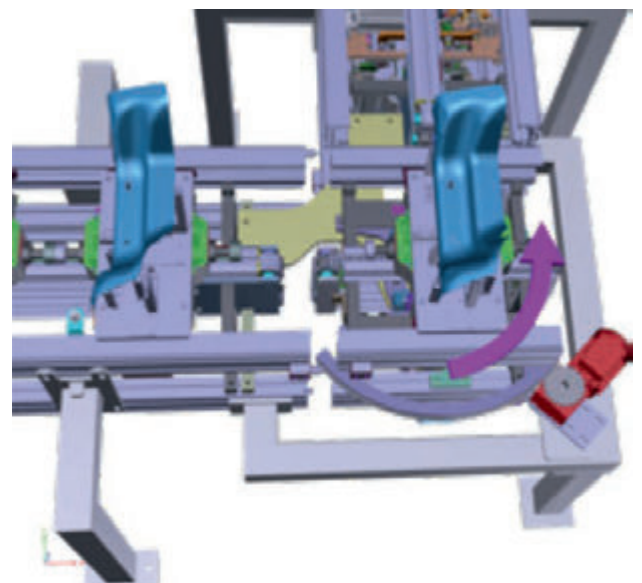


Lifting Module

Lifting system based on AFS accumulating conveyor components

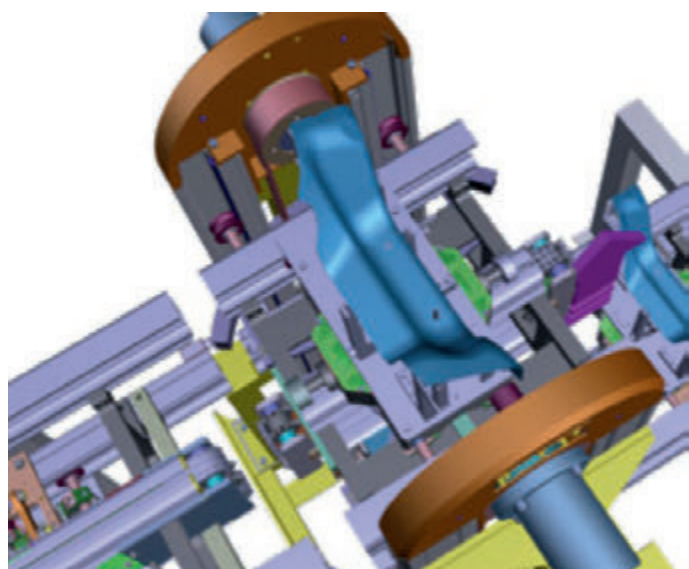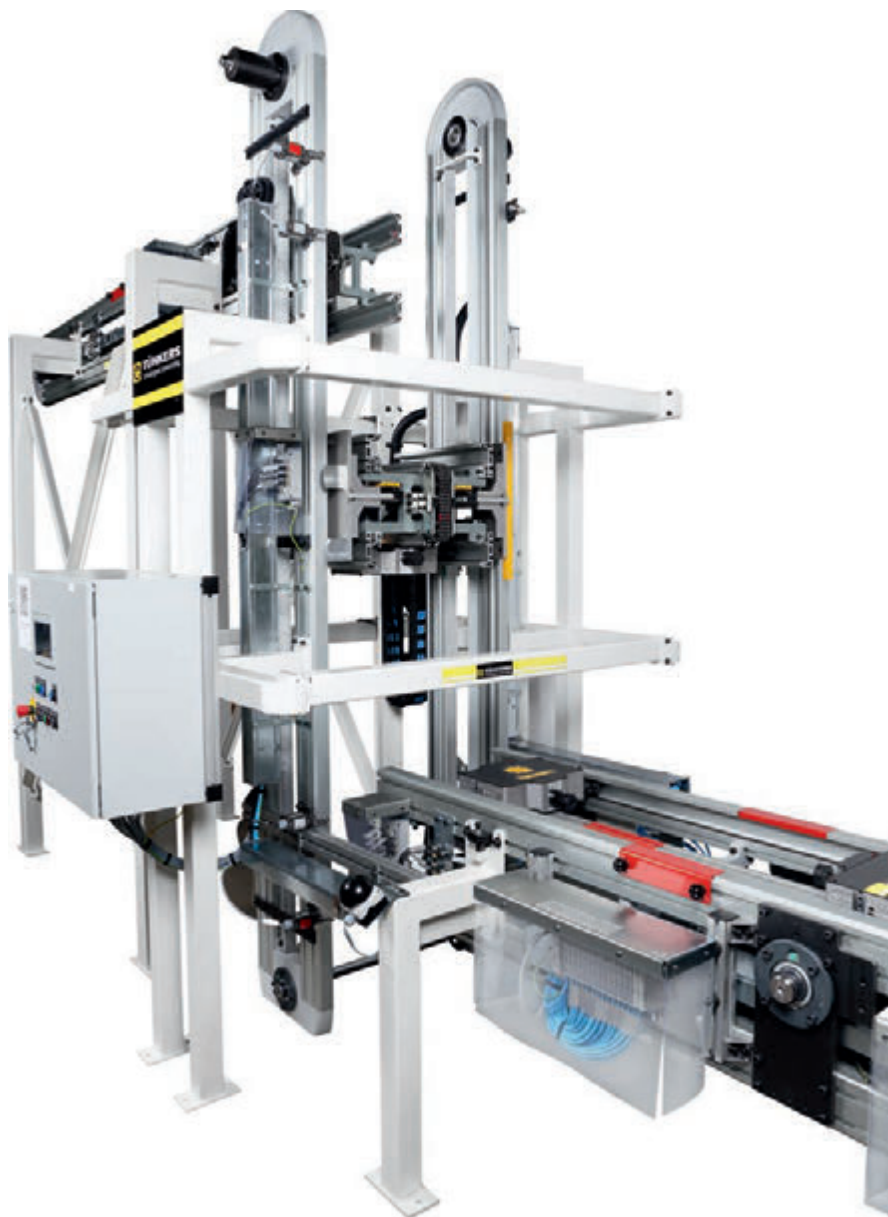

- The conveying module does not require its own chain drive since it is powered by the corresponding linear sections.

Example of a complete conveyor system with rotary and lifting modules

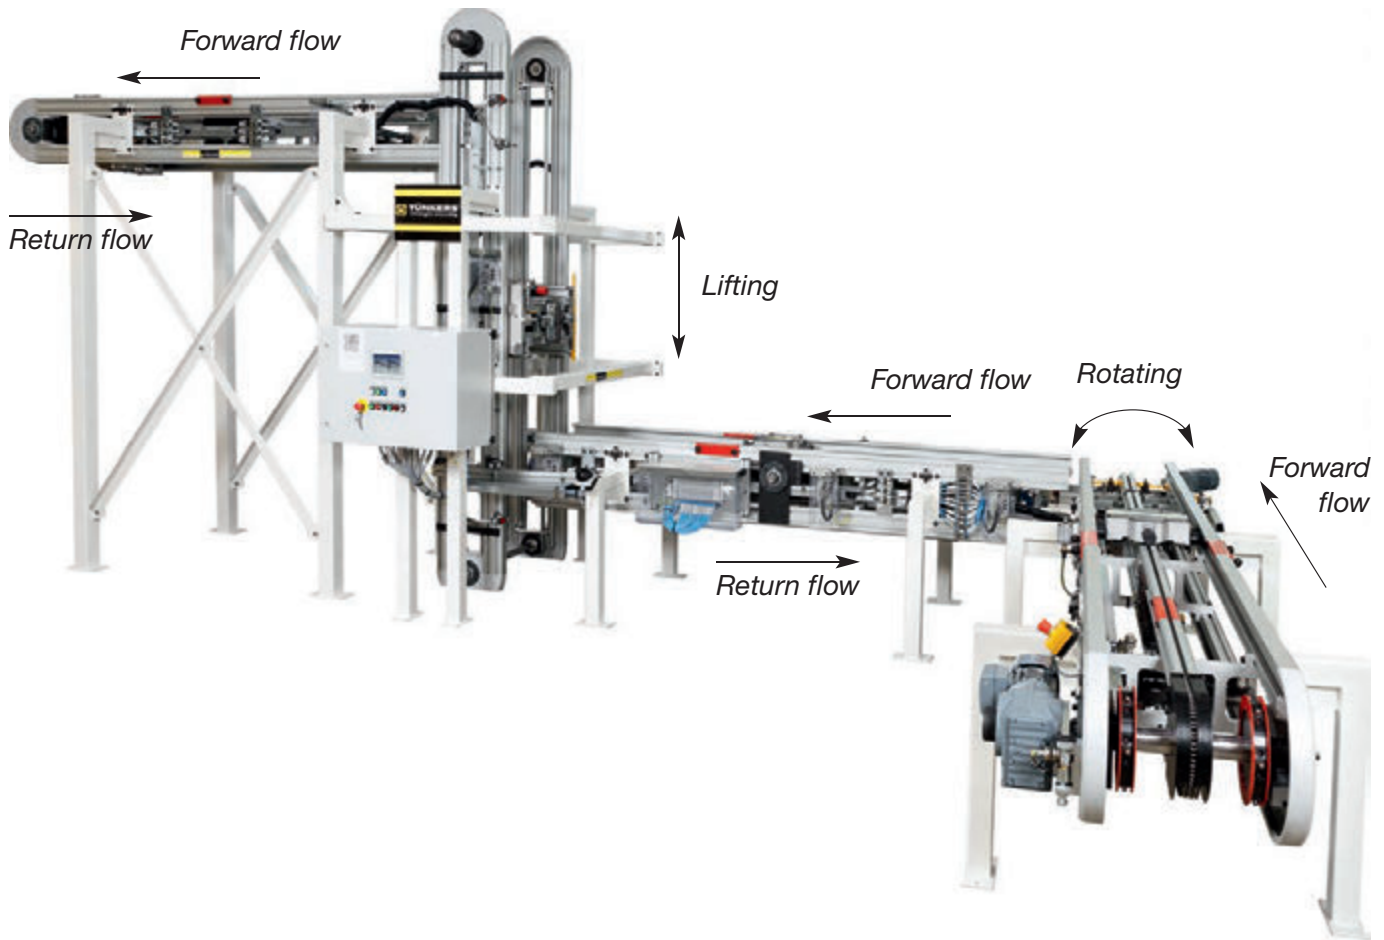


TRANSPORTING

Transportieren




Transporting

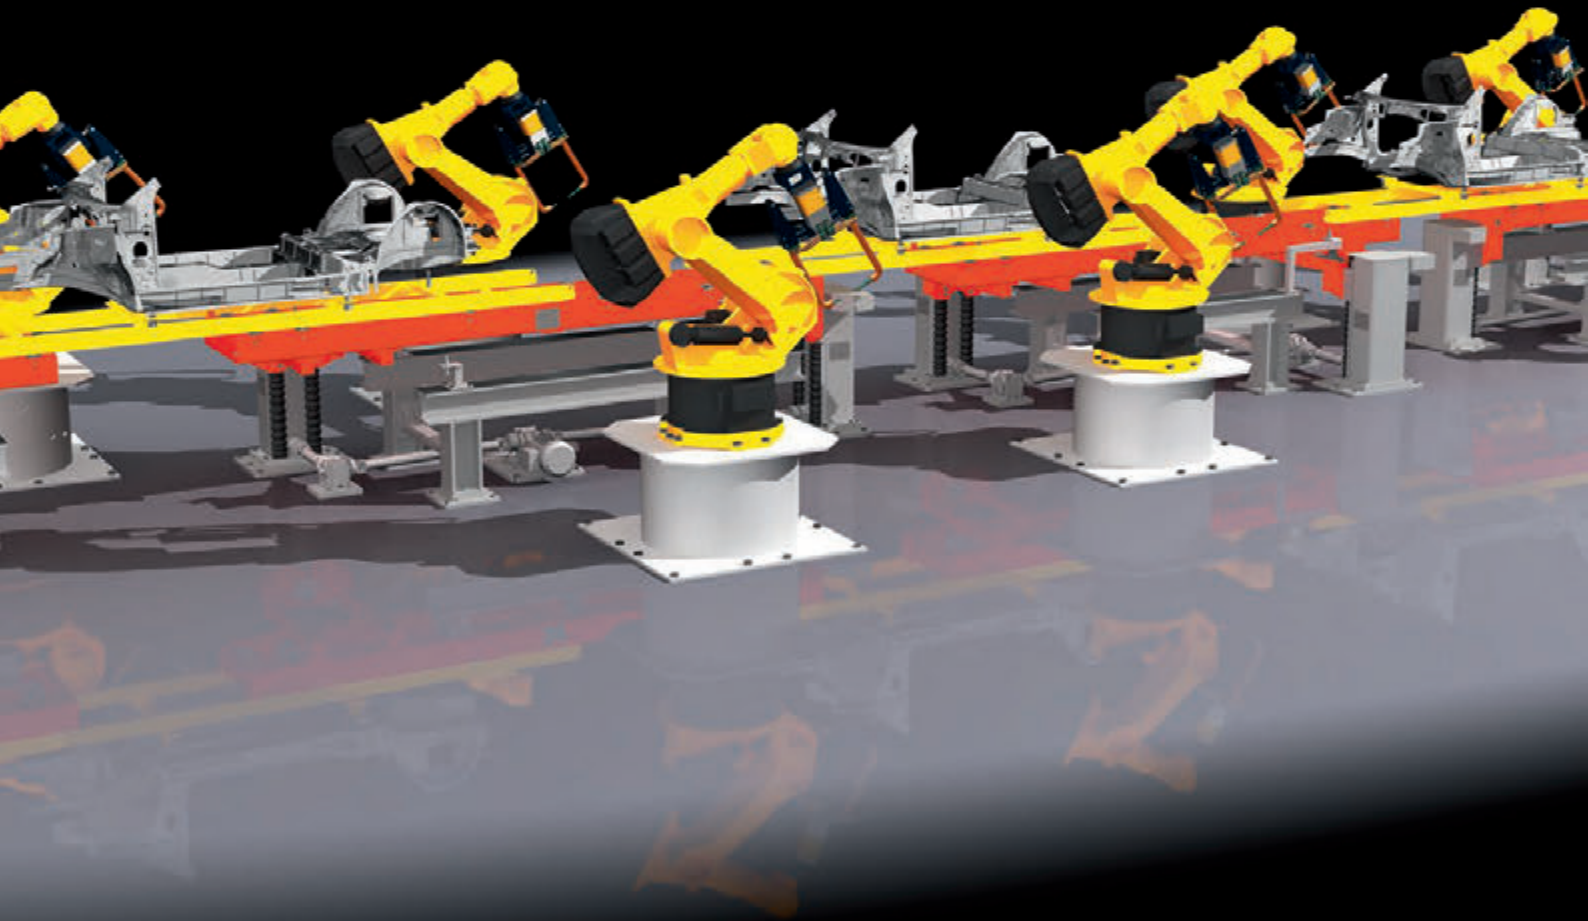



Transporting

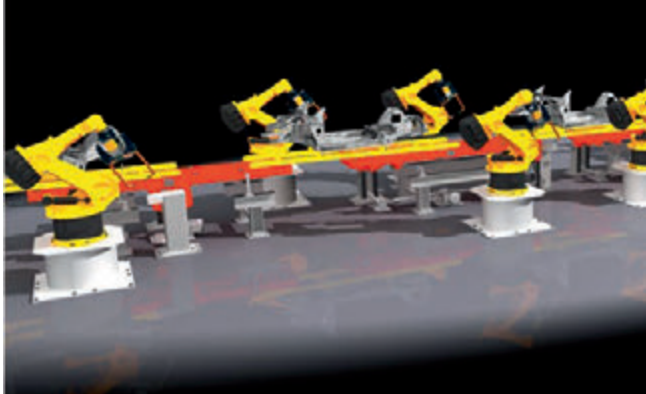


Lift Powered Rollerbed Line (LPRB)


The transportation module comprises electromechanical systems suitable to transport complex assemblies such as doors, side panels or the complete chassis in BIW workshops. The transport sections installed in production lines are designed as lifting beam systems, also called as shuttle systems, with a central drive. These systems have two central drives which take care of the lifting motion and the horizontal transfer. A further development of the L+S systems are the Lift Powered Rollerbeds, featuring decentralized drive mechanism and offering a higher efficiency and more flexibility with regards to space availability and performance.

Cam lifter for optimum lifting profile

An essential feature of the LPRB systems used in body shops is the requirement for a gentle component pick-up in order to reduce the impact noise as well as the wear on the lifter and the component itself. This lifting profile is achieved with zero speed at the transfer point and with high acceleration and deceleration processes by means of the EXPERT TUNKERS indexing cam, which has a correspondingly milled motion profile. In the case of cams with a constant pitch, so-called flex cams, the desired lifting profile is achieved via the servo control.

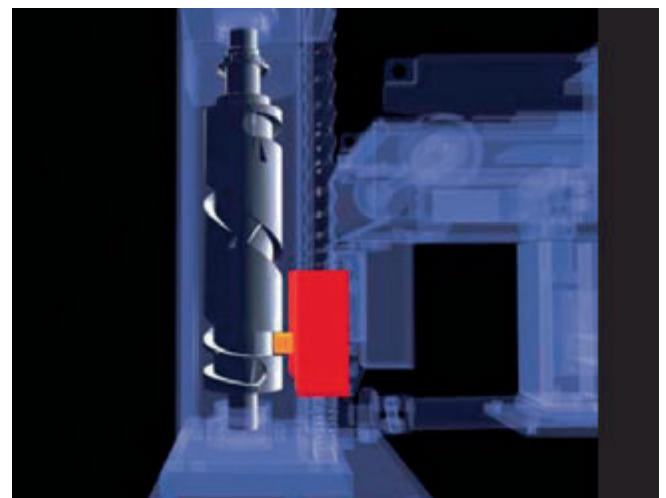

Soft touch pick-up

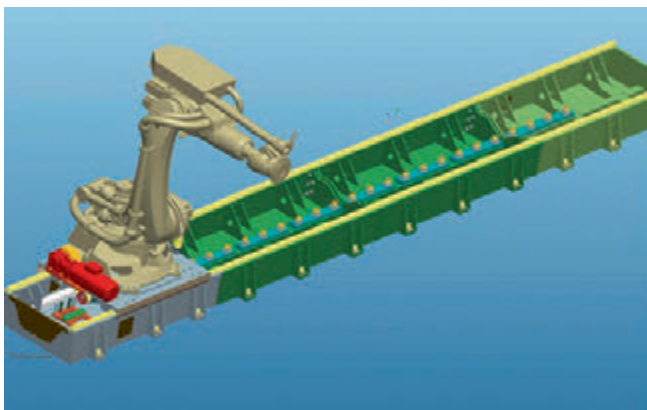

7th axis for robots

Buffer / Cross Transfer and Alternative Transport Solutions

The transport lines are supplemented by appropriate components such as buffer / storage system, cross transfer conveyor, ring accumulating conveyor, lifting and rotating units and level elevator, which feeds the component into the upper level conveyor system. This technology is also used in the heavy duty applications such as transportation of complete tooling or robotic systems (7th axis).

Lift Powered Rollerbed _____



9-4

Lift and Shift System _____



9-7

Dual Box Lifter _____



9-8

Mono- / Duorail Shuttle _____



9-9

Lift and Rotate Unit _____



9-10

Skid Conveyor _____



9-11

Level Lifter _____



9-12

7th Axis _____



9-13

Tool Changing System _____



9-14



Customer Load (Skid and Body)	200-2.000 kg
Horizontal stroke	4.000-10.000 mm
Vertical stroke	300-1.200 mm
Cycle time (Lifting-Transporting-Lowering)	≥ 7 s

Lift Powered Rollerbed

Conveying system for automotive body plants for the safe and precise positioning of skids with car bodies or body parts in independent station design.

- Safe and fast transport
- Smooth component transfer
- Flexible determination of the pick-up position
- Compact design
- Extremely low maintenance
- Long life span
- Flexible positioning of the lifting columns for optimum accessibility of the robot to the component

Lift column with cam and cam follower technology

The cam shaft and the robust linear rails are the core elements of the Expert Tünkers Lifter columns. The lifting station is formed by two lifting columns which are driven by a central gear motor and synchronized by means of a cardan shafts.




All-Electric Lift Powered Rollerbed

All Electric Lift Powered Rollerbed with laser positioning of the skid and flexible underbody clamping technology

- Time saving approx. 1 second
- Cycle time less than 7.5 seconds possible
- Accurate skid positioning via laser distance measurement
- Variable skid positioning on the rollerbed possible
- Electric stopper to prevent overrun
- Electrically operated skid locator
- No pneumatics, i.e. no valve unit

Customer Load (Skid + Body)	200-2.000 kg
Horizontal stroke	4.000-10.000 mm
Vertical stroke	300-1.200 mm
Cycle time (Lifting-Transporting-Lowering)	≥ 7 s

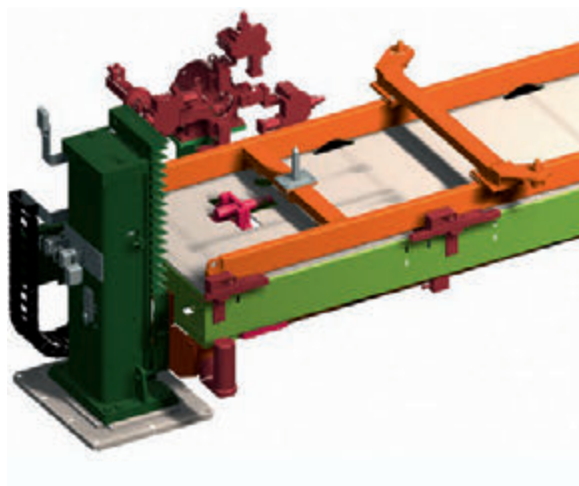


Rollerbeds

Frame made of metal sheet, incorporating the mechanically synchronized driven rollers, gear motor, skid locator and positioning devices. Optional with cover plates. Designed according to customer specification.


Customer Load (Skid + Body)	up to 1.500 kg
Length of rollerbed	up to 7.500 mm
Width of rollerbed	1.200 mm
Travel speed of the skid	max. 2,5 m/s



Lift powered rollerbed in upperbody line

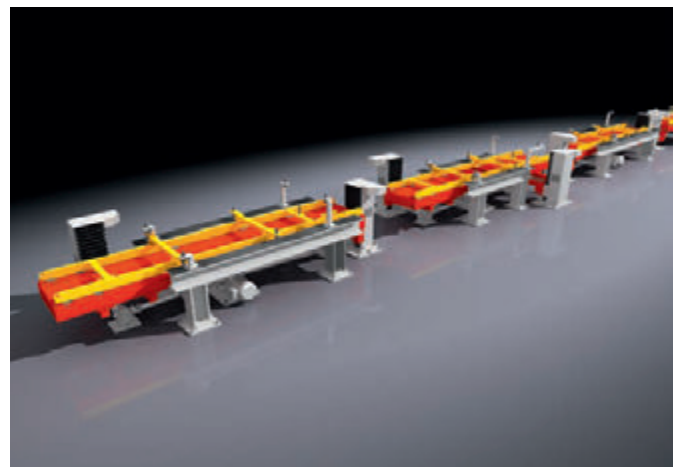

Example of a complete welding line

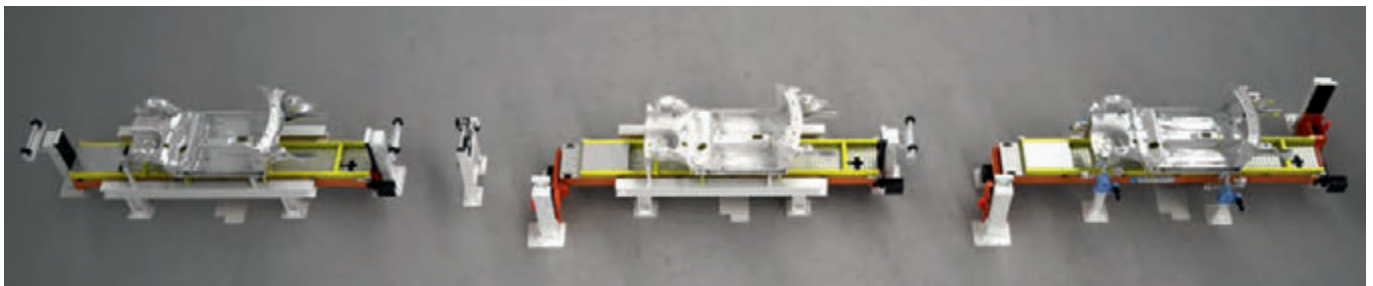

EGV Flexible underbody clamping technology

Index drive units EGV 90 / 125 with an integrated precision interlock for the flexible production of up to four different types of vehicles in one production line.

This extremely compact unit features a drive flange which is mechanically locked in the dwell position by means of an individually mounted latch. This design helps to absorb the high forces during the transfer of the body.


- Flexible production with up to four different types of vehicles
- High static load bearing capacity in the working position
- No additional locking device required

Type	EGV 090	EGV 125
Max. permissible static tangential moment	800 Nm	2680 Nm
Max. permissible tilting moment	1000 Nm	3400 Nm
Rotating time for 90°	2 s	2 s
Repeatability at $r = 400 \text{ mm}$	$\pm 0,1 \text{ mm}$	$\pm 0,05 \text{ mm}$


EXPERT TÜNKERS Lift-Powered Rollerbed with integrated underbody clamping technology



EGV Tool Changing Device / "Windmill"

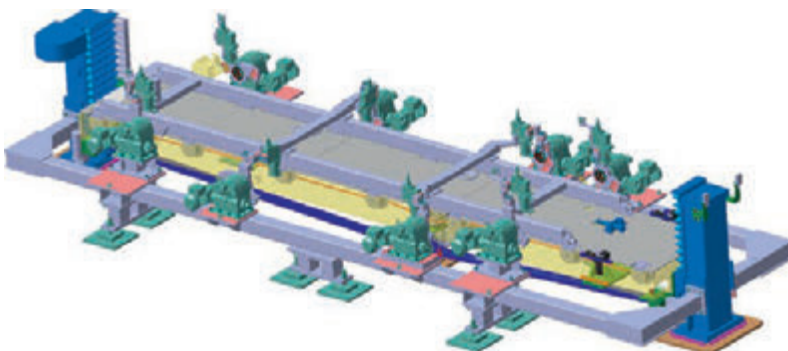

Application: LPRB with flexible underbody clamping technology

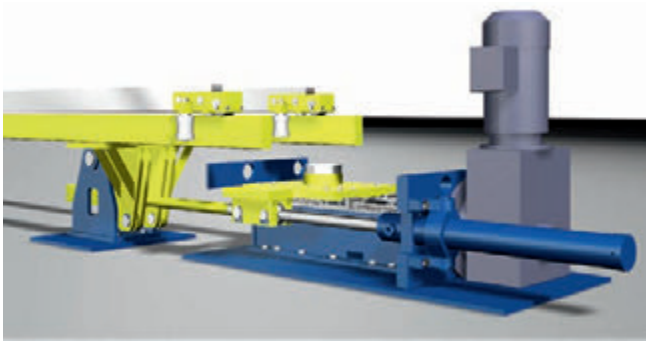

Customer load	50-500 kg/Station
Number of stations	3-15
Horizontal stroke	3.000-8.000 mm
Vertical stroke	300-1.200 mm
Cycle time (Lifting-Transporting-Lowering)	≥ 10 s



BIW conveying system for the safe and precise positioning of car bodies or body parts in interlinks operation.

- Safe, accurate and fast transport system with lifting and traversing axis for large components
- Synchronous component transport across all stations
- Simple design, only one central drive for lifting and conveying each component
- Expert crank drive with mechanical locking-in at end position
- Overrun of the end position is not possible

Lift & Shift drive unit

The Indexing cam of the longitudinal drive unit is the core element of the shuttle system.

The high-performance cam follower transmits the power to the linear carriage. The mechanically synchronized connection to the lever mechanism of the lifting shuttle is effected via the pull rod.

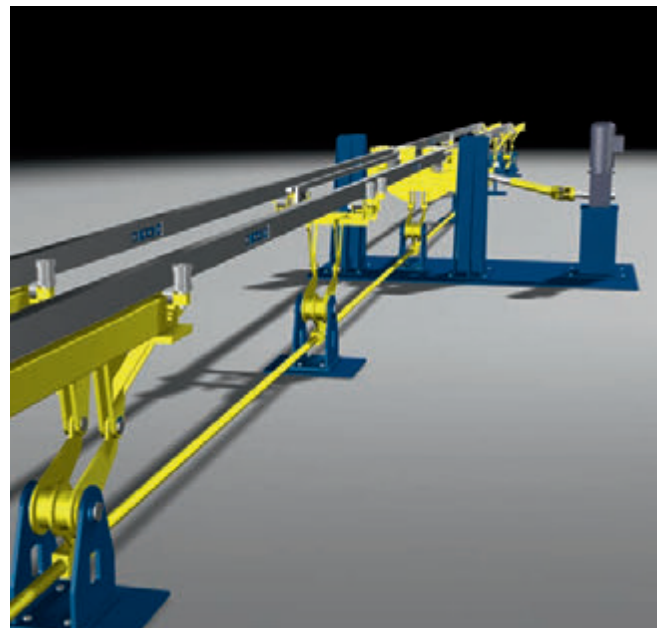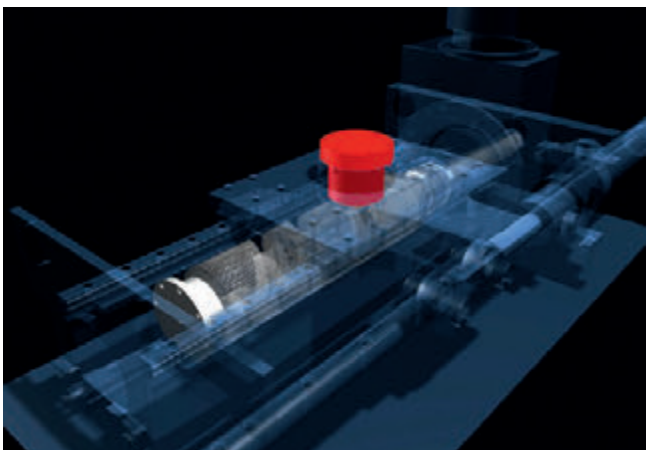


Dual Box Lifter

Low profile rollerbed lifter with integrated spring suspension system

- 30% less energy consumption by using the potential spring energy
- Minimum space requirement
- No interfering edges for robotic welding guns
- Smooth component transfer
- Flexible determination of the takeover position

Customer load (Skid + Part)	200-1.000 kg
Horizontal stroke	4.000-10.000 mm
Vertical stroke	200-800 mm
Cycle time (Lifting-Transporting-Lowering)	≤ 6 s

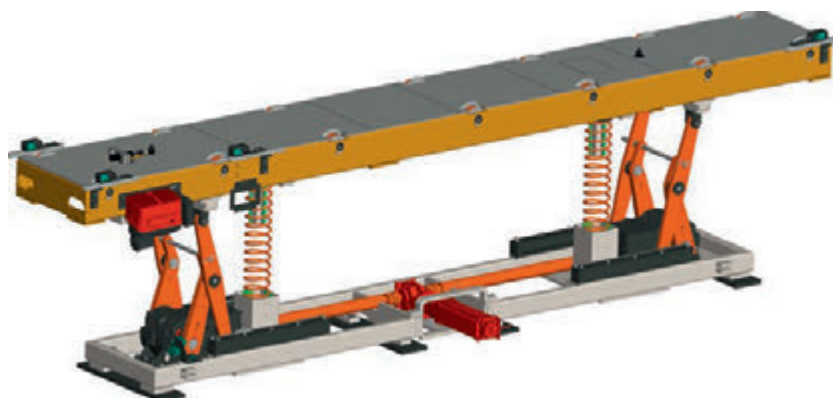


In retracted position - extremely flat design for optimum accessibility.



Eccentric Lifter


- Lifting system for short strokes at normal transport times

Customer load (Skid + Part)	200-2.000 kg
Vertical stroke	50-200 mm
Lifting time	≤ 2 s

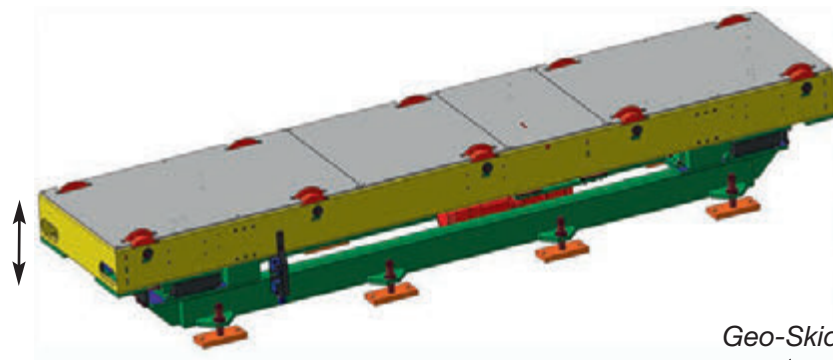


Geo-Skid

Skid conveyor system with eccentric lifters at the working level and rollerbeds at the skid return level

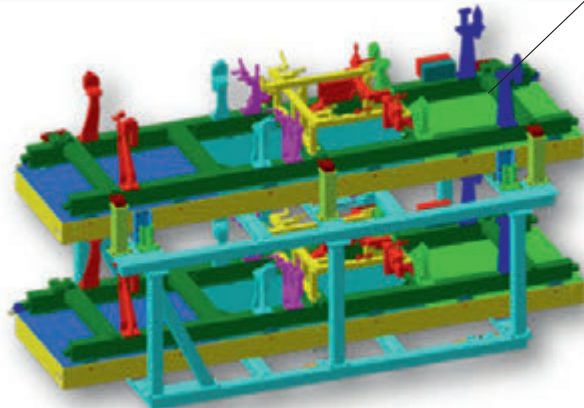

Upper working level – Transport direction Lift station


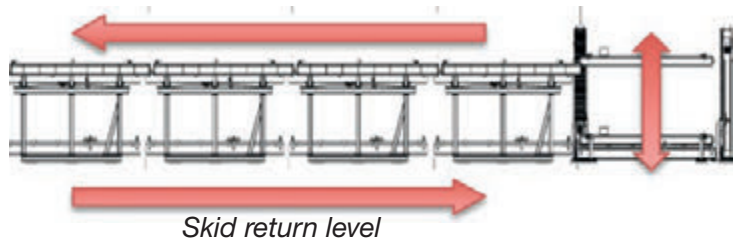


Skid return level


Conveyor line consisting of a horizontal linear axis and two synchronized lifting columns. Particularly suitable for transporting small components at low loads.

- Transport system for add-on components (e.g., doors and closures)
- Application: Gluing, clinching
- Modular and flexible construction
- Economical solution for the transport of small components


Customer load	10-250 kg
Horizontal stroke	1.000-5.000 mm
Vertical stroke	300-1.500 mm
Cycle time (Lifting-Transporting-Lowering)	≥ 5 s

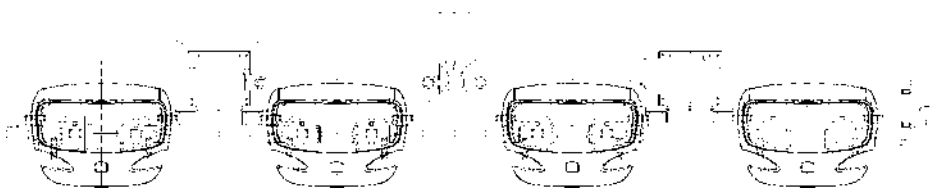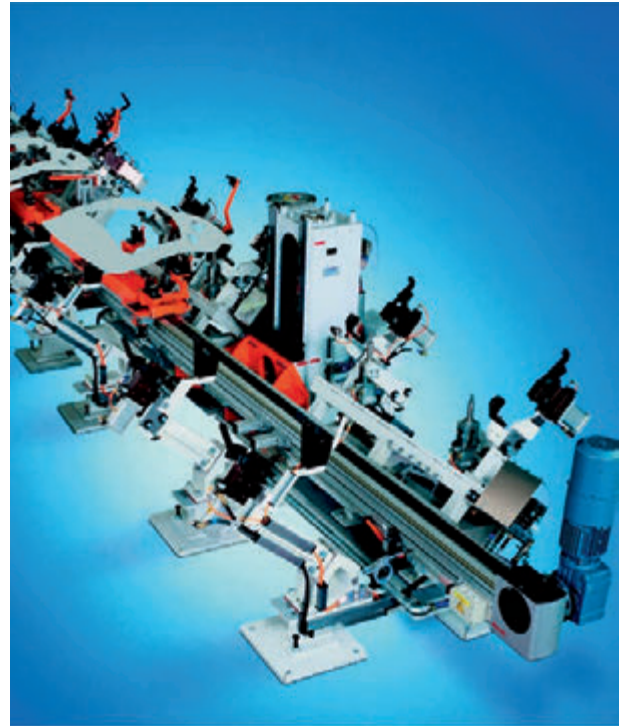

Monorail Shuttle for bonnets

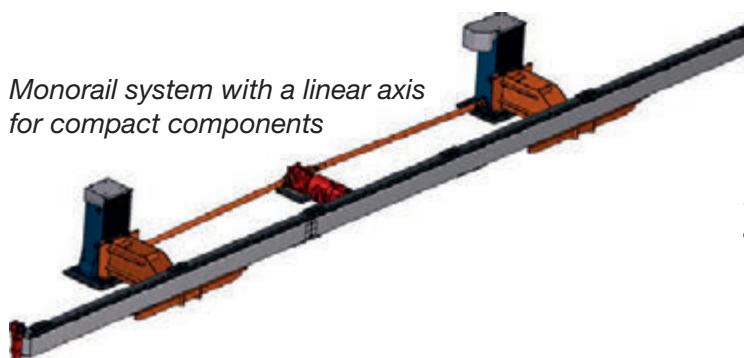

Monorail system with a linear axis for compact components

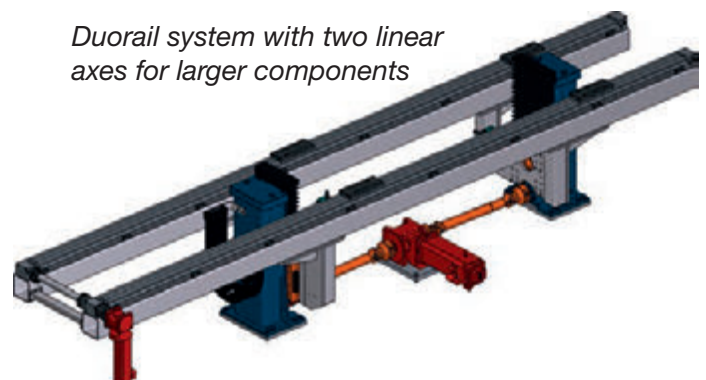


Duorail system with two linear axes for larger components

Lift and rotate unit for manipulating car bodies

- Applications: Testing stations, rework stations, stud welding stations
- Modular design consisting of EXPERT standard components using cam lifters and trunnion system.
- Minimum space requirement

Customer load (body and frame)	50-3.000 kg
Vertical stroke	1.200-2.800 mm
Lifting time	3-10 s
Indexing angle	flexible

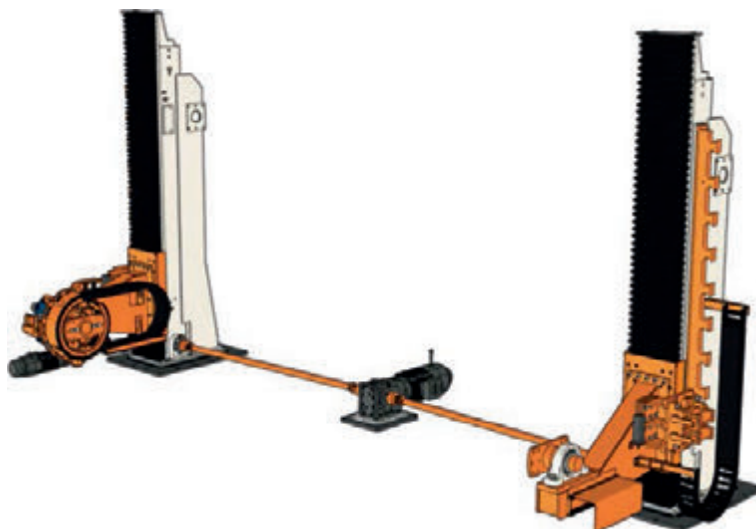

Example of a lift/rotate unit incorporated into a roller conveyor section

Skid Cross Transfer Conveyor

Cross transfer conveyor system for skid storage and separation.

- Modular horizontal storage unit for skids with car body
- Component storage for separation from production lines
- Flexible layout design



Customer load (skid + body)	200-2.000 kg
Horizontal stroke	2.000-10.000 mm
Vertical stroke	50-200 mm

Ring Buffer

Modular skid storage system based on the cross transfer conveyor system. Optimized to make the best use of available space on two levels.

- Modular horizontal/vertical storage for skid with car body
- Maximum storage capacity with minimum space requirements
- Component buffer for separation from production lines
- Flexible layout design



Customer load (skid + body)	200-2.000 kg
Horizontal stroke	2.000-10.000 mm
Vertical stroke	1.500-2.800 mm




Level Lifter


Lifting device for the transport of complete bodies from the welding plane to the second level of the conveyor system.

- Lifting device for loads up to max. 1500 kg
- Frame construction with I - Profiles
- Extremely narrow configuration due to the integration of roller guide and counter weights in profile frame.
- Safety technology according to the current OEM regulations
- Typical application: Lifting complete car body to the upper level of the conveyor system.

Customer load (skid + body)	150-1.500 kg
Vertical stroke	4.000-8.000 mm

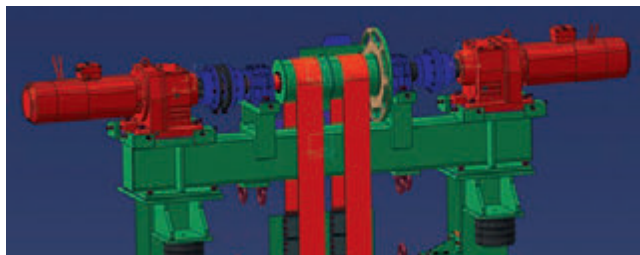

*Drive unit with safety feature
Two gearmotors and two lifting belts*

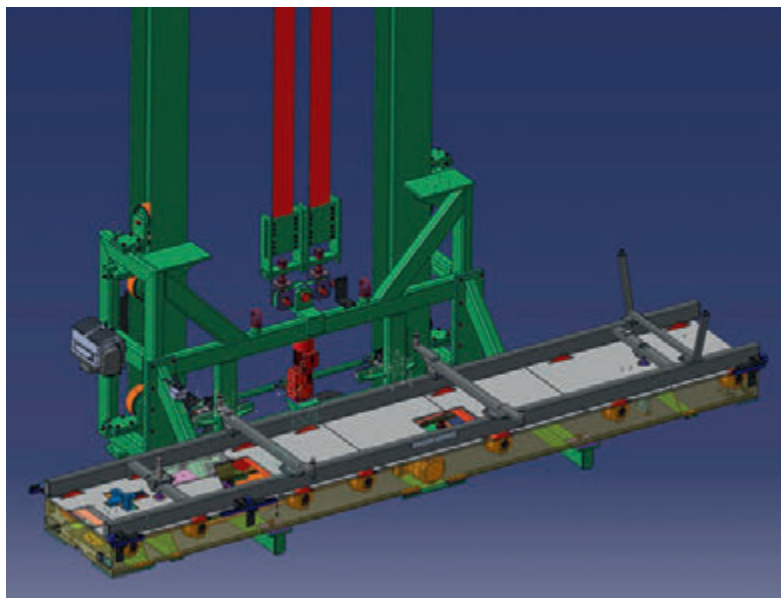


Lifting Carriage with rollerbed and skid

7th axis for robot redefined

- Linear transfer unit for robots
- Proven carriage drive by means of EXPERT-TÜNKERS cam and follower principle
- Precise cam engagement with the floor mounted cam followers
- Higher precision and performance than conventional rack & pinion systems
- Modular system
- Several robots on a single transverse axis possible


Robot and Customer Load	max. 4000 kg
Length of axis	up to 30 m
Travelling Speed	1-2 m/s

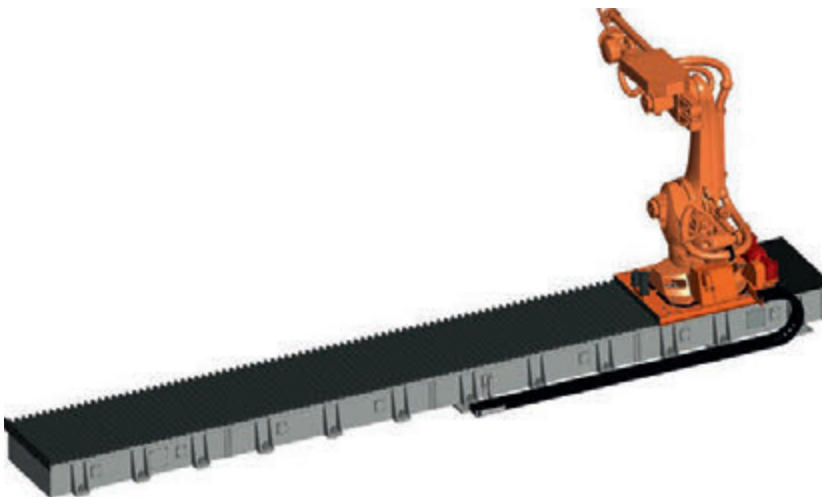

Floor mounted cam followers engaged in the drive cam



Evenly arranged cam followers

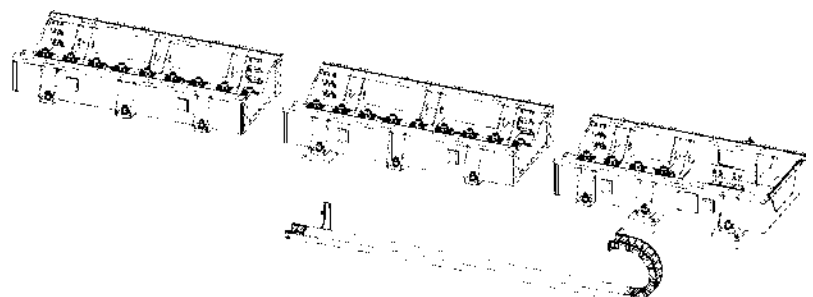



Tool changing system

Tool changing system based on Expert-Tünkers standard components such as rotary table, heavy duty rollerbeds and eccentric lifter.

- Workstation with eccentric lifter and tool locking system in work station
- EDH series rotary table as tool storage zone
- Compact design, optimum flexibility, reduced cycle times
- Individual customization possible

Customer load (skid and tooling)	up to 2.000 kg
Rotation speed	120° in 15 s
Total tool changing cycle	70 s



Tool storage zone on rotary table

[illegible]



TÜNKERS®
Ingenuity in series.

PRODUCTS FOR AUTOMATION

- Manual Clamps
- Quick Clamps
- Modular Clamps
- Swivel Clamps
- Pneumatic Clamps
- Pneumatic Gripper
- Pneumatic Cylinder
- Gripper Profiles
- Connection Elements
- Stamping Units
- Clamps B-Stock

SHOP.TUENKERS.DE



**ORDER EASILY
VIA TÜNKERS E-SHOP**

This way to the TÜNKERS Automation Modules:



At your service - worldwide



TÜNKERS Maschinenbau GmbH
Am Rosenkoth 4-12
40880 Ratingen
Germany
Tel.: +49 2102 4517-0
info@tuenkers.de
www.tuenkers.de



EXPERT-TÜNKERS GmbH
Seehofstraße 56-58
64653 Lorsch
Germany
Tel.: +49 6251 592-0
info@expert-tuenkers.de
www.expert-tuenkers.de



HELU GmbH
Seehofstraße 56-58
64653 Lorsch
Germany
Tel.: +49 6251 592-280
info@helu.de



SOPAP Automation SAS
P. A. Ardennes Emeraude
Rue Henri Faure
BP 11 09, 08090 TOURNES
France
Tel.: +33 3 24 52 94 64
sopap@sopap.com

ARGENTINA – TÜNKERS DE ARGENTINA S.A.
Velez Sarsfield 1516 – Quilmes (1879)
Provincia de Buenos Aires
Tel.: +54 11 2100-2900
info@tuenkers.com.ar

AUSTRIA – B-S-D Spanntechnik GmbH
Sportplatzstrasse 31
3385 Markersdorf
Tel.: +43 2749 72870-0
office@bsdustria.com

BALTIC STATES – Vertriebsbüro Ost
Markt 11
D-07426 Königsee
Tel.: +49 36738 42432
dieter.rauschenbach@tuenkers.de

BELGIUM – TÜNKERS Maschinenbau GmbH
Am Rosenkoth 4-12
D-40880 Ratingen
Tel.: +32 479 983611
frank.maertens@tuenkers.de

BRAZIL – Tünkers do Brasil Ltda.
Avenida Casa Grande, 850 – Galpão 6, 11 e 13
Bairro: Casa grande
09961-350 – Diadema - São Paulo
Tel.: +55 11 4056-3100
comercial@tuenkers.com.br

CANADA – TUNKERS North America
36200 Mound Road
Sterling Heights, MI 48310
Tel.: +1 248 362 9555
todd.moriarty@tuenkers.com

CHINA – TÜNKERS China
Tuenkers Machinery & Automation
Technology Co., Ltd. Shanghai
Building 4, No. 768 Chenxiang Road,
Jiading District, Shanghai P.R.
China, 201802
Tel.: +86 21 39171070
info@xin-tuenkers.com.cn
Other Offices: Changchun, Nanjing, Chengdu,
Beijing, Wuhan, Guangzhou, Yantai, Shenyang

CZECH REPUBLIC – Vertriebsbüro Ost
Markt 11
D-07426 Königsee
Tel.: +49 36738 42432
petr.cejka@tuenkers.sk

CZECH REPUBLIC – Kopta s. r. o.
Vážní 891 / areál PSN I
CZ-500 03 Hradec Králové
Tel.: +420 736285307
kopta@kopta.cz

DENMARK – Berga Maskin
64693 Gnesta
Tel.: +46 158 31112
info@berga-maskin.se

FINLAND – Berga Maskin
64693 Gnesta
Tel.: +46 158 31112
info@berga-maskin.se

FRANCE – SOPAP Automation SAS
P. A. Ardennes Emeraude
Rue Henri Faure
BP 11 09, 08090 TOURNES
Tel.: +33 3 24 52 94 64
sopap@sopap.com

HUNGARY – TÜNKERS Slovakia s.r.o.
Roentgenova 26
SK85101 Bratislava
Tel.: +421 905 564 691
juraj.rampasek@tuenkers.sk

INDIA – TÜNKERS Automation India Private Ltd.
402 Supreme Head Quarters 36
Mumbai-Pune Bypass
411008 Baner-Pune
Tel.: +91 98 60 699190
jayesh.keskar@tuenkers.com

INDONESIA – BESTARI (BME) LIFTECH MACHINERY
SDN BHD (954853-K)
No 5 Jalan Permata 9/KS09,
Jaman Perindustrian Air Hitam,
KM11 Jalan Klang Banting
41200 Klang, Selangor Darul Ehsan
Tel.: +60126219779 / +60172482233
info@bestari-bme.com.my

ITALY – TÜNKERS Italia
Strada TORINO, 43 sub. 06
10043 ORBASSANO-TORINO
Tel.: +39 011 5508264
a.michellone@tuenkers.it

JAPAN – TÜNKERS Japan Ltd.
Park Hills Chiyoda, Naka-ku,
460-0012 Nagoya, Japan
Tel.: +81 (0)52 212 8803
Mobile: +81 80 1772 5407
sven.otten@tuenkers.de

MALAYSIA – BESTARI (BME) LIFTECH MACHINERY
SDN BHD (954853-K)
No 5 Jalan Permata 9/KS09,
Jaman Perindustrian Air Hitam,
KM11 Jalan Klang Banting
41200 Klang, Selangor Darul Ehsan
Tel.: +60126219779 / +60172482233
info@bestari-bme.com.my

MOROCCO – SOPAP Automation SAS
P. A. Ardennes Emeraude
Rue Henri Faure
F-BP 11 09, 08090 TOURNES
Tel.: +33 3 24 52 94 64
michel.andre@tuenkers.de

MEXICO – TUNKERS DE MÉXICO S.A. DE C.V.
Prolongación Uranga No. 93 C
Colonia Sanctorum, Cuautlancingo
Puebla, C.P. 72730
Tel.: +52 222 393 5547
christian.volkmann@tuenkers.mx

NETHERLANDS – TÜNKERS Maschinenbau GmbH
Am Rosenkoth 4-12
D-40880 Ratingen
Tel.: +32 479 983611
frank.maertens@tuenkers.de

POLAND – TÜNKERS Slovakia s.r.o.
Roentgenova 26
SK85101 Bratislava
Tel.: +48 660 055 225
jaroslav.rozmiarek@tuenkers.sk
www.tuenkers.sk

ROMANIA – TÜNKERS Maschinenbau GmbH
55068 Sibiu, Romania
Tel.: +40-752 184 548
traian.moga@tuenkers.sk

RUSSIA – WEST-RU
Novikova-Priboya Str. 4 office 407
603058 Nizhny Novgorod
Tel.: +7 831 253 01 65

RUSSIA – Cont Group
Office 315, Sibirskij Proezd 2-27
Moscow 109316
Tel.: +7 495 775 - 0377

SERBIA – TÜNKERS Maschinenbau GmbH
55068 Sibiu, Romania
Tel.: +40-752 184 548
traian.moga@tuenkers.sk

SINGAPORE – BESTARI (BME) LIFTECH MACHINERY
SDN BHD (954853-K)
No 5 Jalan Permata 9/KS09,
Jaman Perindustrian Air Hitam,
KM11 Jalan Klang Banting
41200 Klang, Selangor Darul Ehsan
Tel.: +60126219779 / +60172482233
info@bestari-bme.com.my

SLOVAKIA – TÜNKERS Slovakia s.r.o.
Twin City C
Mlynské nivy 16
SK82109 Bratislava
Tel.: +421 905 564 691
juraj.rampasek@tuenkers.sk
www.tuenkers.sk

SLOVENIA – TÜNKERS Maschinenbau GmbH
55068 Sibiu, Romania
Tel.: +40-752 184 548
traian.moga@tuenkers.sk

SOUTH AFRICA – Demcon (Cape) cc
PO Box 15237
ZA-60110 Emerald Hill/Port Elizabeth
Tel.: +27 41 4847411
demcon@demcon.co.za

SOUTH KOREA – JC Systems Co. Ltd.
#405 Ace Highend 9Ch, 233,
Gasam digital 1-ro, Geumcheon-gu, Seoul
Tel.: +82 70 7012089
j3cho@chol.com

SPAIN – TÜNKERS IBÉRICA, S.L.
c/ Enric Prat de la Riba, 14b
08830 Sant Boi de Llobregat (Barcelona)
Tel.: +34 93 3952827
tunkers@tunkersiberica.com

SWEDEN – BERGA MASKIN
SE-646 93 GNESTA
Tel.: +46 158 311 12
info@berga-maskin.se

THAILAND – BESTARI (BME) LIFTECH MACHINERY
SDN BHD (954853-K)
No 5 Jalan Permata 9/KS09,
Jaman Perindustrian Air Hitam,
KM11 Jalan Klang Banting
41200 Klang, Selangor Darul Ehsan
Tel.: +60126219779 / +60172482233
info@bestari-bme.com.my

TURKEY – Cava Makina
İmes Sanayi Sitesi E 503
34776 Ümraniye / İstanbul
Tel.: +90 216 3809280
alp.varna@cava.com.tr

UK – TÜNKERS-EXPERT UK Ltd.
Unit 5, Ham Lane,
Kingswinford,
West Midlands.
DY6 7JR
Tel.: +44 (0) 1384 287690
neal.judge@tuenkers.de

USA – TUNKERS North America
36200 Mound Road
Sterling Heights, MI 48310
Tel.: +1 248 362 9555
todd.moriarty@tuenkers.com

VIETNAM – BESTARI (BME) LIFTECH MACHINERY
SDN BHD (954853-K)
No 5 Jalan Permata 9/KS09,
Jaman Perindustrian Air Hitam,
KM11 Jalan Klang Banting
41200 Klang, Selangor Darul Ehsan
Tel.: +60126219779 / +60172482233
info@bestari-bme.com.my